



.XX ±0.13 .XXX ±0.05

\	,	
ξ		OF
ハᠫ᠆ᡛ	H	

ISSUE NUMBER RIGINAL (1)

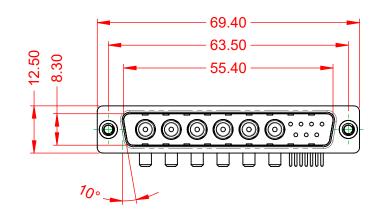




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




30A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
S TO FIVES ANCY. EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 629-13W6250-3TA		ISSUE	
		PART NUMBER: 629-13W	6250-3TA	1	



THIS SERIES FULLY CONFORMS THE EUROPEAN UNION DIRECTI 2011/65/EU FOR RoHS COMPLIAN

