


Data sheet | Item number: 706-3057/202-100










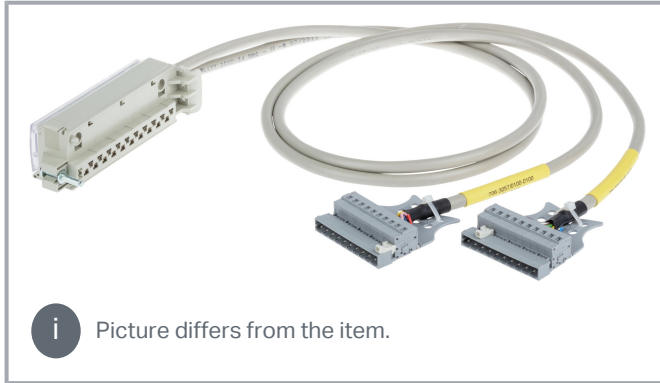


System cable; for Schneider TSX; 8 digital outputs for higher voltages;

Length: 1 m; Conductor cross-section: 0.34 mm²

www.wago.com/706-3057/202-100



 Picture differs from the item.

Color coding acc. to DIN VDE 47100	Connector WAGO 231 (JA)		PLC connector		
	Pin number	Wiring	Pin number	Signal	
White		1	OUT0.0	1	L0
Brown		2	OUT0.1	2	L1
Green		3	OUT0.2	3	L2
Yellow		4	OUT0.3	4	L3
Grey		5	OUT0.4	5	L4
Pink		6	OUT0.5	6	L5
Blue		7	OUT0.6	7	L6
Red		8	OUT0.7	8	L7
Black		9	L	5+10+ 15+20	C0-15
Violet		10	nc	nc	cn
Grey-Pink		11	nc	nc	nc
Red-Blue		12	nc	nc	nc

Data Notes

Note

If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Electrical data

Inputs/outputs	8 digital inputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Compatibility

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Schneider

Schneider TSX	TSX DSY 08S5
---------------	--------------

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	WAGO 231 Series
Pole number 1	10
Connection type 1	System
Wire cross-section	0.34 mm ²

Connection 2

Connector 2	Schneider TSXBLY01
Pole number 2	20
Connection type 2	System

Physical data

Cable length	1 m
--------------	-----

Material Data

Weight	223 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	FR
GTIN	4055143979788

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Customs tariff number

85444290900

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

pdf
545.9 kB

[Download](#)

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3057/202-100

[URL](#)

[Download](#)

System cable; for Schneider TSX; 8 digital outputs for higher voltages; Length: 1 m;
Conductor cross-section: 0.34 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.