
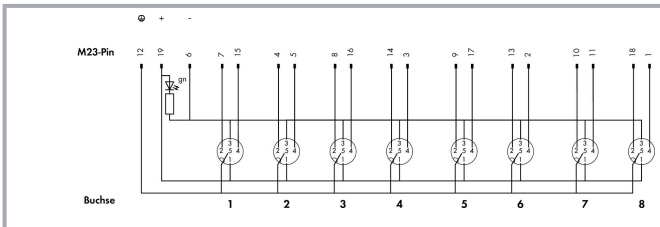
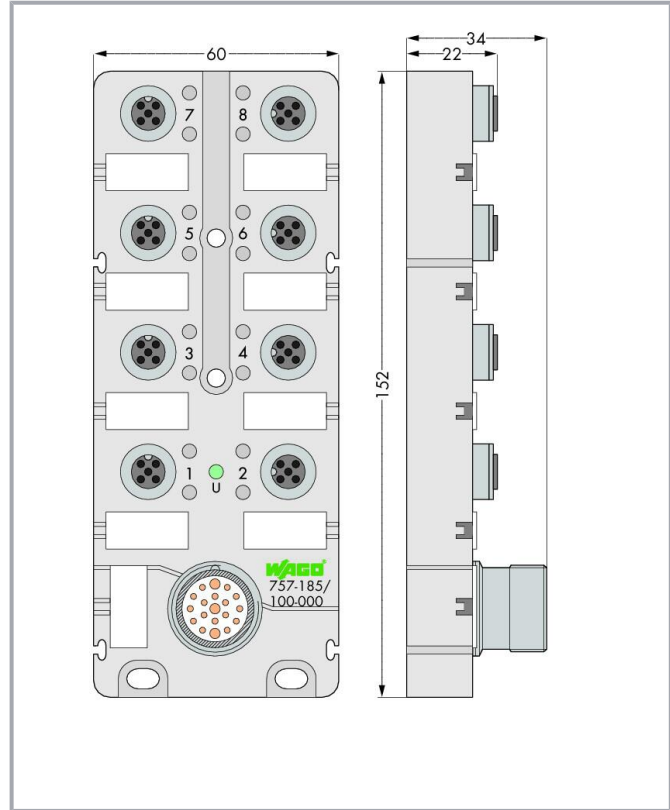


Data sheet | Item number: 757-185/100-000

M12 sensor/actuator box; 8-way; 5-pole; M23 connector; Without LED


[www.wago.com/757-185/100-000](http://www.wago.com/757-185/100-000)

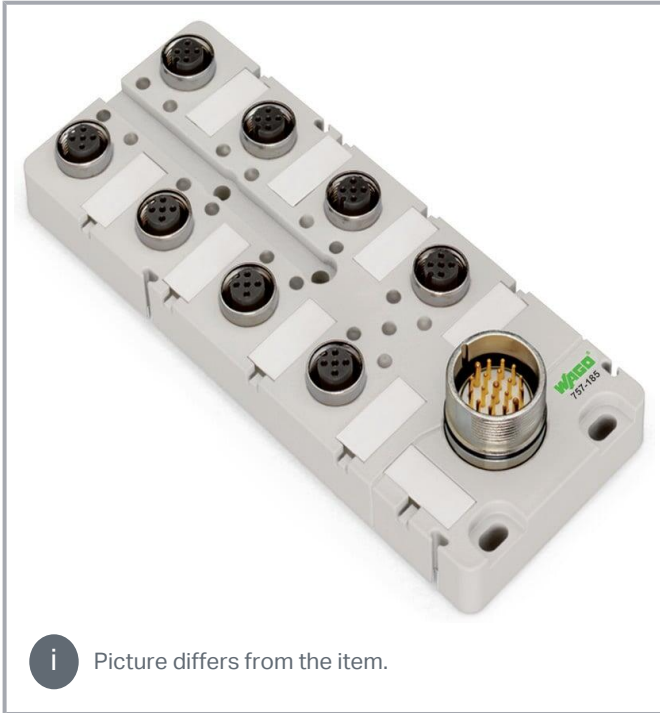

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

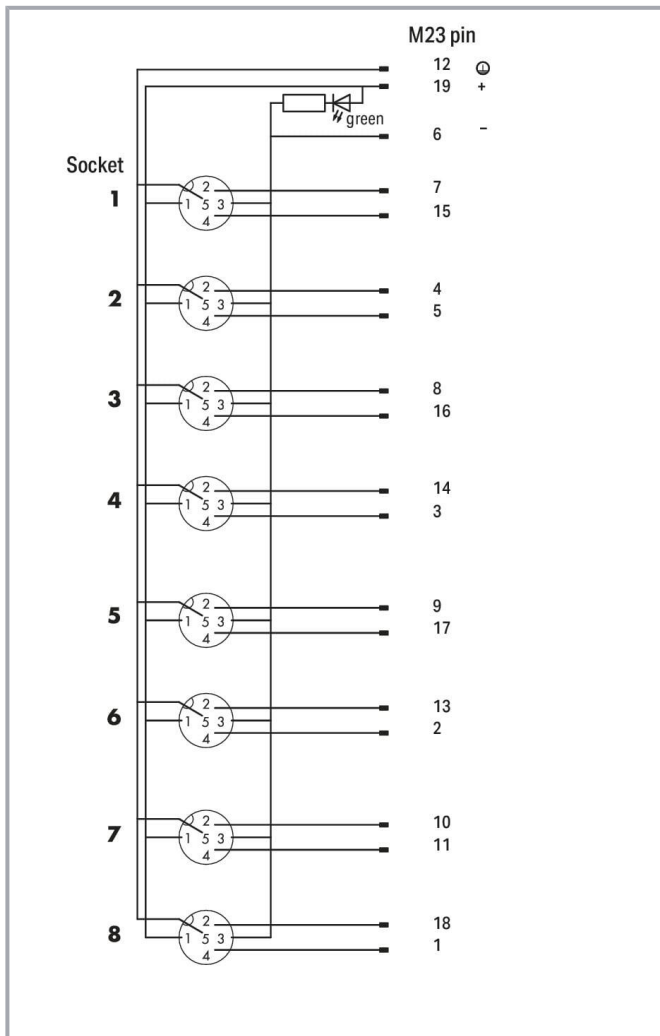

### Item description

- M12 sensor/actuator box, 8-way
- 5-pole (2 signals per contact)
- M23 connector (19-pole)
- Green LED operating indicator
- incl. markers (10 pcs)
- incl. M12 protective caps (2 pcs)

Module ohne Status-LED können auch zur Übertragung analoger Signale verwendet werden!

Subject to changes. Please also observe the further product documentation!



## Data

### Technical data

Contact resistance (max.)	0.01 $\Omega$
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	9 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	1000 M $\Omega$
Signal characteristics	PNP
Indicators	LED (U) green: sensor/actuator box status

### Connection data

Connection technology: inputs/outputs	8 x M12 socket; 5-pole; incl. ground
Connection technology: trunk cable	1 x M23 plug; 19-pole

### Physical data

Width	60 mm / 2.362 inches
Height	34 mm / 1.339 inches
Depth	152 mm / 5.984 inches

### Mechanical Data

Mounting type	Screw mounting
Weight	240 g

### Material Data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 $\mu$ m gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

### Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Protection type	IP67
Note on protection type	per EN 60529 (NEMA 6 & 6P) in fully locked position with its plugs or

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



	protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

### Commercial data

eCl@ss 10.0	27-44-01-11
eCl@ss 9.0	27-44-01-08
ETIM 8.0	EC003558
ETIM 7.0	EC002585
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454515348
Customs tariff number	85366990990

### Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e1a8115a-2fef-472d-b8ec-48dad5345196
SCIP notification number (Belgium)	16abb6ca-d12e-4785-9b31-7245a41bcbd4
SCIP notification number (Bulgaria)	9723ea80-28cb-4522-b26f-597f3fce29cf
SCIP notification number (Czech Republic)	b7431cd9-5238-477d-95c1-a0cdf9a6186d
SCIP notification number (Denmark)	ad166034-b50d-4cbb-a6e3-5d7221a0e161
SCIP notification number (Finland)	3054ffa3-0668-4a9e-ba3f-d5fb13904f10
SCIP notification number (France)	5df970b5-5262-4797-9469-e731e9df874f
SCIP notification number (Germany)	0588f6f6-00a6-4051-b61b-e14010fcedad
SCIP notification number (Hungary)	1aaed8c2-cc53-4490-8d58-966c966f87f6
SCIP notification number (Italy)	ae26842d-c323-4d9e-954b-a4d68cac71fc
SCIP notification number (Netherlands)	9816b749-4696-499f-b8ea-a0abe349df07
SCIP notification number (Poland)	73c88197-2823-40f0-8381-45d754d6e49e
SCIP notification number (Romania)	8e21fd18-3891-4259-a45e-7ccb0ffec3fc
SCIP notification number (Sweden)	06bfb06e-8d75-4dee-a7c0-ea30216c3b91


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

## Optional accessories

### Marking accessories

#### Marking strip



**Item no.: 757-011**

Marker card; not stretchable; snap-on type

[www.wago.com/757-011](http://www.wago.com/757-011)

#### Marking devices



**Item no.: 210-110**

Fiber-tip pen

[www.wago.com/210-110](http://www.wago.com/210-110)

### Mounting

#### Intermediate plate



**Item no.: 757-080**

Spacer module for sensor/actuator box; 8-way

[www.wago.com/757-080](http://www.wago.com/757-080)

### Cover

#### Cover



**Item no.: 756-8102**

M12 protective cap; for unused sockets

[www.wago.com/756-8102](http://www.wago.com/756-8102)

## Downloads

### Documentation

#### Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

### System Description

Sensor/Actuator Boxes – General Product Information	pdf	Download
---	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



438.6 kB

---

## CAD/CAE-Data

### CAD data

2D/3D Models 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
------------------------------	---------------------	--------------------------

### CAE data

EPLAN Data Portal 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
-----------------------------------	---------------------	--------------------------

WSCAD Universe 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
--------------------------------	---------------------	--------------------------

EPLAN Data Portal 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
-----------------------------------	---------------------	--------------------------

WSCAD Universe 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
--------------------------------	---------------------	--------------------------

ZUKEN Portal 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
------------------------------	---------------------	--------------------------

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 757-185/100-000	<a href="#">URL</a>	<a href="#">Download</a>
--	---------------------	--------------------------

M12 sensor/actuator box; 8-way; 5-pole; M23 connector; Without LED

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!