

ECN/PCN No.: M1303

For Manufacturer			
<b>Product Description:</b> <span style="color: blue;">Axial Power Inductor</span>	<b>Abracon Part Number / Part Series:</b> <b>AIAP-03</b>	<input type="checkbox"/> Documentation only <input checked="" type="checkbox"/> ECN <input type="checkbox"/> EOL	<input checked="" type="checkbox"/> Series <input type="checkbox"/> Part Number
<b>Affected Revision:</b> <p style="text-align: center;">G</p>	<b>New Revision:</b> <p style="text-align: center;">H</p>	<b>Application:</b> <input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-Safety	

**Prior to Change:**

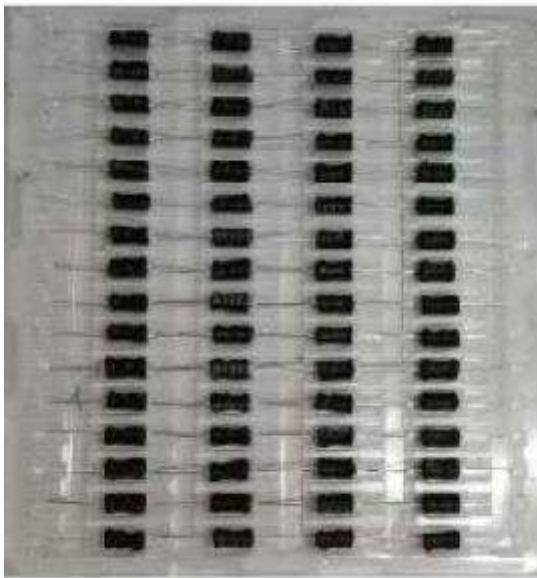
### 1.0 Key Electrical Specifications

Part No.	L(μH)	Tolerance	DCR(Ω)	I <sub>DC</sub> (A)	Inductance Code
		(%)	(max)	(max)	
AIAP-03-3R9	3.9	M	0.007	15.50	3R9M
AIAP-03-4R7	4.7	M	0.008	13.90	4R7 M
AIAP-03-5R6	5.6	M	0.011	12.60	5R6 M
AIAP-03-6R8	6.8	M	0.013	11.60	6R8 M
AIAP-03-8R2	8.2	K	0.017	9.89	8R2K
AIAP-03-100	10	K	0.019	8.70	100K
AIAP-03-120	12	K	0.020	8.21	120K
AIAP-03-150	15	K	0.022	7.34	150K
AIAP-03-180	18	K	0.023	6.64	180K
AIAP-03-220	22	K	0.026	6.07	220K
AIAP-03-270	27	K	0.027	5.36	270K
AIAP-03-330	33	K	0.032	4.83	330K
AIAP-03-390	39	K	0.033	4.36	390K
AIAP-03-470	47	K	0.035	3.98	470K
AIAP-03-560	56	K	0.037	3.66	560K
AIAP-03-680	68	K	0.047	3.31	680K
AIAP-03-820	82	K	0.060	3.10	820K
AIAP-03-101	100	K	0.090	2.79	101K
AIAP-03-121	120	K	0.113	2.54	121K
AIAP-03-151	150	K	0.129	2.22	151K
AIAP-03-181	180	K	0.150	1.98	181K
AIAP-03-221	220	K	0.162	1.89	221K
AIAP-03-271	270	K	0.208	1.63	271K
AIAP-03-331	330	K	0.212	1.51	331K
AIAP-03-391	390	K	0.281	1.39	391K
AIAP-03-471	470	K	0.380	1.24	471K
AIAP-03-561	560	K	0.420	1.17	561K
AIAP-03-681	680	K	0.548	1.050	681K
AIAP-03-821	820	K	0.655	0.970	821K
AIAP-03-102	1000	K	0.844	0.870	102K
AIAP-03-122	1200	K	1.04	0.790	122K
AIAP-03-152	1500	K	1.18	0.700	152K
AIAP-03-182	1800	K	1.56	0.640	182K
AIAP-03-222	2200	K	2.00	0.580	222K
AIAP-03-272	2700	K	2.06	0.530	272K
AIAP-03-332	3300	K	2.63	0.470	332K
AIAP-03-392	3900	K	2.75	0.430	392K
AIAP-03-472	4700	K	3.19	0.390	472K
AIAP-03-562	5600	K	3.92	0.359	562K
AIAP-03-682	6800	K	5.69	0.322	682K
AIAP-03-822	8200	K	6.32	0.293	822K
AIAP-03-103	10000	K	7.30	0.266	103K
AIAP-03-123	12000	K	10.0	0.257	123K
AIAP-03-153	15000	K	11.2	0.230	153K

**2.0 Packing (100pcs/bag)**
**After Change:**
**2.0 Key Electrical Specifications**

Part No.	L( $\mu$ H)	Tolerance	DCR( $\Omega$ )	I <sub>DC</sub> (A)	Inductance Code
		(%)	(max)	(max)	
AIAP-03-3R9	3.9	M	0.007	15.50	3R9M
AIAP-03-4R7	4.7	M	0.008	13.90	4R7 M
AIAP-03-5R6	5.6	M	0.011	12.60	5R6 M
AIAP-03-6R8	6.8	M	0.013	11.60	6R8 M
AIAP-03-8R2	8.2	K	0.017	9.89	8R2K
AIAP-03-100	10	K	0.019	8.70	100K
AIAP-03-120	12	K	0.020	8.21	120K
AIAP-03-150	15	K	0.022	7.34	150K
AIAP-03-180	18	K	0.023	6.64	180K
AIAP-03-220	22	K	0.026	6.07	220K
AIAP-03-270	27	K	0.027	5.36	270K
AIAP-03-330	33	K	0.032	4.83	330K
AIAP-03-390	39	K	0.033	4.36	390K
AIAP-03-470	47	K	0.035	3.98	470K
AIAP-03-560	56	K	0.037	3.66	560K
AIAP-03-680	68	K	0.047	3.31	680K
AIAP-03-820	82	K	0.060	3.10	820K
AIAP-03-101	100	K	0.090	2.79	101K
AIAP-03-121	120	K	0.113	2.54	121K
AIAP-03-151	150	K	0.129	2.22	151K
AIAP-03-181	180	K	0.150	1.98	181K
AIAP-03-221	220	K	0.162	1.89	221K
AIAP-03-271	270	K	0.208	1.63	271K
AIAP-03-331	330	K	0.212	1.51	331K
AIAP-03-391	390	K	0.281	1.39	391K
AIAP-03-471	470	K	0.380	1.24	471K
AIAP-03-561	560	K	0.420	1.17	561K
AIAP-03-681	680	K	0.548	1.050	681K
AIAP-03-821	820	K	0.655	0.970	821K
AIAP-03-102	1000	K	0.844	0.870	102K
AIAP-03-122	1200	K	1.04	0.790	122K
AIAP-03-152	1500	K	1.18	0.700	152K
AIAP-03-182	1800	K	1.56	0.640	182K
AIAP-03-222	2200	K	2.00	0.580	222K
AIAP-03-272	2700	K	2.06	0.530	272K
AIAP-03-332	3300	K	2.63	0.470	332K
AIAP-03-392	3900	K	2.75	0.430	392K
AIAP-03-472	4700	K	3.19	0.390	472K
AIAP-03-562	5600	K	3.92	0.359	562K

AIAP-03-682	6800	K	5.69	0.322	682K
AIAP-03-822	8200	K	6.32	0.293	822K
AIAP-03-103	10000	K	7.30	0.266	103K
AIAP-03-123	12000	K	10.0	0.257	123K
AIAP-03-153	15000	K	11.2	0.230	153K
AIAP-03-183	18000	K	15.2	0.210	183K
AIAP-03-223	22000	K	16.8	0.19	223K
AIAP-03-273	27000	K	18.6	0.171	273K
AIAP-03-333	33000	K	26.7	0.155	333K
AIAP-03-393	39000	K	29.0	0.143	393K
AIAP-03-473	47000	K	31.8	0.131	473K
AIAP-03-563	56000	K	42.6	0.119	563K
AIAP-03-683	68000	K	46.9	0.108	683K
AIAP-03-823	82000	K	64.9	0.099	823K
AIAP-03-104	100000	K	71.1	0.098	104K
AIAP-03-124	120000	K	37.0	0.070	124K

**3.0 Packing (64pcs/Plate)**


<b>Cause/Reason for Change:</b> Update to the packaging information to 64pcs/plat, Introduced the following PNs to the series 183K, 223K, 273K, 333K, 393K, 473K, 563K, 683K, 823K, 104K, 124K		
<b>Change Plan</b>		
<b>Effective Date:</b>	<b>Additional Remarks:</b>	
<b>Change Declaration:</b> The change does not affect fit or function of the devices in the series.		
<b>Issued Date:</b> 9/16/2012	<b>Issued By:</b> Ahmed Alamin	<b>Issued Department:</b> Engineering
<b>Approval:</b> Syed Raza Engineering VP	<b>Approval:</b> Reuben Quintanilla Quality Director	<b>Approval:</b> Ying Huang Purchasing Director
<b>For Abracon EOL only</b>		
<b>Last Time Buy (if applicable):</b>		<b>Alternate Part Number / Part Series:</b>
<b>Additional Approval:</b>	<b>Additional Approval:</b>	<b>Additional Approval:</b>
<b>Customer Approval (If Applicable)</b>		
<b>Qualification Status:</b> <div style="text-align: center;"> <input type="checkbox"/> Approved <input type="checkbox"/> Not accepted         </div> <p><i>Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.</i></p>		
<b>Customer Part Number:</b>		<b>Customer Project:</b>
<b>Company Name:</b>	<b>Company Representative:</b>	<b>Representative Signature:</b>
<b>Customer Remarks:</b>		