

Co-Solvent Low Evaporating Flux Remover 1L

Product Highlights

Powerful Co-Solvent Flux Remover
 Low Evaporating
 Low Surface Tension to Clean Under Small Parts


Environmentally-Friendly
 Low Ozone Depletion, Low Toxicity
 RoHS 3 and REACH compliant

Specifications

Boiling Point:	175-215 °C
Flash Point:	77 °C
Vapor Pressure:	0.1 kPa
Liquid Density:	0.825 g/cm ³ (at 20°C)
Kinematic Viscosity:	1.6 cSt (mm ² /s)
Surface Tension:	14 mN/m
Relative Evaporation Rate (RER):	0.06 nBuAc-1
Dielectric Strength (0.1" gap):	>25 kV
Global Warming Potential:	<25 GWP
Ozone Depletion Potential:	0
Color:	Clear
Miscibility in Water:	Not miscible
Net Weight:	0.825kg
Net Volume:	1L
Packaging:	1L Jug (0.825kg net weight)*

*Packaged and Sold by Weight

Co-solvent De-fluxing Process:

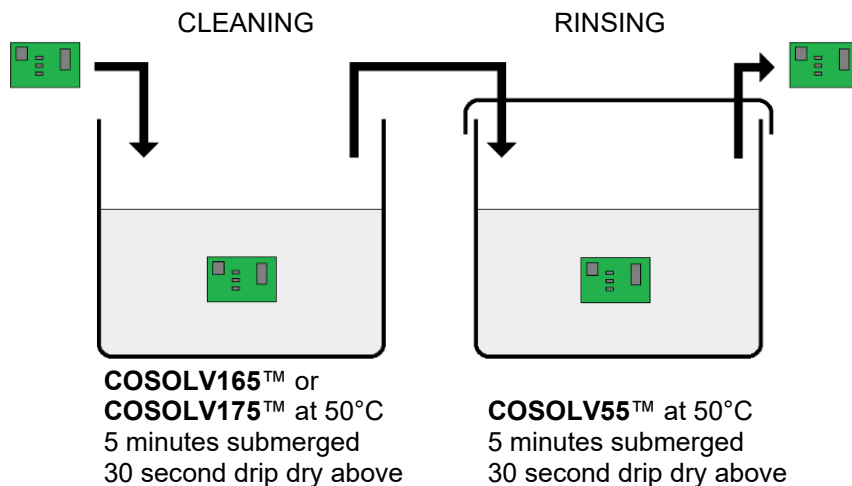

Storage and Handling

Store refrigerated or at room temperature 3-25°C (37-77°F).

Transportation

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.

Conforms to the following Industry Standards:

RoHS 3 Directive (EU) 2015/863:

Yes