
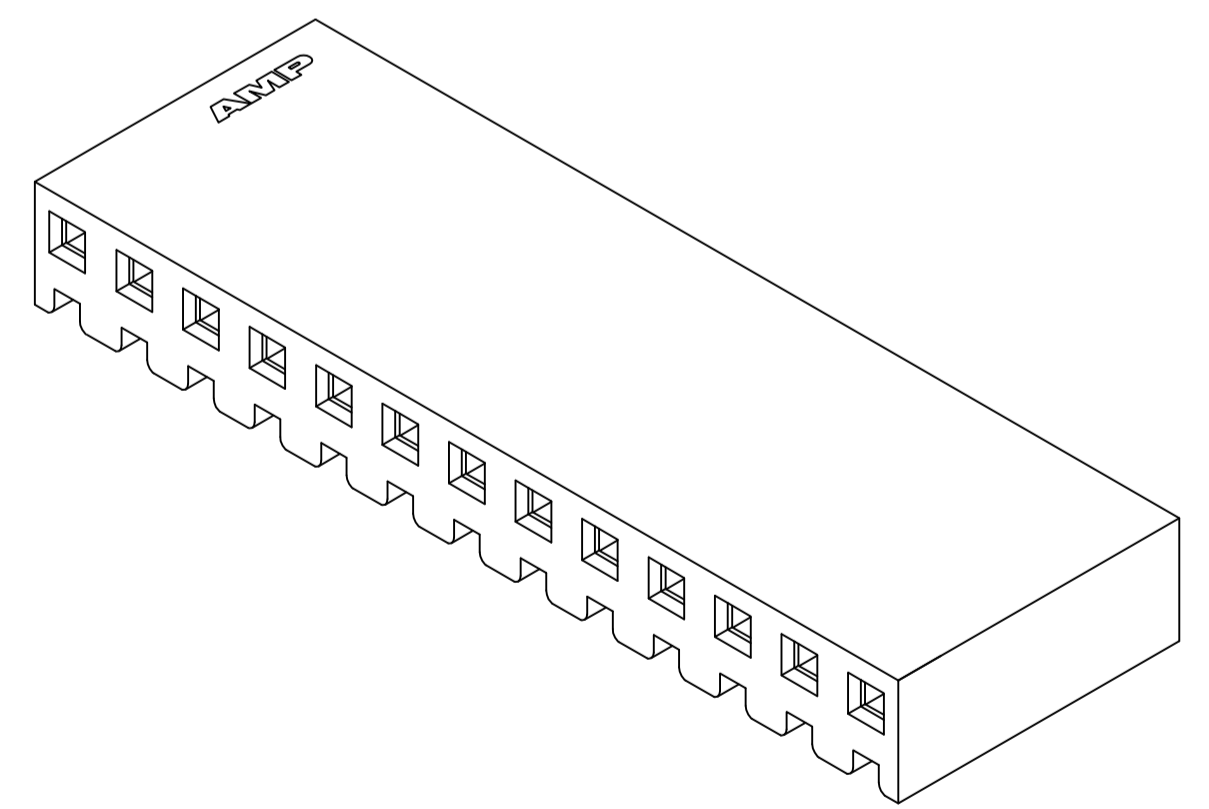
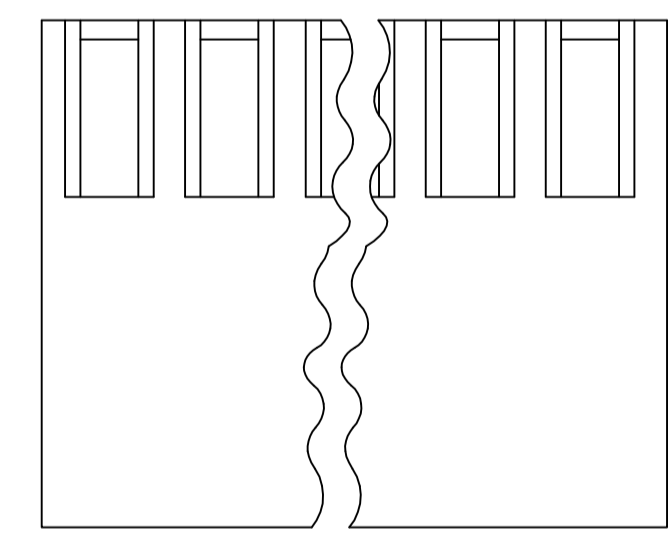
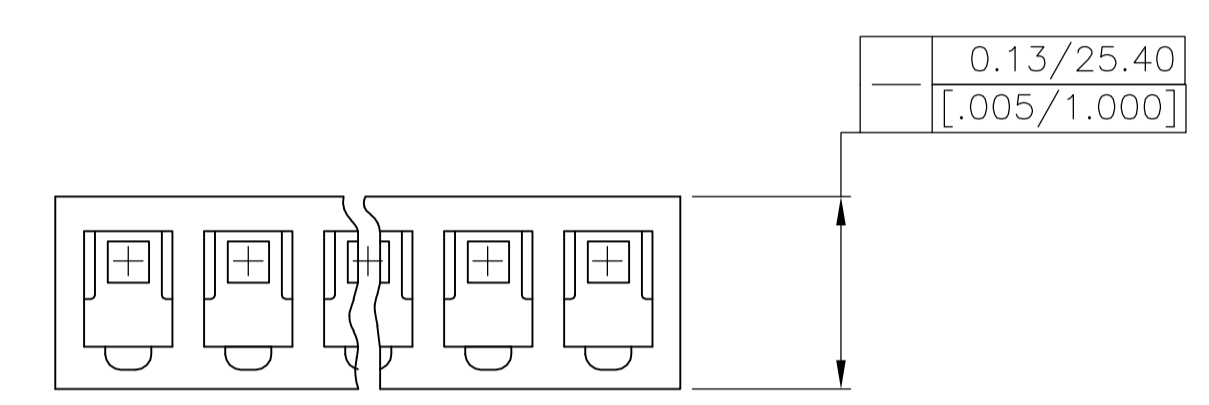
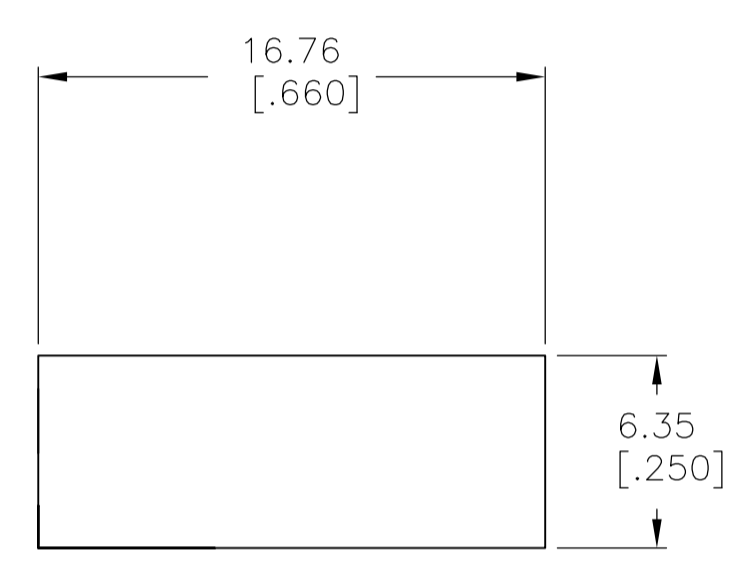


- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 CIRCUIT I.D. NUMBER(S), TO BE LOCATED SEQUENTIALLY AS SHOWN.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 ACCEPTS UP TO .110 INCH INSULATION WIRE.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

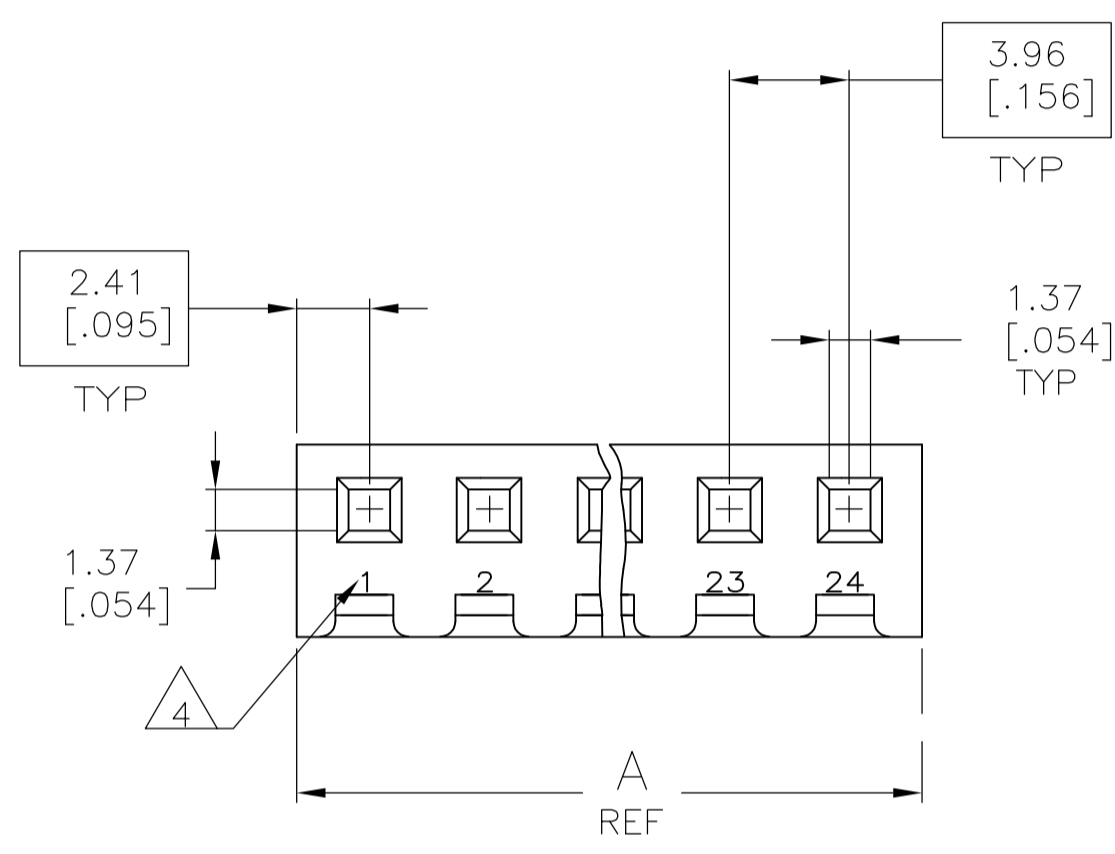

3-DIMENSIONAL MODEL NTS

	DIM A	NO. OF CIRCUITS	PART NO.
7 OBSOLETE	95.96 [3.778]	24	2-647400-4
7 OBSOLETE	92.00 [3.622]	23	2-647400-3
	88.04 [3.466]	22	2-647400-2
7 OBSOLETE	84.07 [3.310]	21	2-647400-1
7 OBSOLETE	80.11 [3.154]	20	2-647400-0
7 OBSOLETE	76.15 [2.998]	19	1-647400-9
7 OBSOLETE	72.19 [2.842]	18	1-647400-8
7 OBSOLETE	68.22 [2.686]	17	1-647400-7
7 OBSOLETE	64.26 [2.530]	16	1-647400-6
7 OBSOLETE	60.30 [2.374]	15	1-647400-5
	56.34 [2.218]	14	1-647400-4
7 OBSOLETE	52.37 [2.062]	13	1-647400-3
7 OBSOLETE	48.41 [1.906]	12	1-647400-2
7 OBSOLETE	44.45 [1.750]	11	1-647400-1
	40.49 [1.594]	10	1-647400-0
7 OBSOLETE	36.53 [1.438]	9	647400-9
7 OBSOLETE	32.56 [1.282]	8	647400-8
7 OBSOLETE	28.60 [1.126]	7	647400-7
7 OBSOLETE	24.64 [.970]	6	647400-6
7 OBSOLETE	20.68 [.814]	5	647400-5
7 OBSOLETE	16.71 [.658]	4	647400-4
7 OBSOLETE	12.75 [.502]	3	647400-3
7 OBSOLETE	8.79 [.346]	2	647400-2
7 OBSOLETE	4.83 [.190]	1	647400-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN L. McEACHIN 28MAR00		TE Connectivity	
DIMENSIONS: mm [INCHES]		CIK: J. ELLIS 28MAR00			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. ELLIS 28MAR00		NAME: HOUSING, SL-156, FOR LARGE WIRE INSULATION	
0 PLC ± -		APPLICATION SPEC		SIZE: A1	
1 PLC ± -		RESTRICTED TO		CAGE CODE: 00779	
2 PLC ± -		WEIGHT: -		DRAWING NO: 647400	
3 PLC ± 0.13 [.005]		CUSTOMER DRAWING		SCALE: 4:1	
4 PLC ± -		SHEET 1 OF 1		REV C	
ANGLES ± 0° 30'					
MATERIAL: NYLON, UL94V-0, NAT					
FINISH: -					