



Views from "X"

6-Pole
(5+1)

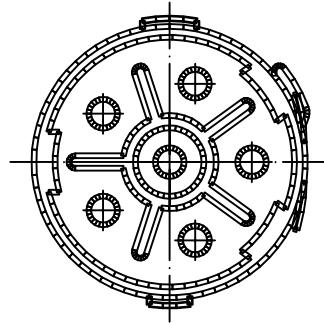


8-Pole

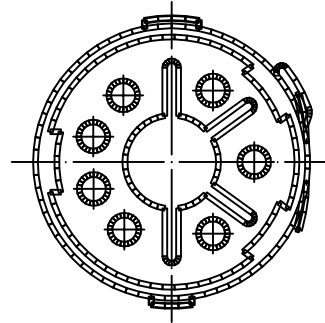


Cable Diameter

7 - 12 mm

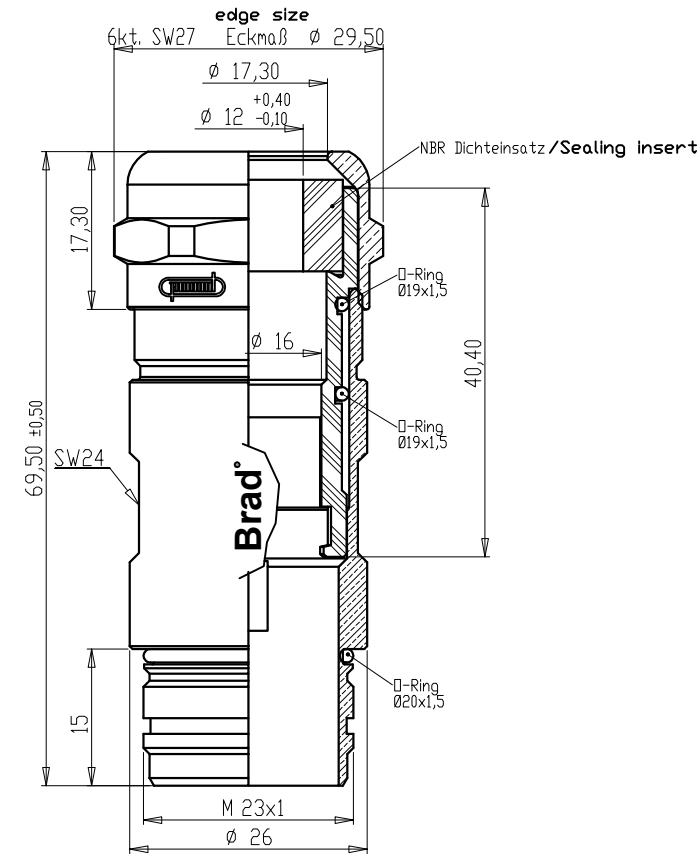

Cable Diameter

11 - 17 mm

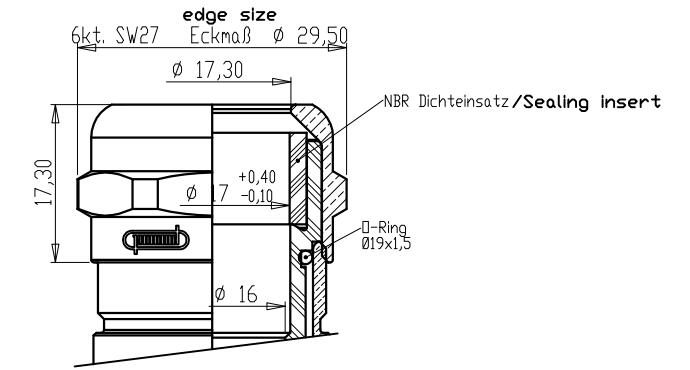

Cable Diameter		Crimp Contacts	Without Contacts
6 Pole (5+PE)	7 - 12mm	KAP6S06-105	KAP6S06-005
		1202330017	1202330019
	11 - 17mm	KAP6S06-109	KAP6S06-009
		1202330018	1202330020
	Crimp range*	0,75-2,5mm ²	
8 Pole	7 - 12mm	KAP8S06-115	KAP8S06-005
		1202330021	1202330023
	11 - 17mm	KAP8S06-119	KAP8S06-009
		1202330022	1202330024
	Crimp range*	0,25-1,0mm ² /0,75-2,5mm ²	

*Crimp range only applies to "Crimp Contacts" version

Notes:

Tolerances (unless specified): DIN ISO 2768 m

DESCRIPTION EC NO.: WEU2009-0135 DRWN: BBRAUCH 2008/11/19 CH'KD: --- APPR: JKOLB 2009/03/02	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM		SCALE ---	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION			
		4 PLACES ±---- ±----	3 PLACES ±---- ±----	2 PLACES ±0.05 ±----	1 PLACE ±0.1 ±----	ANGULAR ± --- °	DRAWN BY BB		DATE 2008/11/19	M23 FIELD-ATTACHABLE CABLE CONNECTOR MALE STRAIGHT	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. see table		DOCUMENT NO. SD-120233-003		SHEET NO. 1 OF 1			
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
		APPROVED BY JKO		DATE 2008/12/09		MOLEX INCORPORATED					