
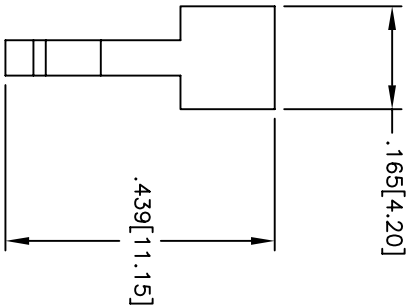


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------------|----------|------|
| - | | RELEASED | 6/3/05 | |
| A | | ADDED ROHS INFO | 01/26/06 | BAS |
| B | | ADDED DIM A TABLE | 03/28/07 | BAS |
| C | | REVISED SHAPE | 4/14/08 | |

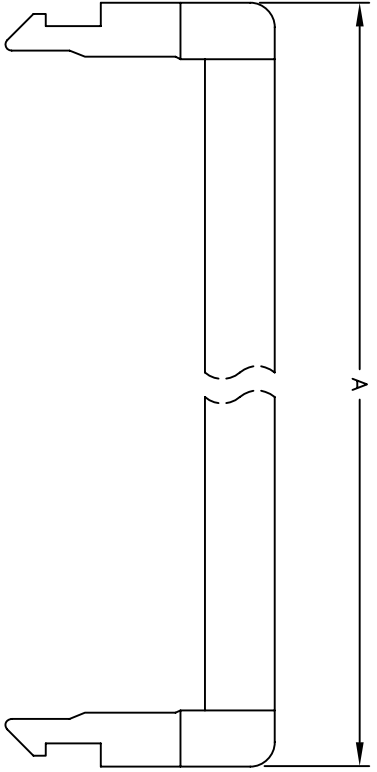

| CONTACTS | A | CONTACTS | A |
|----------|-------|----------|-------|
| 6PIN | 11.20 | 26PIN | 31.20 |
| 8PIN | 13.20 | 28PIN | 33.20 |
| 10PIN | 15.20 | 30PIN | 35.20 |
| 12PIN | 17.20 | 32PIN | 37.20 |
| 14PIN | 19.20 | 34PIN | 39.20 |
| 16PIN | 21.20 | 36PIN | 41.20 |
| 18PIN | 23.20 | 40PIN | 45.20 |
| 20PIN | 25.20 | 44PIN | 49.20 |
| 22PIN | 27.20 | 50PIN | 55.20 |
| 24PIN | 29.20 | 68PIN | 73.20 |

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced,
 rated UL 94V-0
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIN RELIEF FOR 2FCS SERIES

| | | |
|----------|----|--------|
| DRAWN | SS | 6/3/05 |
| CHECKED | | |
| APPROVED | | |

| | | |
|------|------------|--------------|
| SIZE | PART NO. | REV. |
| X | 2FSR-XX | C |
| REF: | SCALE: NTS | SHEET 1 OF 1 |