

NVIDIA GT730 2048MB GDDR5 PCIe® ADD-IN BOARD

Model number: GFX-NG730L16-5C1

MPN: 1A1-E000916ADP



CONTENTS

1.	Feature	3
2.	Functional Overview	4
2.1.	GPU Block diagram	4
2.2.	KEY FEATURES.....	5
2.3.	Memory.....	5
2.4.	Features and Technologies	5
2.5.	Display Support	5
2.6.	Digital Audio	6
2.7.	Video	6
3.	PIN Assignment and Description.....	7
3.1.	DVI-D Connector Pinout	7
3.2.	HDMI Connector Pinout	7
3.3.	VGA Connector Pinout	8
3.4.	VGA Header Pinout.....	8
4.	Power Specifications	9
5.	Thermal Specifications	9
6.	Output configuration and Board Dimension	10
6.1.	Output Configuration	10
6.2.	Board Dimension	10
7.	Thermal Mechanism.....	11


1. Feature

Model Name	GFX-NG730L16-5C1
Graphics Processing Unit	
GPU	GeForce GT730 (GK208)
Process Technology	28 nm
Graphics Engine Operating Frequency (max)	902 MHz
Form Factor	Low profile (145 x 69 mm)
Card Interface	PCI Express® 2.0 (x8) PCI Express x16 Length
CUDA Cores	384 CUDA
Floating Point Performance	692 GFLOPs
DirectX® capability	DirectX® 12 (Feature Level 11.0)
OpenGL	OpenGL™ 4.4
Video Decoder	NVDEC support
Memory	
Memory Clock	2500 MHz/ 5.0 Gbps
DDR Type	GDDR5
Memory Bus	64-bit
Memory Size	2048MB
Display Interface	
Display Output	Dual Link DVI-D, HDMI, VGA
Multi-Display	3
Board spec.	
External Power	No
Power Consumption	32W
Operating Temperature	0°C~50°C
Dimensions	145 x 69mm

2. Functional Overview

2.1. GPU Block diagram

Figure 1.1 shows a simplified block diagram of the GK208 GPUs.

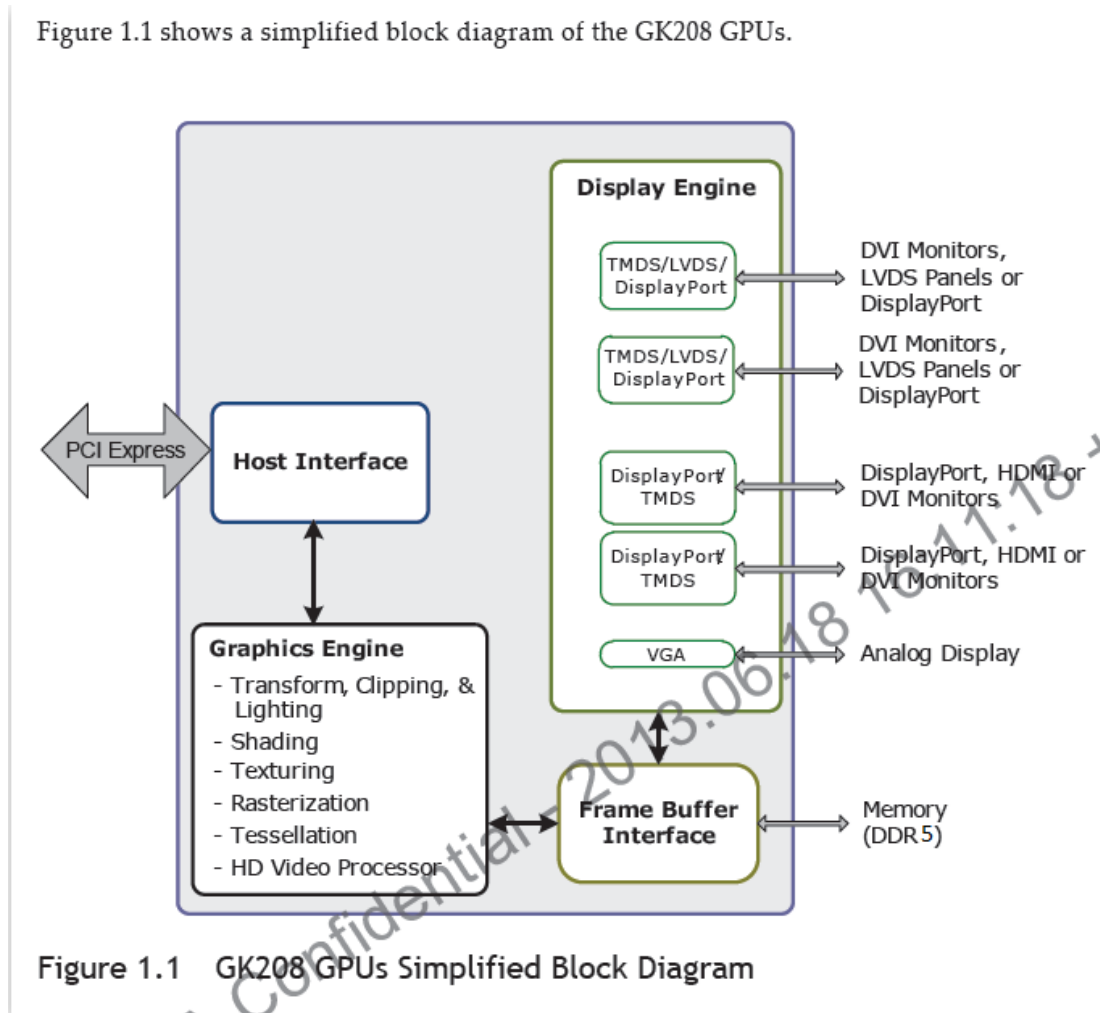

2.2. KEY FEATURES

GPU

- ▶ Core clock: 902 MHz
- ▶ Voltage: 0.9 V – 1.188V \pm 2%
- ▶ Package size: 23mm x 23mm, 595-ball FCBGA

Board

- ▶ 4-layer printed circuit board (PCB)
- ▶ PCI Express 2.0, 8 lanes
- ▶ Physical dimensions: 145 x 69 mm
- ▶ Board power: 25 W

2.3. Memory

- ▶ Memory clock: 2500 MHz
- ▶ Interface: 64 bit
- ▶ Local frame buffer 2 GB (4pieces 128M X 32 GDDR5)

2.4. Features and Technologies

- ▶ DirectX® 12 compliant and Shader Model 5.0
- ▶ OpenGL 4.4
- ▶ NVIDIA® PhysX™ technology
- ▶ NVIDIA® CUDA technology

2.5. Display Support

- ▶ Support Multi Monitor
- ▶ DVI-D: Dual-link resolution 2560 x 1600MHz @60 Hz refresh rate
- ▶ HDMI: Support maximum resolution 4096x2160 (4K)@60Hz refresh rate
- ▶ 400MHz integrated RAMDAC; Maximum VGA Resolution 2048x1536
- ▶ Support HDCP

2.6. Digital Audio

- ▶ Supports for HD Audio over PCI Express
- ▶ Support for secure premium audio (e.g. 7.1 Audio)
- ▶ Data rates up to 192KHz
- ▶ Word sizes of 16-bit, 20bit, and 24-bit

2.7. Video

- ▶ NVIDIA Video Decoder (NVDEC) support

3. PIN Assignment and Description

3.1. DVI-D Connector Pinout

Pin	Signal	Pin	Signal
1	TMDS data 2-	13	TMDS data 3+
2	TMDS data 2+	14	+5VDC power
3	TMDS data 2/4 shield	15	Ground (Return for +5)
4	TMDS data 4-	16	Hot plug detected
5	TMDS data 4+	17	TMDS data 0-
6	DDC clock	18	TMDS data 0+
7	DDC data	19	TMDS data 0/5 shield
8	Analog vertical sync	20	TMDS data 5-
9	TMDS data 1-	21	TMDS data 5+
10	TMDS data 1+	22	TMDS clock shield
11	TMDS data 1/3 shield	23	TMDS clock+
12	TMDS data 3-	24	TMDS clock-
C1	Analog red	C4	Analog horizontal sync
C2	Analog green	C5	Analog ground (RGM return)
C3	Analog blue		

3.2. HDMI Connector Pinout

Pin	Signal	Pin	Signal
1	TMDS Data 2+	11	TMDS Clock Shield
2	TMDS Data 2 Shield	12	TMDS Clock-
3	TMDS Data 2-	13	No Connect
4	TMDS Data 1+	14	No Connect
5	TMDS Data 1 Shield	15	DDC Clock
6	TMDS Data 1-	16	DDC Data
7	TMDS Data 0+	17	Ground
8	TMDS Data 0 Shield	18	+5V Power
9	TMDS Data 0-	19	Hot Plug Detect

10	TMDS Clock+		
----	-------------	--	--

3.3. VGA Connector Pinout

Pin	Signal	Description
1	Red	Red
2	Green	Green
3	Blue	Blue
4	Reserved	Macintosh sense , RW
5	Ground	DDC return
6		Red ground
7		Green ground
8		Blue ground
9	+5V	DDC power
10	SGND	Sync ground
11	ID0	Monitor ID bit 0 (Opt)
12	SDA	Serial data (DDC2B)
13	HSYNC	Horizontal sync
14	VSYNC	Vertical sync
15	SCL	Serial clock (DDC2B)

3.4. VGA Header Pinout

Pin	Signal	Description
1	SCL	Serial clock (DDC2B)
2	SDA	Serial data (DDC2B)
3	+5V	DDC power
4	VSYNC	Vertical sync
5	HSYNC	Horizontal sync
6	GND	Ground
7	Red	Red
8	GND	Ground
9	Green	Green
10	GND	Ground
11	Blue	Blue

12	GND	Ground
----	-----	--------

4. Power Specifications

Parameter	Value	Unit
Input Board Power (Estimated)		
PCI Express edge connector (12V) (estimated input power)	2.58	A
	29.67	W
PCI Express edge connector (3V3) (estimated input power)	0.75	A
	2.43	W
Total estimated input graphics power (estimated TGP)	32.27	W

5. Thermal Specifications

Parameter	Value	Unit
Fan inlet temperature (max.)	55	°C
GPU slowdown temperature (max.Tj)	98	°C
GPU shutdown temperature (max.)	101	°C
GPU junction temperature (estimated)	82	°C


6. Output configuration and Board Dimension

6.1. Output Configuration




6.2. Board Dimension



(Unit : mm)

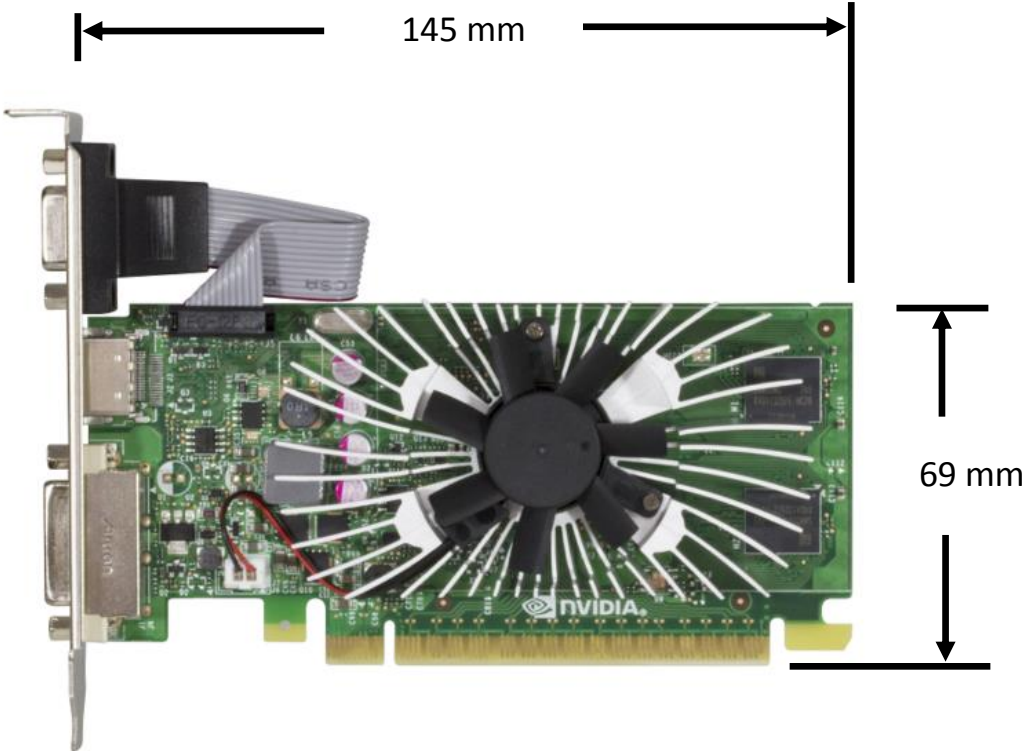



7. Thermal Mechanism

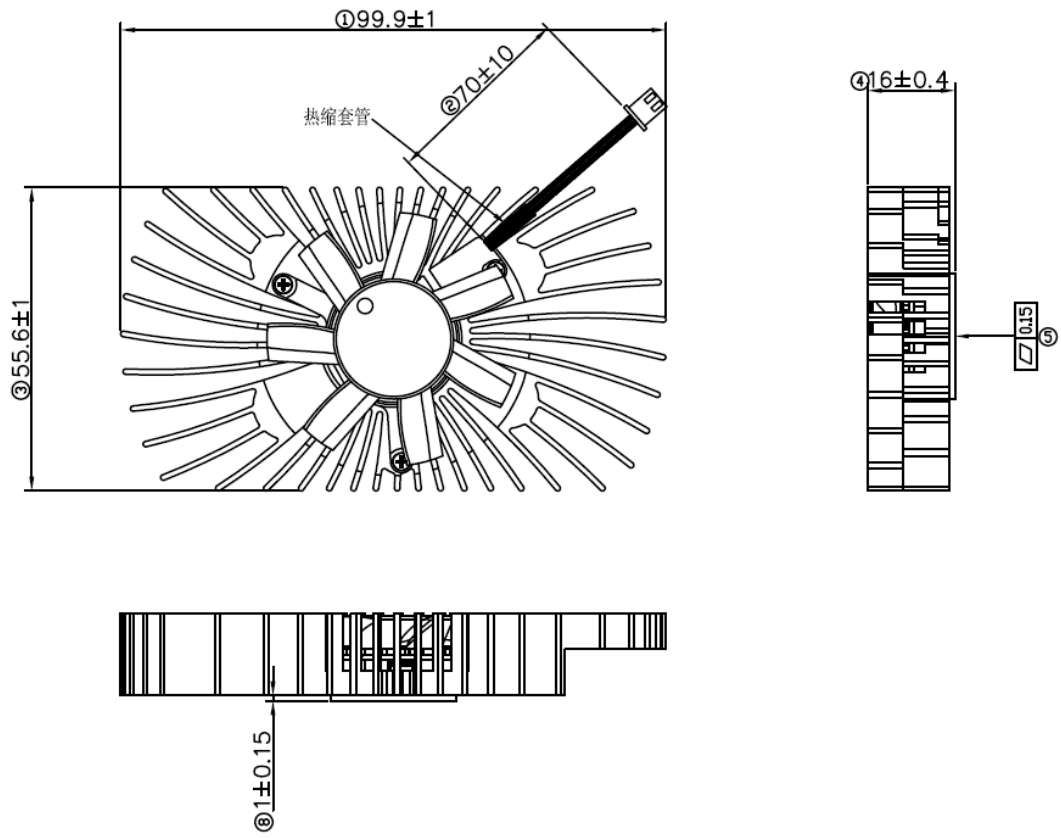

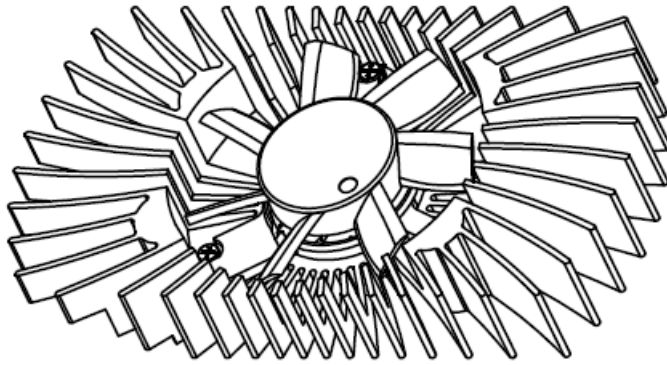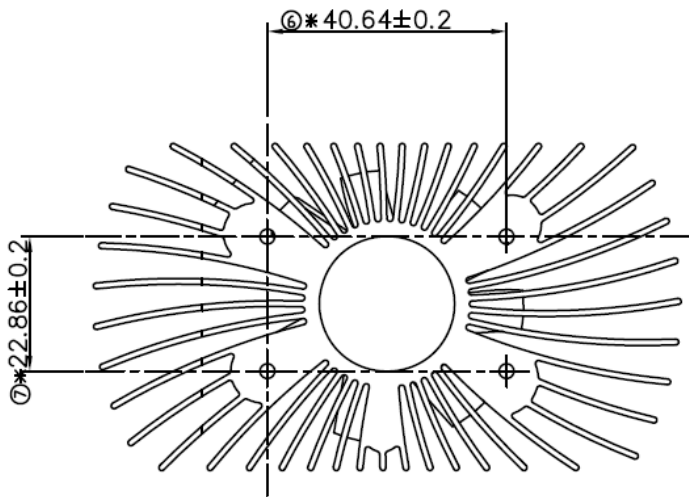

Change log or update history

Rev.	Data	History
1.0	2018/04/13	7302048Q5S64LAU datasheet