

■ **Features**

- Single output to 36W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Overload protection
- Efficiency level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 76x50x32.5mm (exclude plug)



*Product images are for illustrative purposes only and may vary from actual design.

■ **Application**


- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ **Model List**

Custom Designs Available!

Model	Output Voltage	Output Current	Power	Certifications
WM036S-090-X-XX	9V	4A	36W	UL, CE
WM036S-120-X-XX	12V	3A	36W	UL, CE
WM036S-150-X-XX	15V	2.4A	36W	UL, CE
WM036S-180-X-XX	18V	2A	36W	UL, CE
WM036S-240-X-XX	24V	1.5A	36W	UL, CE

■ **Mechanical Diagram**

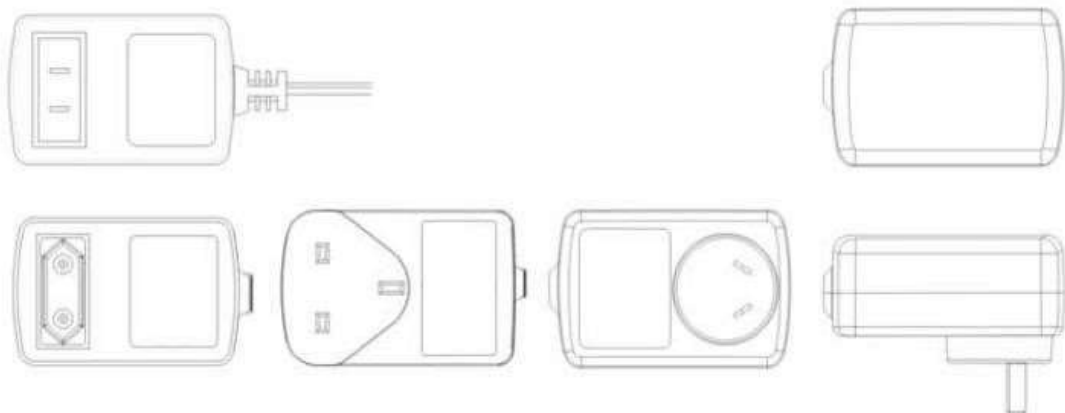

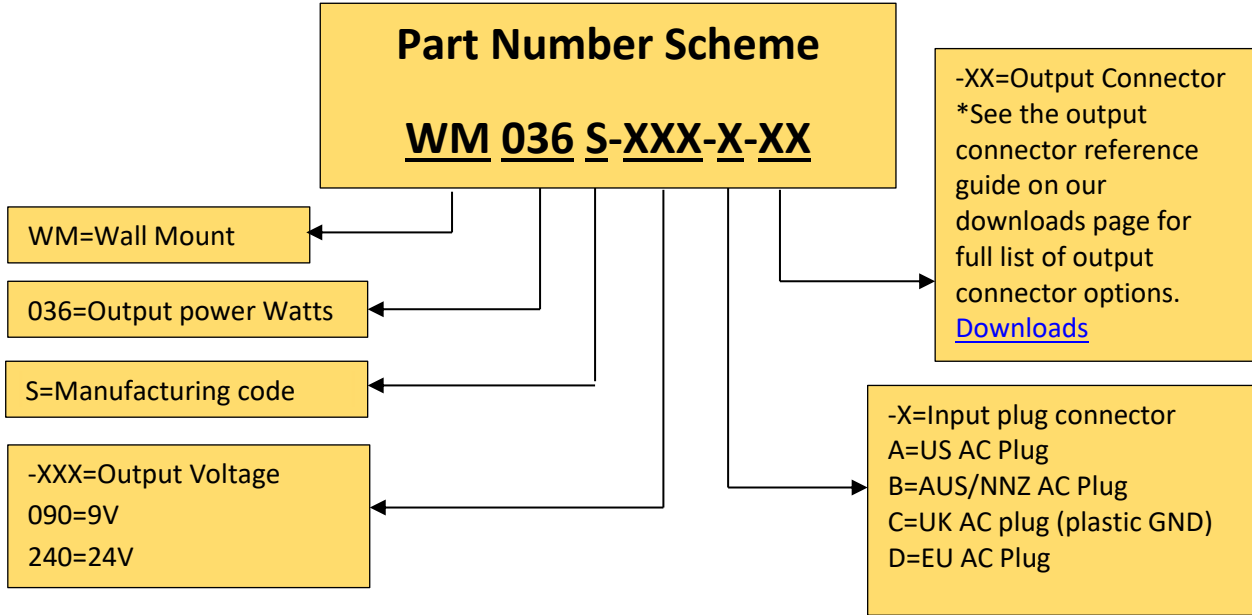

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**