



LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered without Souriau contacts
- Temperature Range : -65°C to +200°C
- Salt Spray : 2000 hours
- Mass : 23 g ± 10%

| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 32.5 Max |
| Z'                  | 31.5 Max |
| VV THREAD           | M22x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

|         |                             |
|---------|-----------------------------|
| Country | Jurisdiction & Control List |
| FR      | Not Listed                  |

**PN: 8D515M15SNL**


|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 19-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |

|              |                                 |  |  |
|--------------|---------------------------------|--|--|
| <b>TITLE</b> | <b>Composite Plug 8D series</b> |  |  |
|--------------|---------------------------------|--|--|

|       |  |                                |                 |
|-------|--|--------------------------------|-----------------|
| SCALE |  | General linear Tolerances: ±-- | NPRDS / PROJECT |
| NA    |  |                                | <b>859</b>      |

|                |                        |  |
|----------------|------------------------|--|
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b> | This document is the property of SOURIAU<br>it must not be reproduced or communicated without permission |
|----------------|------------------------|--|

|           |                                     |            |
|-----------|-------------------------------------|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D515M15SNL-C</b> | SHEET      |
| <b>A3</b> |                                     | <b>1/2</b> |

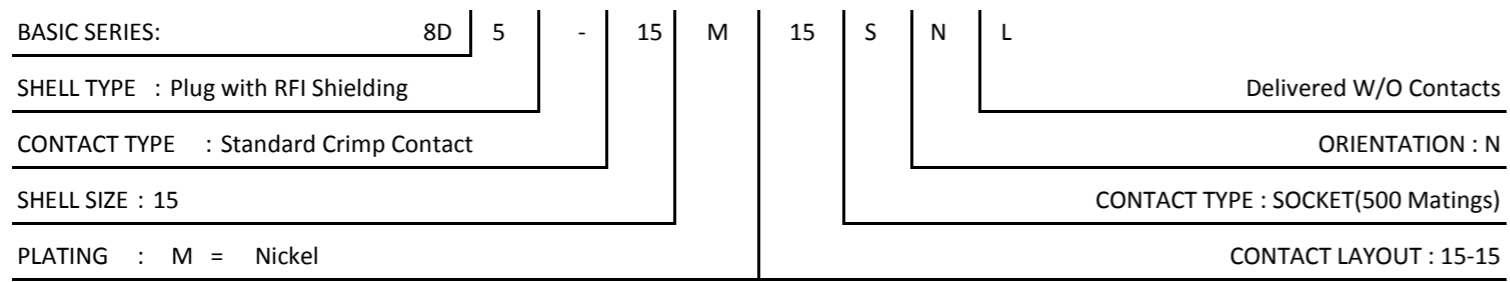

Delivered W/O Contacts

ORIENTATION : N

CONTACT TYPE : SOCKET(500 Matings)

CONTACT LAYOUT : 15-15

4  
3  
2  
1

Contact Layout



| Contacts<br>(Insert arrangement 15-15) |             |             |                     |             |             |
|--|-------------|-------------|---------------------|-------------|-------------|
| Contact position ID                    | Location    |             | Contact position ID | Location    |             |
|  | X-axis (mm) | Y-axis (mm) |                     | X-axis (mm) | Y-axis (mm) |
| A                                      | +100 (2.54) | +225 (5.72) | J                   | -244 (6.20) | +014 (0.36) |
| B                                      | +202 (5.13) | +140 (3.56) | K                   | -202 (5.13) | +140 (3.56) |
| C                                      | +244 (6.20) | +014 (0.36) | L                   | -100 (2.54) | +225 (5.72) |
| D                                      | +218 (5.54) | -113 (2.87) | M                   | +000 (0.00) | +140 (3.56) |
| E                                      | +126 (3.20) | -209 (5.31) | N                   | +110 (2.79) | +040 (1.02) |
| F                                      | +000 (0.00) | -245 (6.22) | P                   | +000 (0.00) | -077 (1.96) |
| G                                      | -126 (3.20) | -209 (5.31) | R                   | -110 (2.79) | +040 (1.02) |
| H                                      | -218 (5.54) | -113 (2.87) | ---                 | ---         | ---         |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 15         | -15             | 14                 | 16            | I              | P<br>All other   | MS20052-15 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D515M15SNL

|                |                                     |                            |   |
|----------------|-------------------------------------|----------------------------|---|
| A              | 19-10-2016                          | First Release              |   |
| ISS            | DATE                                | Latest modification - by   | MOD N°  |
| Designed By:   |                                     | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>     |                            |   |
| SCALE          |                                     | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                     | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>              |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D515M15SNL-C</b> |                            | SHEET<br>2/2  |

H G F E D C B A