

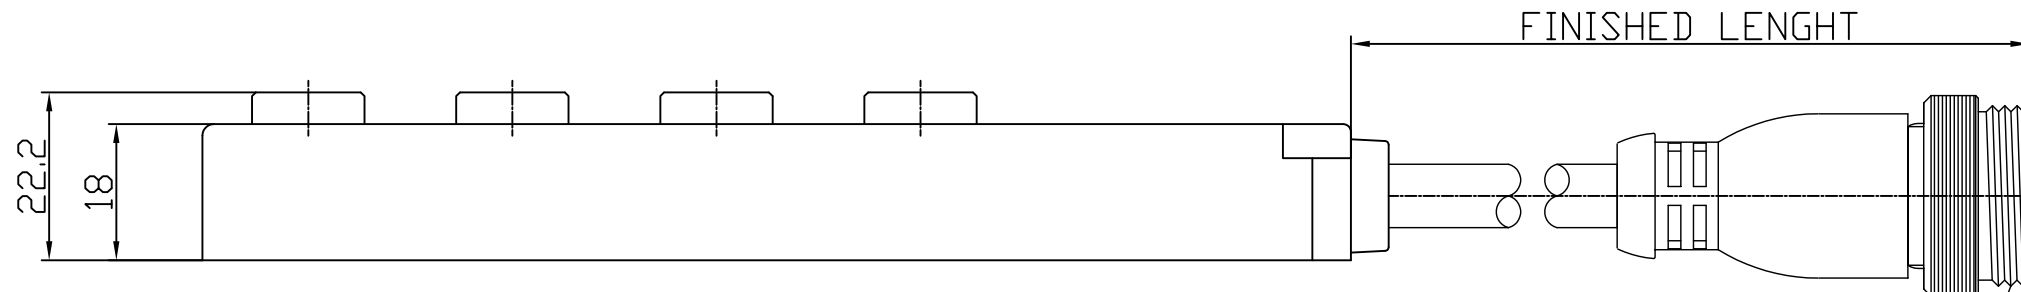


NOTE  
FACE VIEW  
ON CONNECTOR



1-1/8"-16UN-2A  
THREAD MALE

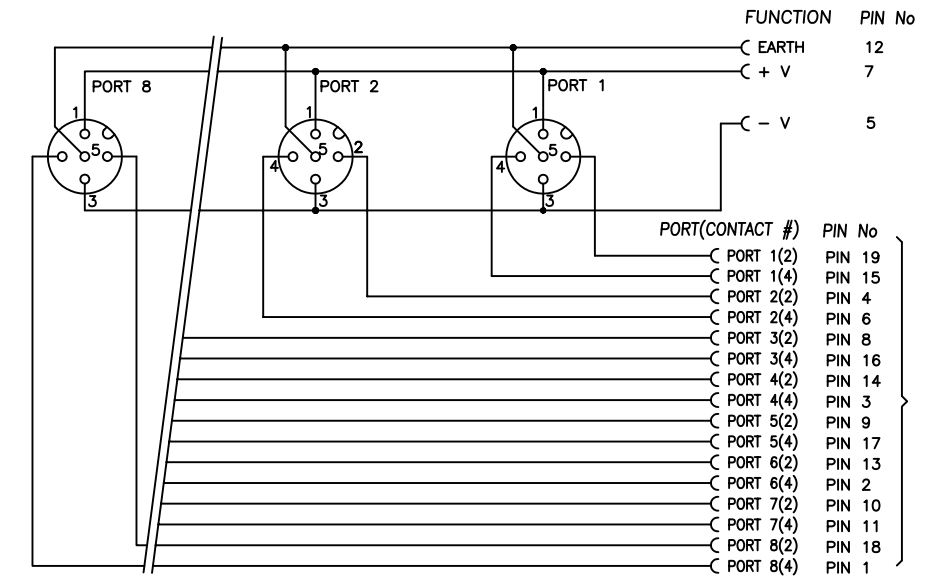

**SPECIFICATION**  
**MATERIALS:**  
 HOUSING & INSERT: PBT YELLOW  
 COUPLING: BRASS-NICKEL PLATED  
 O-RING: VITON  
**ELECTRICAL:**  
 VOLTAGE: 10-30VDC  
 CURRENT RATING: 4A PER PORT, 12 AMPS MAX.  
 PROTECTION CLASS: IP67  
 OPERATING TEMPERATURE: -5°C to +70°C

**NOTES:**  
 FIXING HOLES TO SUIT M4 SCREWS

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201140217	BTY8120-FBE-003	0.3M ± 25MM	PVC

DESCRIPTION EC NO: WEU2010-0450 DRWN: REISSNER 2010/03/22 CHKD: FP APPR: NSTAUDIG 2010/03/23	QUALITY SYMBOLS ▽ = 0 ∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	MM ONLY	1:1	METRIC	
1	REV	4 PLACES	±---	±---	DRAWN BY REISSNER	DATE 2010/03/22	MICRO-CHANGE MPIS 8 PORT TOP MOUNT 19POLE MINI-CHANGE
		3 PLACES	±---	±---	CHECKED BY NS	DATE 2010/03/22	
1	REV	2 PLACES	±---	±---	APPROVED BY NSTAUDIG	DATE 2010/03/23	MOLEX INCORPORATED
		1 PLACE	±0.3	±---	MATERIAL NO.	DOCUMENT NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-120114-083		SHEET NO. 1 OF 1	
SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					