

Data sheet | Item number: 787-2802


DC/DC Converter; 24 VDC input voltage; 10 VDC output voltage; 0.5 A output current; DC OK contact



[www.wago.com/787-2802](http://www.wago.com/787-2802)



DC O.K.	1		5	n.c.
GND	2		6	n.c.
Vout+	3	OUT	7	Vin+
GND	4	IN	8	GND

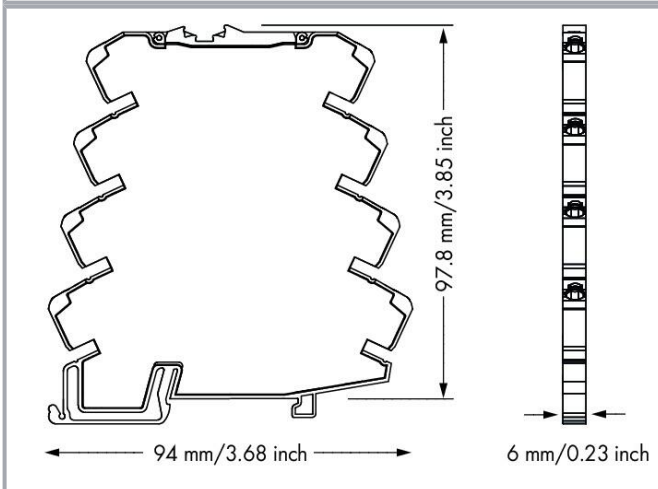

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Item description

### Features:

- DC/DC converter in a compact 6 mm housing
- DC/DC converters (787-28xx) supply devices with 5, 10, 12 or 24 VDC from a 24 or 48 VDC power supply with an output power up to 12 W.
- Output voltage monitoring via DC OK signal output
- Can be commoned with 857 and 2857 Series devices
- Comprehensive range of approvals for multiple applications

## Data

### Technical data

#### Input

Nominal input voltage $U_{i\text{nom}}$	DC 24 V
Input voltage range	DC 15 ... 30 V
Nominal mains frequency range	0 Hz
Input current $I_i$	$\leq 0.42$ A
Inrush current	$\leq 0.5$ A (at nominal input voltage)

#### Output

Nominal output voltage $U_{o\text{nom}}$	DC 10 V
Output voltage range	$\pm 2$ %
Nominal output current $I_{o\text{nom}}$	0.5 A
Nominal output power	5 W
Residual ripple	$\leq 20$ mV (peak-to-peak)

### Signaling and Communication

Signaling	1 x LED DC OK (green) 1 x Short circuit LED (red) 1 x Active signal output ( $U_i$ , max. 4 mA)
Operation status indicator	Green LED ( $U_o$ ) Red LED (short circuit)

### Efficiency/power losses

Power loss $P_l$	$\leq 0.19$ W; $\leq 0.7$ W (nominal load)
------------------	--

Subject to changes. Please also observe the further product documentation!



Efficiency (typ.)	89 % (at nominal input voltage and nominal output)
-------------------	--

### Circuit protection

Internal fuse	No
---------------	----

### Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	yes
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	No
MTBF	> 1,800,000 h

### Connection data

Number of jumper slots	8
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

### Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

### Material Data

Fire load	0.418 MJ
Weight	36 g

Subject to changes. Please also observe the further product documentation!



## Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	95% (no condensation permissible)
Derating	No derating

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 UL 61010-2-201

## Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	DE
GTIN	4055143407069
Customs tariff number	85044083900

## Environmental Product Compliance



CAS-No.	11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	ce67853b-a327-4435-a15f-7e8b7a05bb28

Subject to changes. Please also observe the further product documentation!


SCIP notification number (Belgium)	a9ff99c9-4cac-4c9e-8c81-72a559df0d04
SCIP notification number (Bulgaria)	59d08204-c196-4538-9f66-1cb39f7bf0af
SCIP notification number (Czech Republic)	c0ec1c24-458c-411d-9012-061a533895da
SCIP notification number (Denmark)	b3d92ca7-f3c3-4f6c-8f21-dffe66b83525
SCIP notification number (Finland)	5e6ad7e9-0942-41c6-a9da-28b3343fbd4d
SCIP notification number (France)	bd6ecca3-a963-42c4-a754-c50c5b7e8be1
SCIP notification number (Germany)	c833769c-3814-44b5-a25d-dd261db33b06
SCIP notification number (Hungary)	83c5c8b3-ee6d-428f-9400-ca8b4666edee
SCIP notification number (Italy)	04280762-95a2-445c-9ac2-04755249d69d
SCIP notification number (Netherlands)	5102834b-552d-477c-ac82-90842191f952
SCIP notification number (Poland)	94ae0f57-3e3b-4a18-9eb8-069b2c40bd1b
SCIP notification number (Romania)	9b9145ff-794b-4db7-8977-6b29fee4ead2
SCIP notification number (Sweden)	12bb7370-a057-4c20-bb29-d2901042f6ca

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199 Vol3 Sec1

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

## Optional accessories

### Tool

Operating tool
----------------

Subject to changes. Please also observe the further product documentation!



**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

## Marking accessories

### Marking strip



**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)

### Marker



**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)



**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)



**Item no.: 793-502**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-502](http://www.wago.com/793-502)



**Item no.: 793-503**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-503](http://www.wago.com/793-503)



**Item no.: 793-504**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-504](http://www.wago.com/793-504)



**Item no.: 793-505**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-505](http://www.wago.com/793-505)



**Item no.: 793-506**

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-506](http://www.wago.com/793-506)



**Item no.: 793-566**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-566](http://www.wago.com/793-566)



**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)

## Downloads

### Documentation

#### Bid Text

787-2802

2019 Feb 19

xml

Download

X81 - Datei

5.8 kB

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



787-2802 pdf - Datei	2016 Jan 11	pdf 91.9 kB	Download
787-2802 docx - Datei	2016 Jan 11	docx 20.4 kB	Download
787-2802 doc - Datei	2016 Jan 11	doc 35.3 kB	Download
<b>Instruction Leaflet</b>			
DC/DC-Wandler	V 1.1.1 2020 Mar 31	pdf 2.4 MB	Download
<b>Additional Information</b>			
Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download

## CAD/CAE-Data

### CAD data

2D/3D Models 787-2802	URL	Download
-----------------------	-----	----------

### CAE data

EPLAN Data Portal 787-2802	URL	Download
----------------------------	-----	----------

ZUKEN Portal 787-2802	URL	Download
-----------------------	-----	----------

WSCAD Universe 787-2802	URL	Download
-------------------------	-----	----------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 787-2802 DC/DC Converter; 24 VDC input voltage; 10 VDC output voltage; 0.5 A output current; DC OK contact	URL	Download
---	-----	----------

Subject to changes. Please also observe the further product documentation!



## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.