

## STRADA-2X2-VSM

IESNA Type V (square) beam for wide areas lighting such as car parks

### SPECIFICATION:

Dimensions	50.0 x 50.0 mm
Height	6.1 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish
STRADA-2X2-VSM	Multi-lens	PMMA	clear	





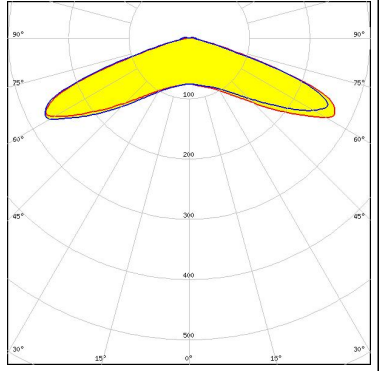

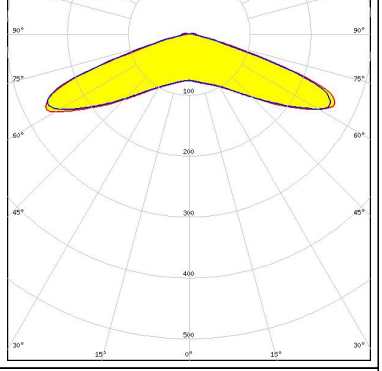

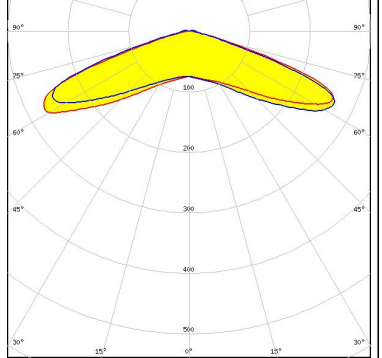
### ORDERING INFORMATION:

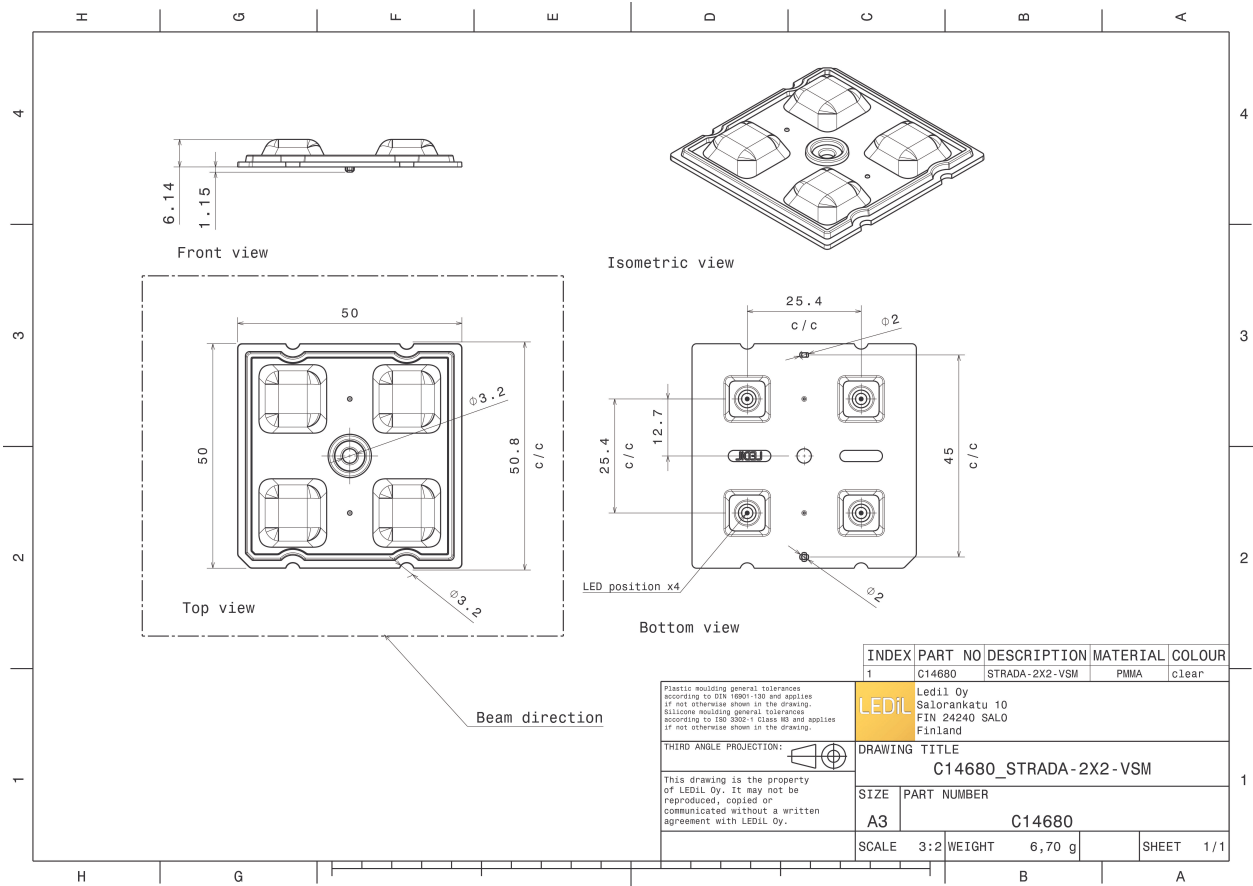Component	Qty in box	MOQ	MPQ	Box weight (kg)
C14680_STRADA-2X2-VSM » Box size: 480 x 280 x 300 mm	800	160	160	6.2



See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### OPTICAL RESULTS (MEASURED):
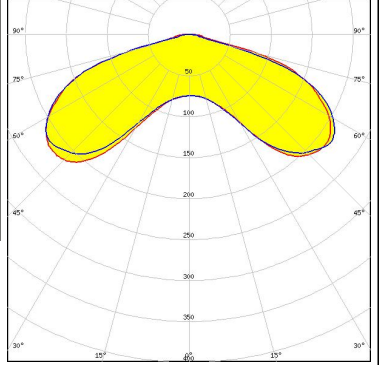
<p> <b>LED</b> Bridgelux SMD 5050</p> <p><b>FWHM / FWTM</b> 149.0° / 158.0°</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.3 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>		
<p> <b>LED</b> QUICK FLUX XTP 2x4 xxx LS G5</p> <p><b>FWHM / FWTM</b> Asymmetric</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.5 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>		
<p> <b>LED</b> QUICK FLUX XTP 2x6 xxx LS G5</p> <p><b>FWHM / FWTM</b> Asymmetric</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.5 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>		
<p> <b>LED</b> QUICK FLUX XTP 2x8 xxx LS G5</p> <p><b>FWHM / FWTM</b> Asymmetric</p> <p><b>Efficiency</b> 94 %</p> <p><b>Peak intensity</b> 0.5 cd/lm</p> <p><b>LEDs/each optic</b> 1</p> <p><b>Light colour</b> White</p> <p><b>Required components:</b></p>		


#### OPTICAL RESULTS (MEASURED):




LED XD16  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

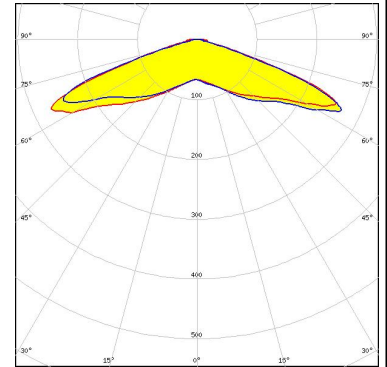


LED XD16  
 FWHM / FWTM 149.0° / 159.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

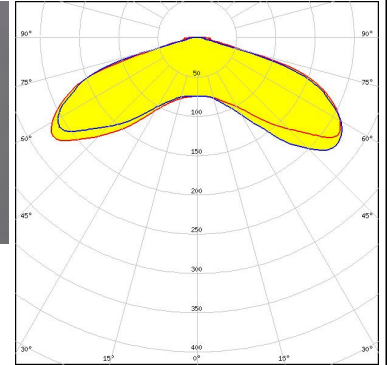

LED XHP35 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

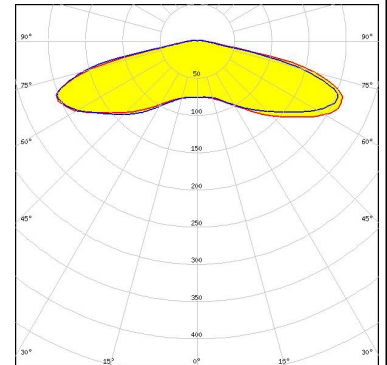

LED XP-G2  
 FWHM / FWTM 151.0° / 161.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

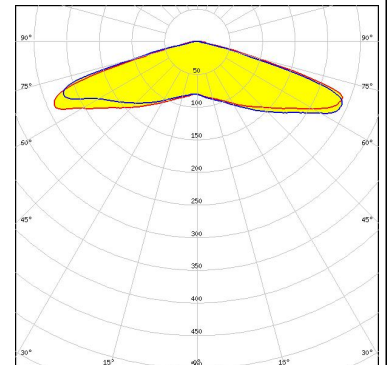



#### OPTICAL RESULTS (MEASURED):

##### CREE LED

LED XP-G2 HE  
 FWHM / FWTM 152.0° / 160.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


##### CREE LED

LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

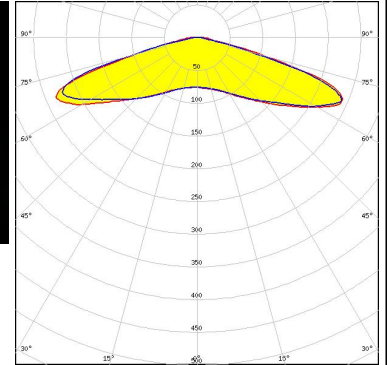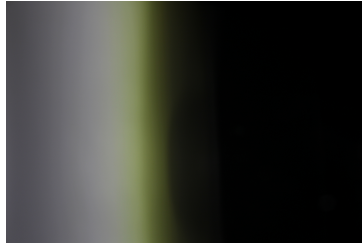


##### CREE LED

LED XT-E  
 FWHM / FWTM 152.0° / 170.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

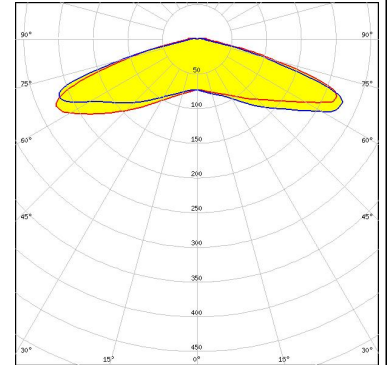

##### LUMILEDS


LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

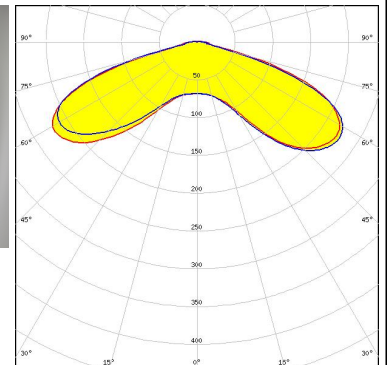

#### OPTICAL RESULTS (MEASURED):


##### LUMILEDS

LED LUXEON C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/m  
 LEDs/each optic 1  
 Light colour PC Amber  
 Required components:

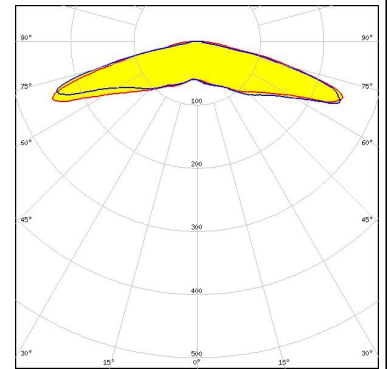


##### LUMILEDS

LED LUXEON V  
 FWHM / FWTM 151.0° / 167.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

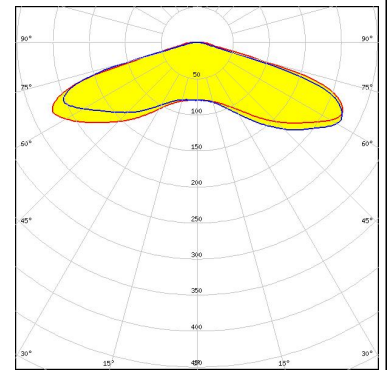


##### LUMILEDS

LED LUXEON V2  
 FWHM / FWTM 147.0° / 158.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/m  
 LEDs/each optic 1  
 Light colour White  
 Required components:

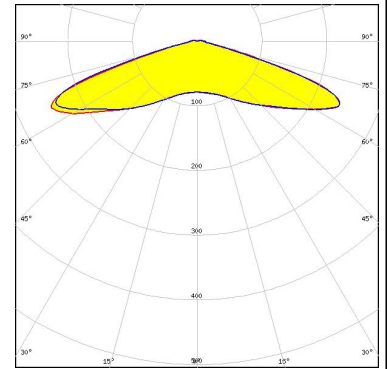

##### LUMINUS


LED SST-10-B130  
 FWHM / FWTM 144.0° / 157.0°  
 Efficiency 97 %  
 Peak intensity 0.6 cd/m  
 LEDs/each optic 1  
 Light colour Deep Red  
 Required components:

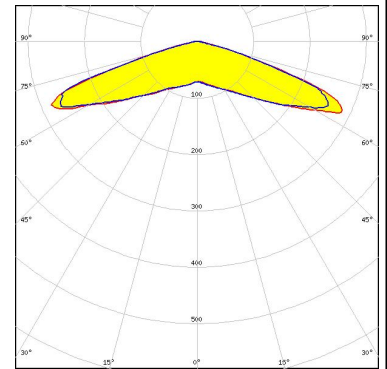

#### OPTICAL RESULTS (MEASURED):


**MST** | Your solutions

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
 FWHM / FWTM Asymmetric  
 Efficiency 98 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

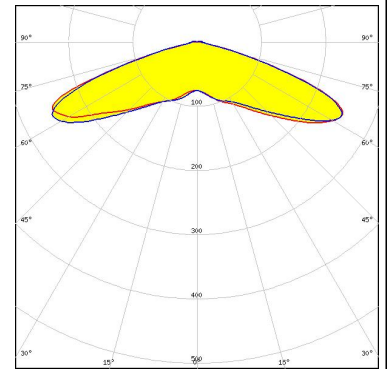


**NICHIA**

LED NVSW219D  
 FWHM / FWTM 152.0° / 163.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

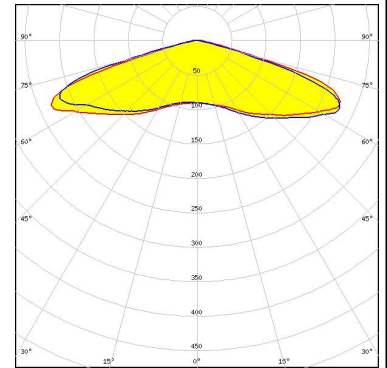


**NICHIA**

LED NVSW219F  
 FWHM / FWTM 151.0° / 160.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

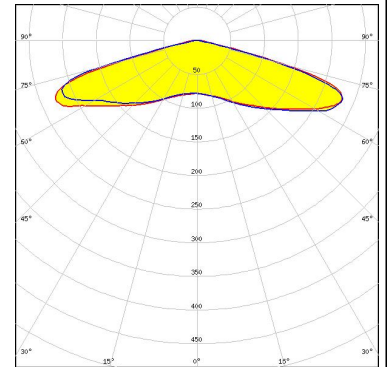
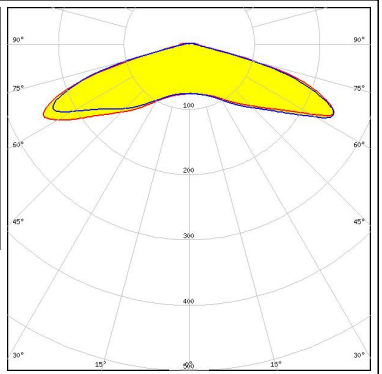

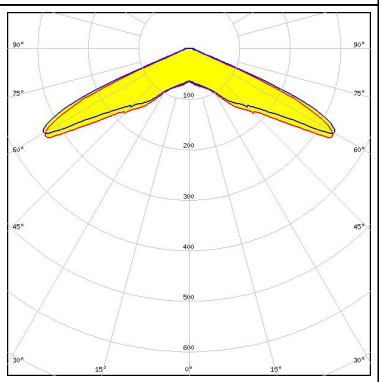

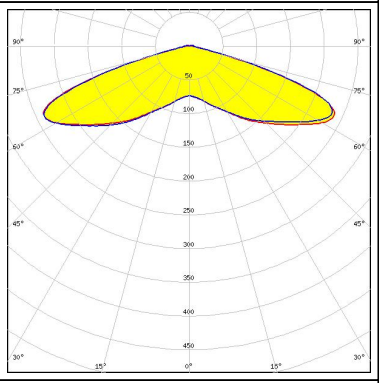

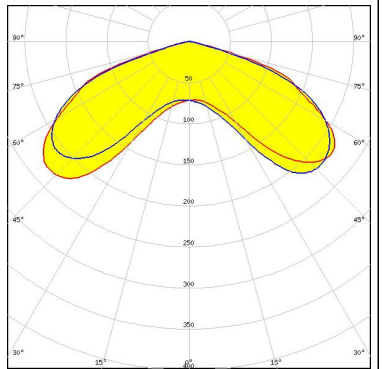


**NICHIA**

LED NVSW319B  
 FWHM / FWTM 156.0° / 164.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

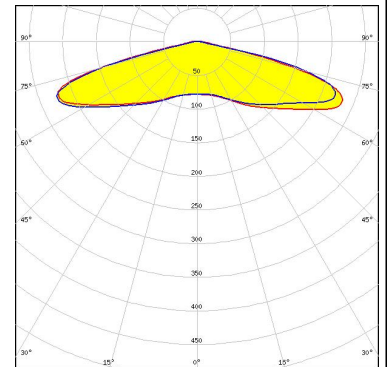

#### OPTICAL RESULTS (MEASURED):

<p><b>NICHIA</b></p> <p>LED NVSW3x9A            FWHM / FWTM 152.0° / 161.0°            Efficiency 94 %            Peak intensity 0.5 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>NICHIA</b></p> <p>LED NVSxE21A            FWHM / FWTM 134.0° / 144.0°            Efficiency 94 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b></p> <p>LED PL-BRICK HP 3800 2x8 SSG            FWHM / FWTM Asymmetric            Efficiency 96 %            Peak intensity 0.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED Duris S8            FWHM / FWTM 141.0° / 153.0°            Efficiency 88 %            Peak intensity 0.3 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p> <p>Protective plate, glass</p>		




#### OPTICAL RESULTS (MEASURED):

#### OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM 148.0° / 159.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

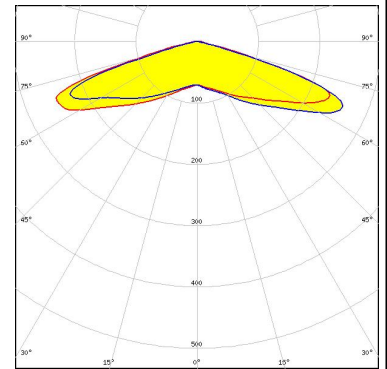

#### OSRAM


Opto Semiconductors

LED OSLON Square PC  
 FWHM / FWTM 143.0° / 160.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

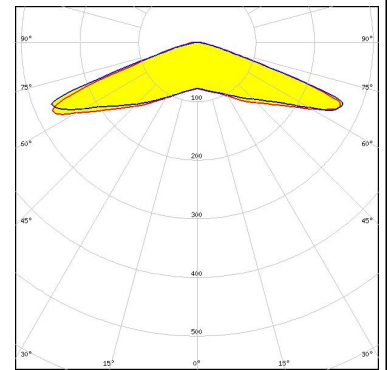


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4  
 FWHM / FWTM 146.0° / 156.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

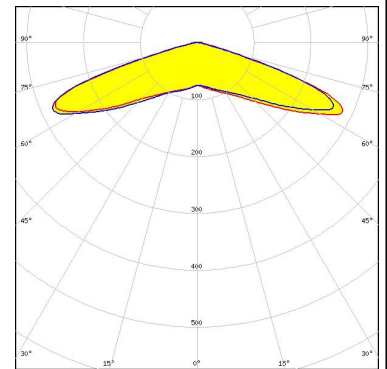

#### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM 152.0° / 160.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

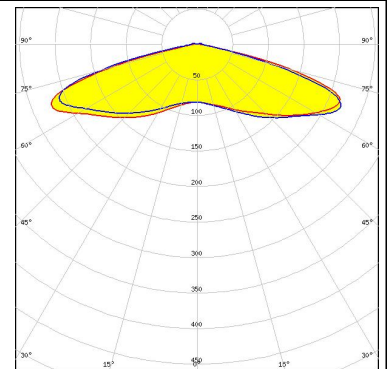

#### OPTICAL RESULTS (MEASURED):


### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5  
 FWHM / FWTM 146.0° / 156.0°  
 Efficiency 97 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

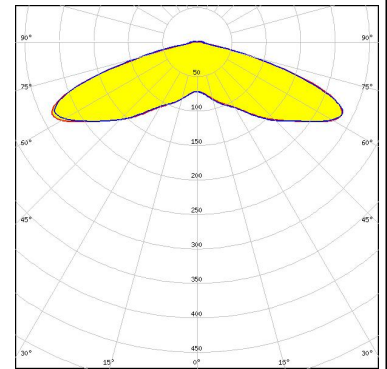


### SAMSUNG

LED HiLOM RC12 Z (LH181B)  
 FWHM / FWTM 138.0° / 148.0°  
 Efficiency 99 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

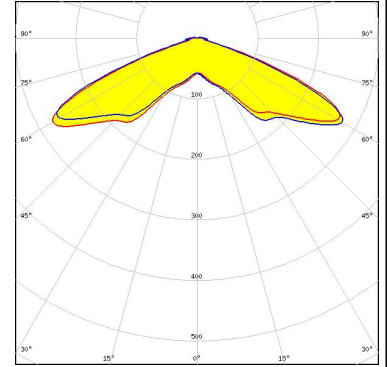


### SAMSUNG

LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM 147.0° / 156.0°  
 Efficiency 97 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

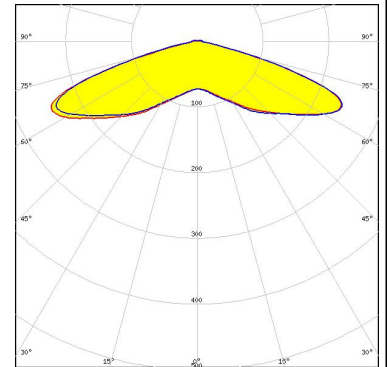

### SAMSUNG


LED HiLOM RH16 (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

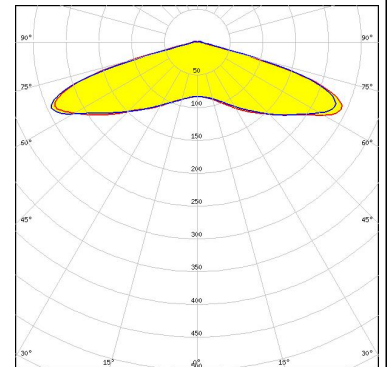

#### OPTICAL RESULTS (MEASURED):


### SAMSUNG

LED HiLOM RM12 Z (LH502C)  
FWHM / FWTM 144.0° / 157.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/m  
LEDs/each optic 1  
Light colour White  
Required components:

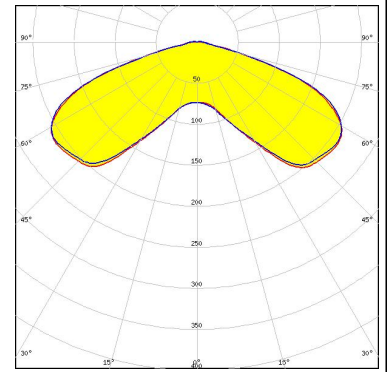


### SAMSUNG

LED HiLOM RM16 Z (LH502C)  
FWHM / FWTM 144.0° / 156.0°  
Efficiency 98 %  
Peak intensity 0.3 cd/m  
LEDs/each optic 1  
Light colour White  
Required components:

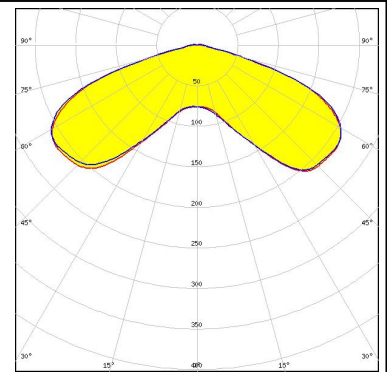


### SAMSUNG

LED HiLOM RM8 Z (LH502C)  
FWHM / FWTM 144.0° / 157.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/m  
LEDs/each optic 1  
Light colour White  
Required components:

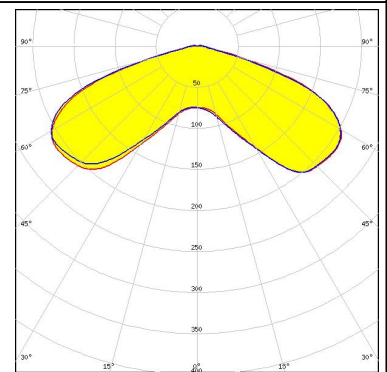

### SAMSUNG


LED LH351B  
FWHM / FWTM 153.0° / 161.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/m  
LEDs/each optic 1  
Light colour White  
Required components:

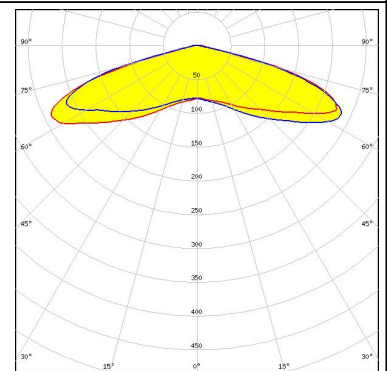

#### OPTICAL RESULTS (MEASURED):


#### SAMSUNG

LED LH351C  
 FWHM / FWTM 149.0° / 157.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

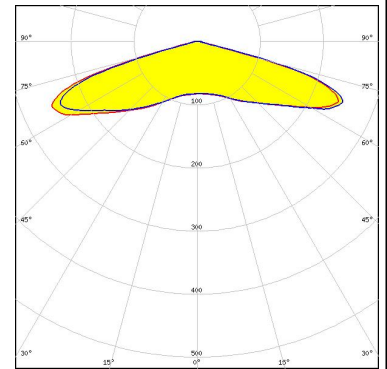


#### SAMSUNG

LED LH351D  
 FWHM / FWTM 156.0° / 162.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

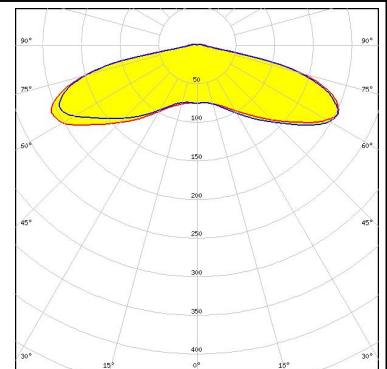


#### SAMSUNG





LED LH508A  
 FWHM / FWTM 146.0° / 157.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

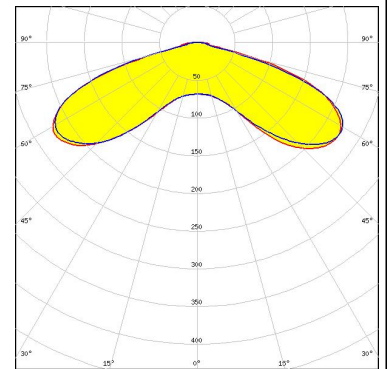

LED LED-Pa-L15c2W11c2-xxx-C050-01  
 FWHM / FWTM 146.0° / 156.0°  
 Efficiency 98 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

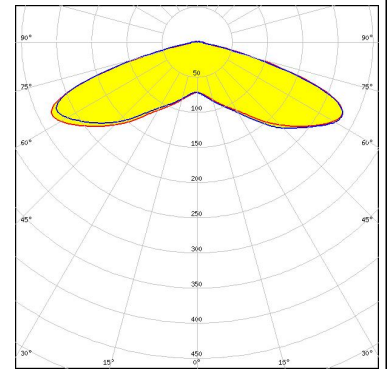

#### OPTICAL RESULTS (MEASURED):
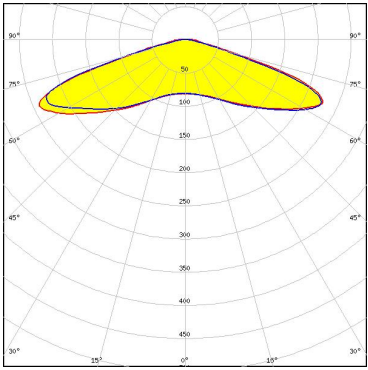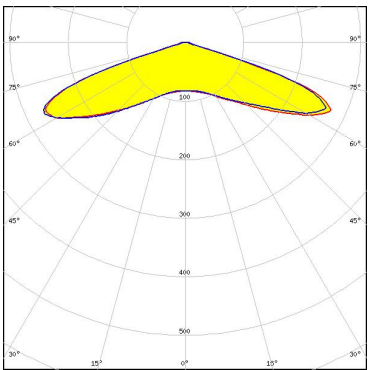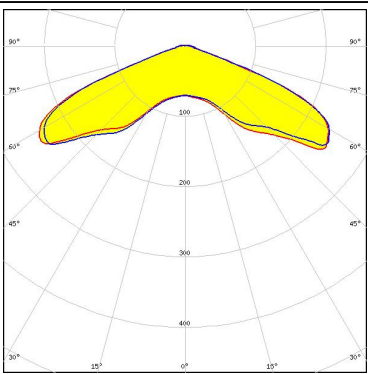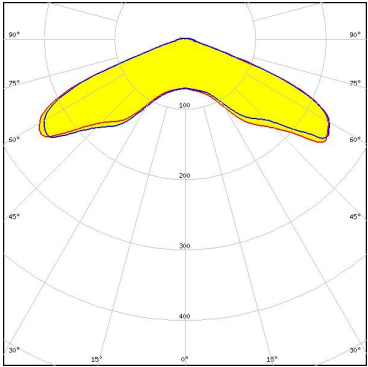
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M3</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M4</p> <p>FWHM / FWTM 144.0° / 149.0°</p> <p>Efficiency 98 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22</p> <p>FWHM / FWTM 141.0° / 151.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22P</p> <p>FWHM / FWTM 146.0° / 161.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


#### OPTICAL RESULTS (MEASURED):

#### TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


#### TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

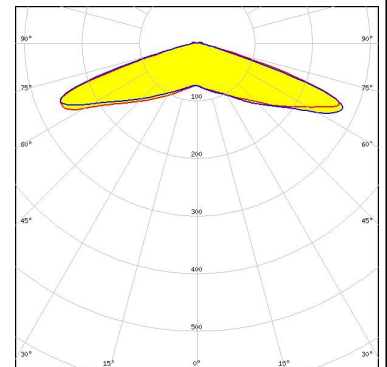


#### TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD  
 FWHM / FWTM 139.0° / 155.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

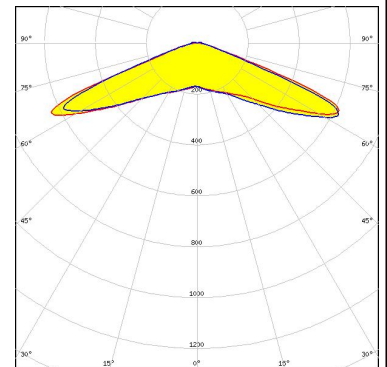

#### TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD  
 FWHM / FWTM 139.0° / 155.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

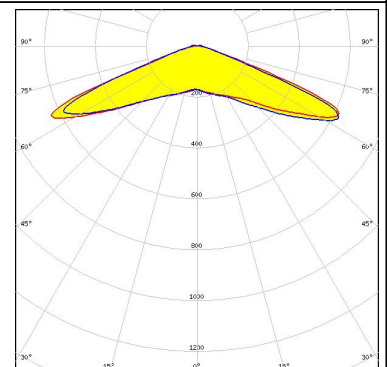

#### OPTICAL RESULTS (MEASURED):


#### TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:




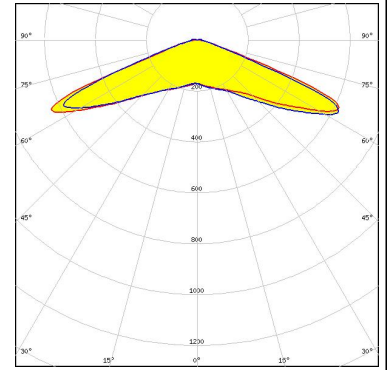


#### TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:




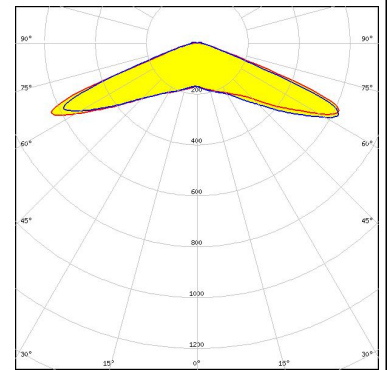


#### OPTICAL RESULTS (SIMULATED):

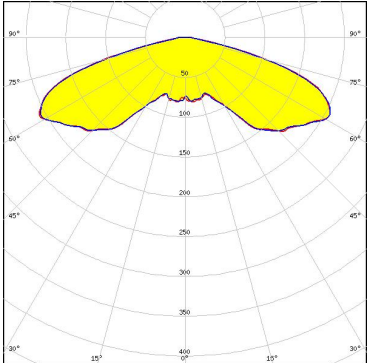
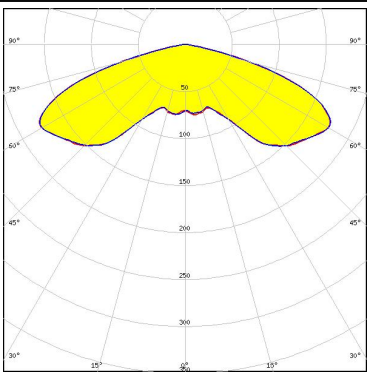
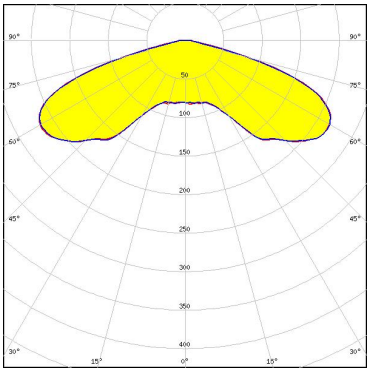
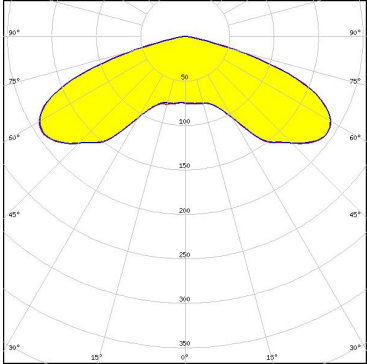
<p><b>CREE LED</b></p> <p>LED J Series 5050 Square LES 30V            FWHM / FWTM 150.0° / 162.0°            Efficiency 91 %            Peak intensity 0.3 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>CREE LED</b></p> <p>LED J Series 5050 Square LES 30V            FWHM / FWTM 146.0° / 160.0°            Efficiency 74 %            Peak intensity 0.2 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p> <p>Protective plate, glass</p>	
<p><b>CREE LED</b></p> <p>LED J Series 5050 Square LES 6V            FWHM / FWTM 148.0° / 160.0°            Efficiency 97 %            Peak intensity 0.3 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>CREE LED</b></p> <p>LED J Series 5050 Square LES 6V            FWHM / FWTM 144.0° / 158.0°            Efficiency 80 %            Peak intensity 0.3 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p> <p>Protective plate, glass</p>	



#### OPTICAL RESULTS (SIMULATED):
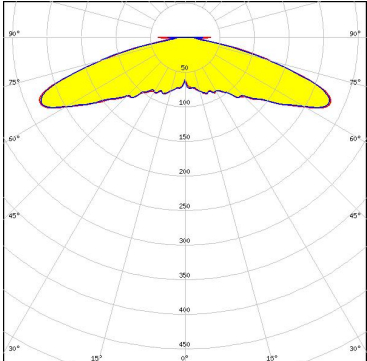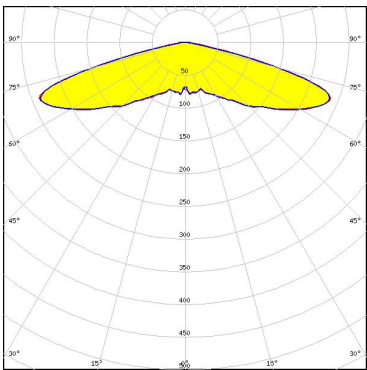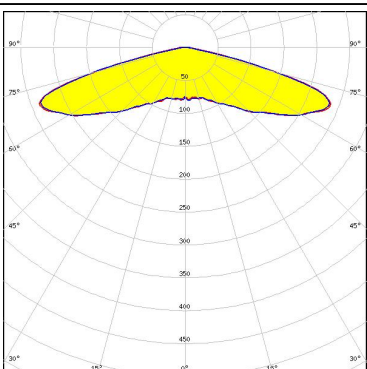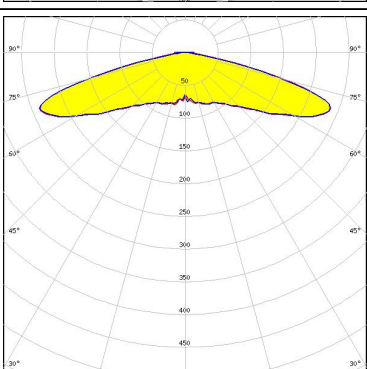
<p><b>CREE</b> → <b>LED</b></p> <p>LED XB-D            FWHM / FWTM 151.0° / 180.0°            Efficiency 94 %            Peak intensity 0.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>CREE</b> → <b>LED</b></p> <p>LED XM-L            FWHM / FWTM 152.0° / 161.0°            Efficiency 96 %            Peak intensity 0.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>CREE</b> → <b>LED</b></p> <p>LED XM-L2            FWHM / FWTM 152.0° / 160.0°            Efficiency 96 %            Peak intensity 0.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>CREE</b> → <b>LED</b></p> <p>LED XP-G            FWHM / FWTM 152.0° / 163.0°            Efficiency 95 %            Peak intensity 0.4 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):
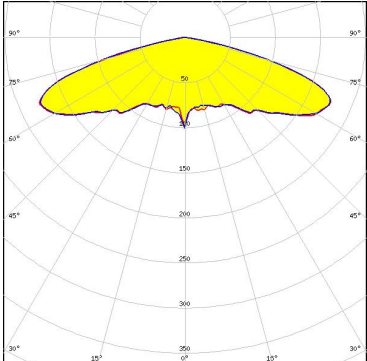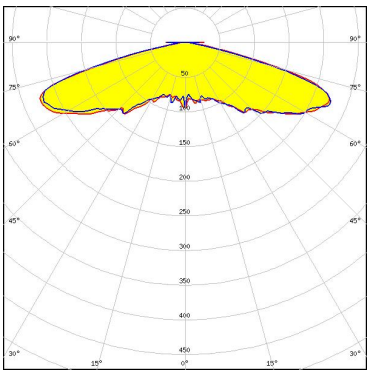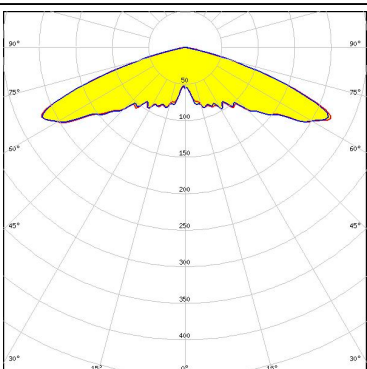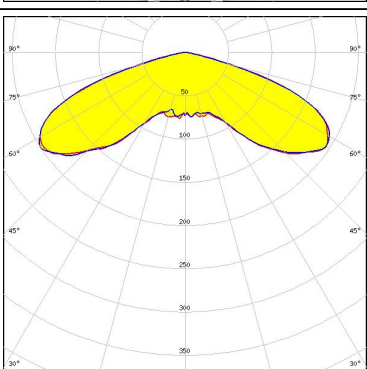
<p><b>CREE</b> LED</p> <p>LED: XP-G3            FWHM / FWTM: 150.0° / 161.0°            Efficiency: 74 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Protective plate, glass</p>	
<p><b>CREE</b> LED</p> <p>LED: XP-L2            FWHM / FWTM: 151.0° / 161.0°            Efficiency: 94 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>CREE</b> LED</p> <p>LED: XP-P            FWHM / FWTM: 144.0° / 156.0°            Efficiency: 78 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Protective plate, glass</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON 5050 Round LES            FWHM / FWTM: Asymmetric            Efficiency: 81 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Protective plate, glass</p>	

#### OPTICAL RESULTS (SIMULATED):


<p><b>LUMILEDS</b></p> <p>LED: LUXEON 5050 Square LES</p> <p>FWHM / FWTM: Asymmetric</p> <p>Efficiency: 80 %</p> <p>Peak intensity: 0.3 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p> <p>Protective plate, glass</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON 5050 Square LES</p> <p>FWHM / FWTM: 148.0° / 161.0°</p> <p>Efficiency: 96 %</p> <p>Peak intensity: 0.3 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON HL2X</p> <p>FWHM / FWTM: 150.0° / 158.0°</p> <p>Efficiency: 95 %</p> <p>Peak intensity: 0.4 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON HL2Z</p> <p>FWHM / FWTM: 142.0° / 152.0°</p> <p>Efficiency: 95 %</p> <p>Peak intensity: 0.5 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):

##### LUMILEDS


LED LUXEON HL2Z  
 FWHM / FWTM 140.0° / 152.0°  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

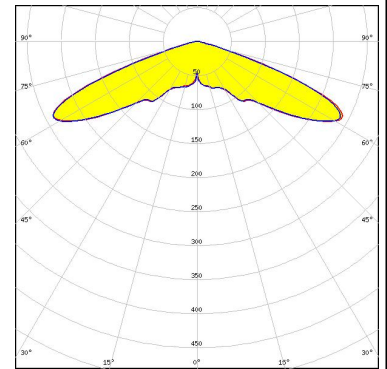


##### LUMILEDS

LED LUXEON MZ  
 FWHM / FWTM 146.0° / 157.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

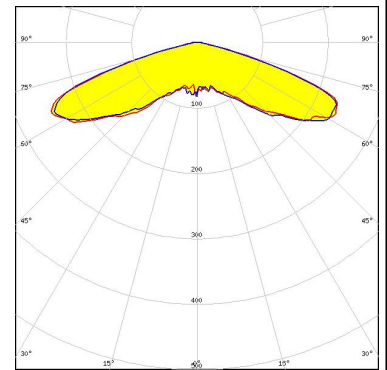


##### LUMILEDS

LED LUXEON Rebel ES  
 FWHM / FWTM 146.0° / 158.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




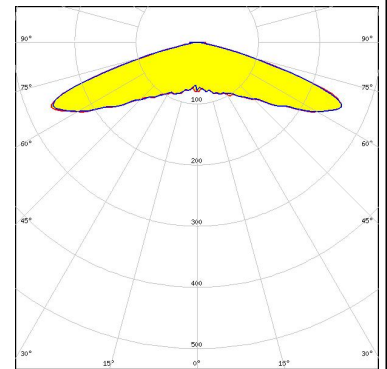


##### LUMILEDS





LED LUXEON T  
 FWHM / FWTM 150.0° / 160.0°  
 Efficiency 96 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

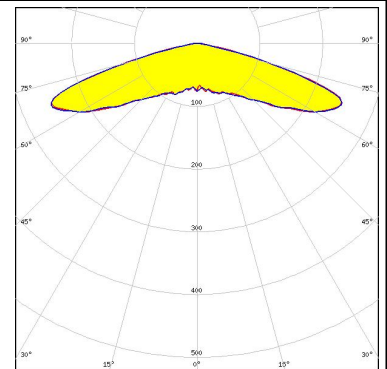





#### OPTICAL RESULTS (SIMULATED):
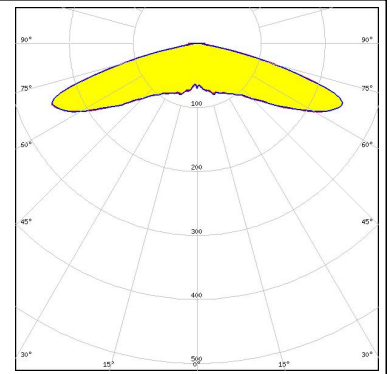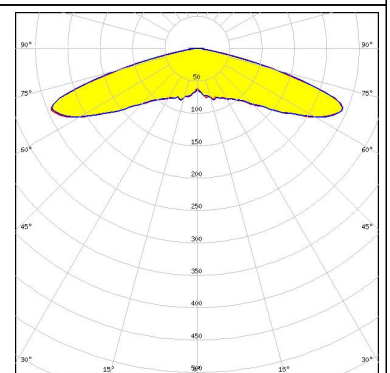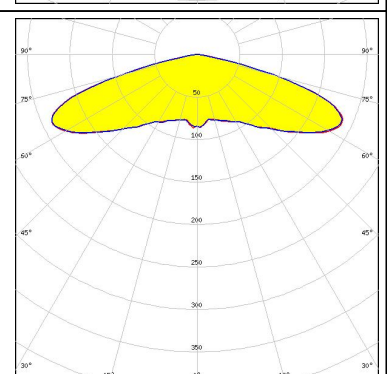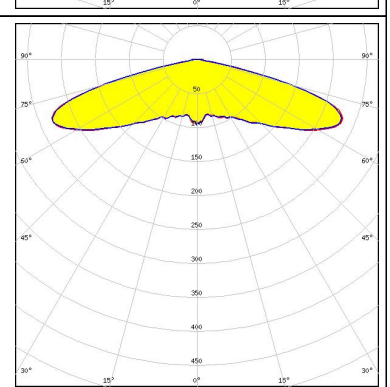
<p><b>LUMILEDS</b></p> <p>LED: LUXEON TX            FWHM / FWTM: 150.0° / 161.0°            Efficiency: 95 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON TX            FWHM / FWTM: 150.0° / 160.0°            Efficiency: 95 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)            FWHM / FWTM: 150.0° / 160.0°            Efficiency: 76 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p>Protective plate, glass</p>	
<p><b>LUMILEDS</b></p> <p>LED: LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)            FWHM / FWTM: 152.0° / 160.0°            Efficiency: 96 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	





#### OPTICAL RESULTS (SIMULATED):
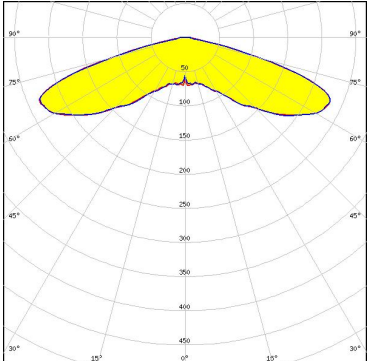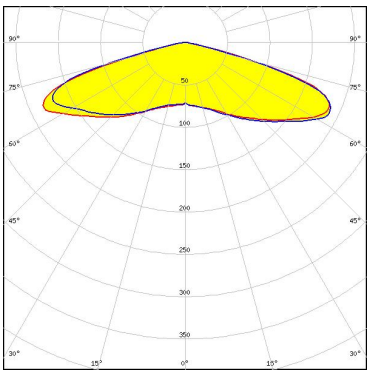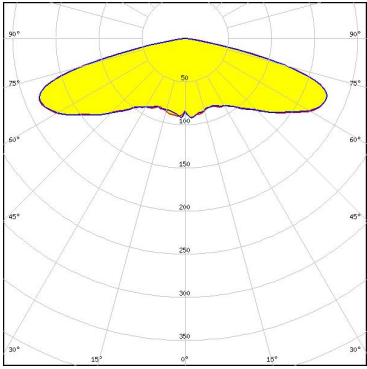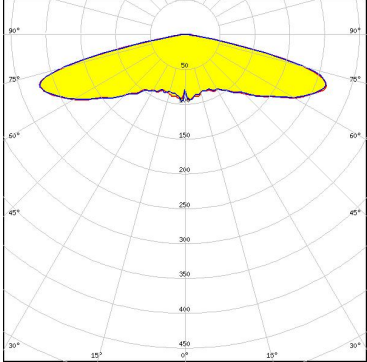
<p><b>NICHIA</b></p> <p>LED: NV4WB35AM            FWHM / FWTM: 150.0° / 160.0°            Efficiency: 96 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>NICHIA</b></p> <p>LED: NVSW219F            FWHM / FWTM: Asymmetric            Efficiency: 77 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p style="background-color: #e0f2f7; padding: 2px; display: inline-block;">Protective plate, glass</p>	
<p><b>NICHIA</b></p> <p>LED: NVSW519A            FWHM / FWTM: 152.0° / 162.0°            Efficiency: 77 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p> <p style="background-color: #e0f2f7; padding: 2px; display: inline-block;">Protective plate, glass</p>	
<p><b>NICHIA</b></p> <p>LED: NVSW519A            FWHM / FWTM: 154.0° / 163.0 + 162.0°            Efficiency: 93 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):
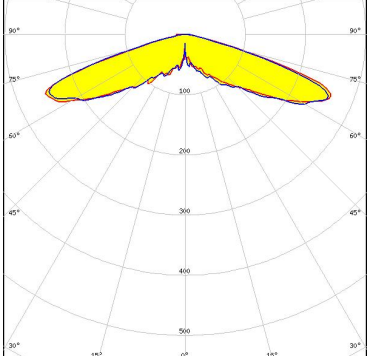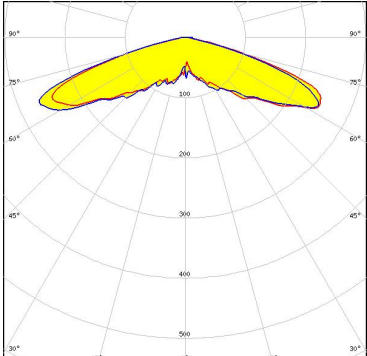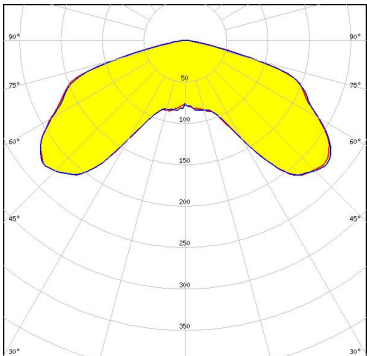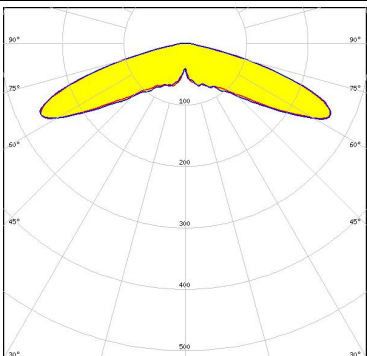
<p><b>NICHIA</b></p> <p>LED: NVSxx19B/NVSxx19C            FWHM / FWTM: Asymmetric            Efficiency: 92 %            Peak intensity: 0.5 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b></p> <p>LED: PrevaLED Brick HP 2x8            FWHM / FWTM: 146.0° / 160.0°            Efficiency: 93 %            Peak intensity: 1.6 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED: OSCONIQ C 2424            FWHM / FWTM: 146.0° / 160.0°            Efficiency: 95 %            Peak intensity: 0.3 cd/lm            LEDs/each optic: 4            Light colour: White            Required components:</p>	
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED: OSCONIQ P 3030            FWHM / FWTM: 148.0° / 162.0°            Efficiency: 95 %            Peak intensity: 0.4 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):
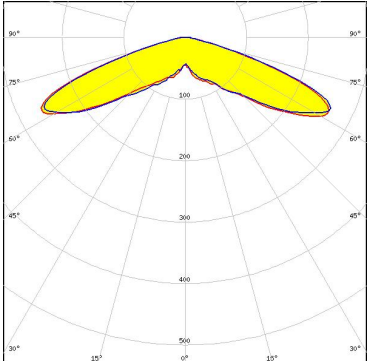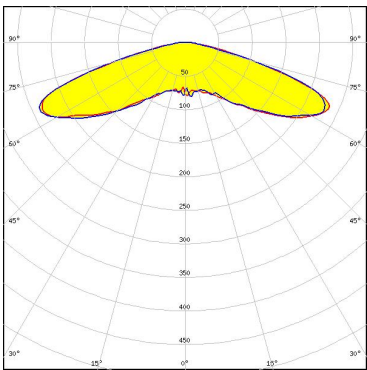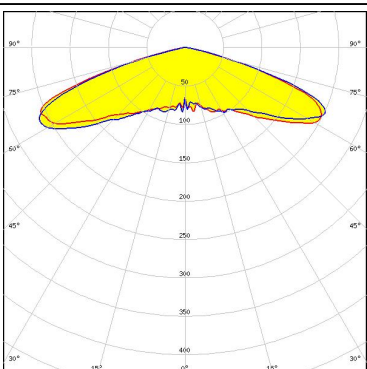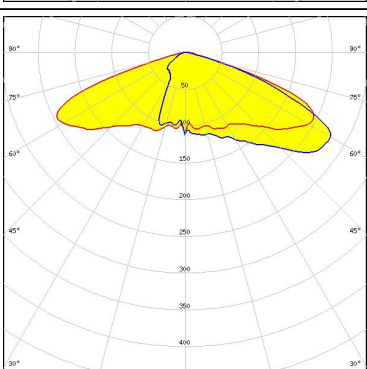
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (2W version)</p> <p>FWHM / FWTM 144.0° / 158.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (3W version)</p> <p>FWHM / FWTM 148.0° / 164.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLON Square CSSRM2/CSSRM3</p> <p>FWHM / FWTM 146.0° / 156.0°</p> <p>Efficiency 79 %</p> <p>Peak intensity 0.3 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p style="background-color: #ADD8E6; padding: 2px;">Protective plate, glass</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSLON Square CSSRM2/CSSRM3</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 57 %</p> <p>Peak intensity 0.3 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p> <p>C17580_STRADA-2X2-SHD-WHT</p> <p style="background-color: #ADD8E6; padding: 2px;">Protective plate, glass</p>	




#### OPTICAL RESULTS (SIMULATED):

##### OSRAM

Opto Semiconductors


LED OSLOM Square EC  
 FWHM / FWTM 144.0° / 156.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

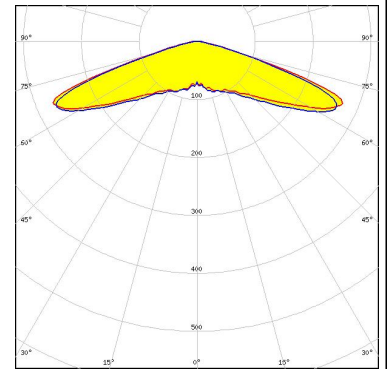

##### OSRAM

Opto Semiconductors


LED OSLOM SSL 150  
 FWHM / FWTM 152.0° / 160.0°  
 Efficiency 96 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

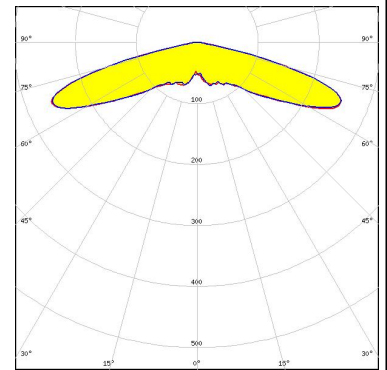

##### OSRAM

Opto Semiconductors


LED OSLOM SSL 80  
 FWHM / FWTM 138.0° / 164.0°  
 Efficiency 95 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

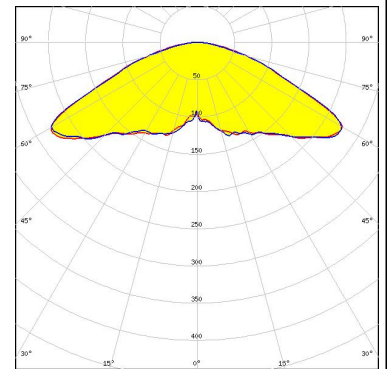

##### OSRAM

Opto Semiconductors

LED SFH 4714A  
 FWHM / FWTM 148.0° / 156.0°  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

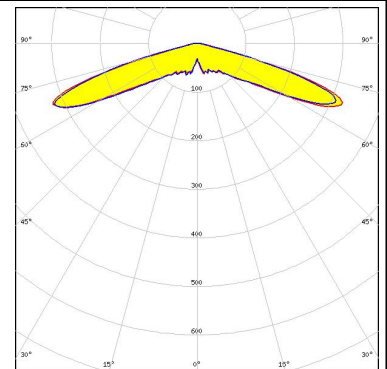


#### OPTICAL RESULTS (SIMULATED):

#### OSRAM


Opto Semiconductors

LED SFH 4714A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

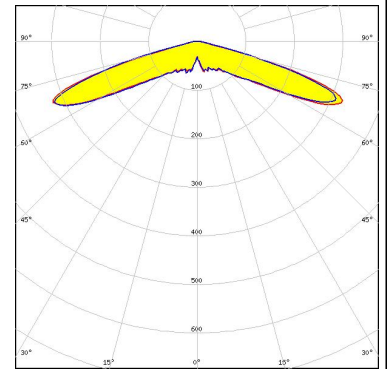


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM Asymmetric  
 Efficiency 50 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

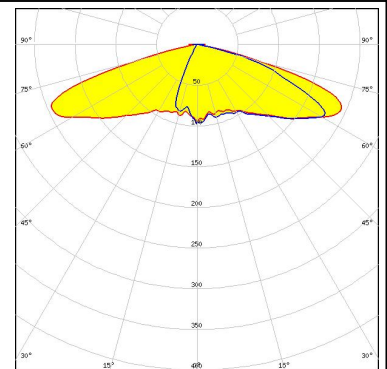

#### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM Asymmetric  
 Efficiency 43 %  
 Peak intensity 0.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

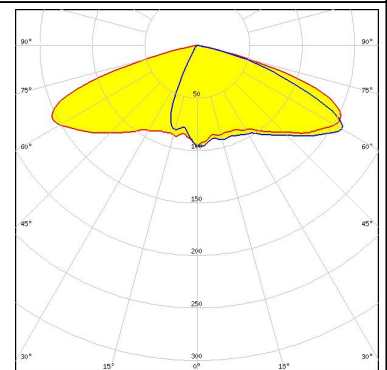

Protective plate, glass

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE  
 FWHM / FWTM 144.0° / 158.0°  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

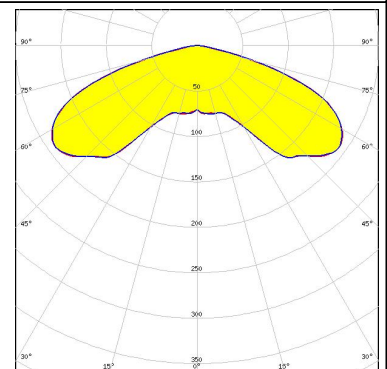


Protective plate, glass

#### OPTICAL RESULTS (SIMULATED):


### PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE  
 FWHM / FWTM 148.0° / 162.0 + 160.0°  
 Efficiency 97 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

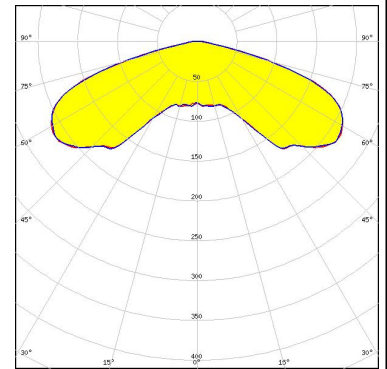

### PHILIPS


LED Fortimo FastFlex LED 2x8 DAX G4  
 FWHM / FWTM 154.0° / 165.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

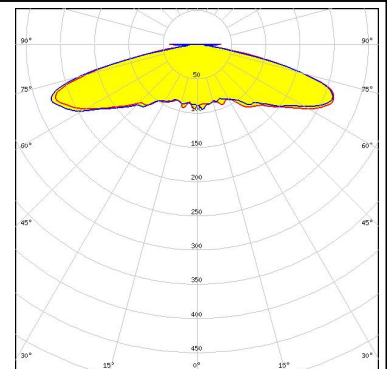

### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4  
 FWHM / FWTM 152.0° / 164.0°  
 Efficiency 74 %  
 Peak intensity 0.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

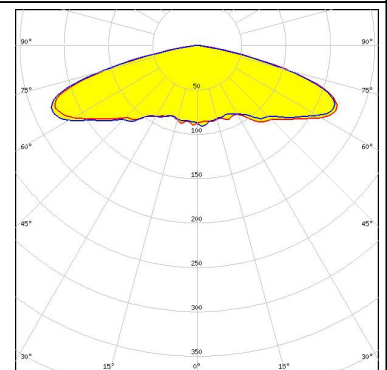

### SAMSUNG

LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

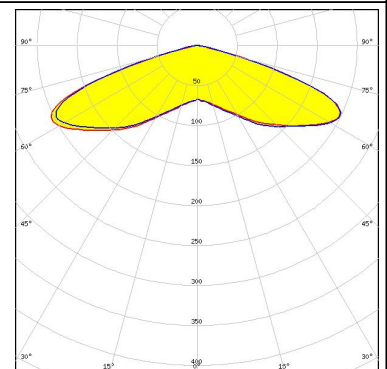


#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

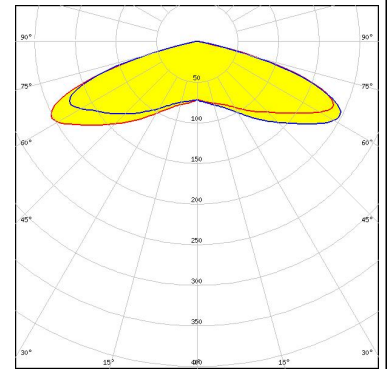

#### SAMSUNG

LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

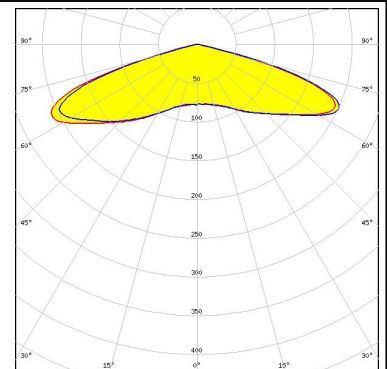

#### SAMSUNG


LED LH502C  
 FWHM / FWTM 144.0° / 156.0°  
 Efficiency 80 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

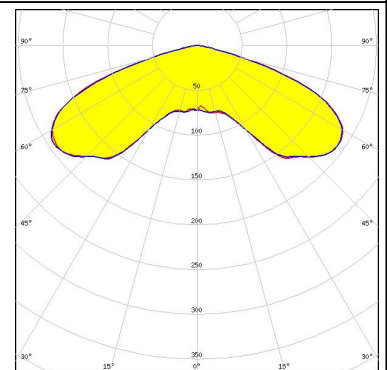

#### SAMSUNG


LED LH502C  
 FWHM / FWTM 146.0° / 160.0°  
 Efficiency 97 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

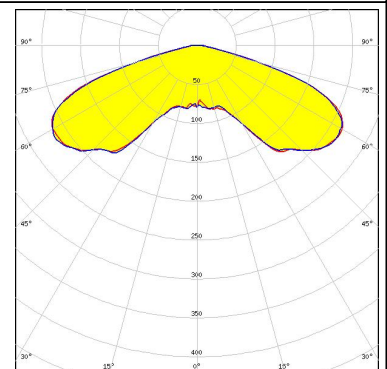

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH502D  
 FWHM / FWTM 148.0° / 162.0° + 160.0°  
 Efficiency 97 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

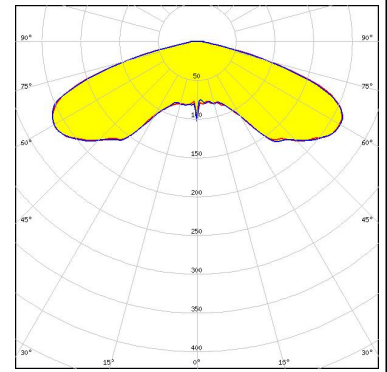

### SAMSUNG


LED LH502D  
 FWHM / FWTM 145.0° + 144.0° / 158.0°  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

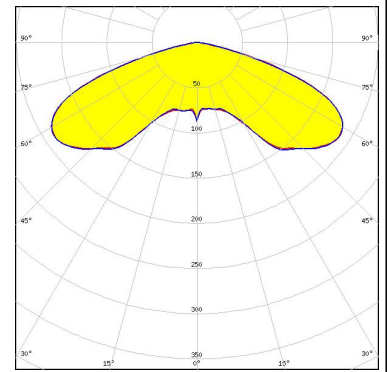


SEOUL SEMICONDUCTOR

LED MJT 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

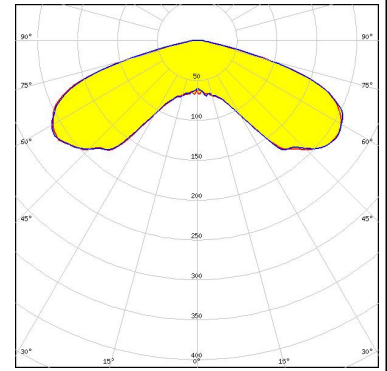


SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C  
 FWHM / FWTM 148.0° / 160.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

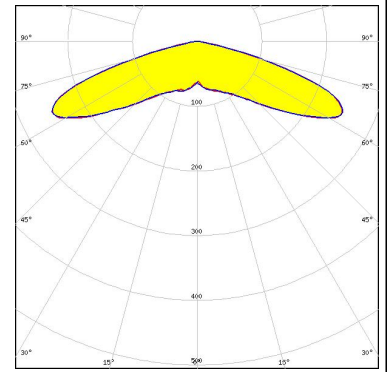

### OPTICAL RESULTS (SIMULATED):
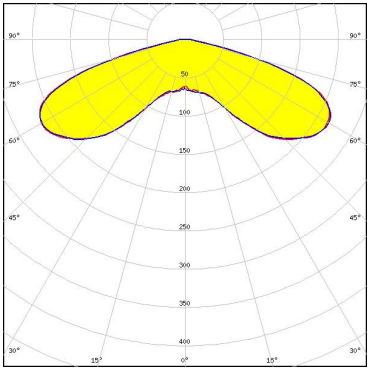
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL DC 5050 6V</p> <p>FWHM / FWTM: 148.0° / 161.0°</p> <p>Efficiency: 96 %</p> <p>Peak intensity: 0.3 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	
<p> SEOL SEMICONDUCTOR</p> <p>LED: Z5</p> <p>FWHM / FWTM: 147.0° / 160.0°</p> <p>Efficiency: 95 %</p> <p>Peak intensity: 0.4 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)