


- NOTE:
- ELECTRICAL CHARACTERISTICS
  - 1-1 RATING CURRENT: 2A AC/DC
  - 1-2 RATING VOLTAGE: 250V AC/DC
  - 1-3 WITHSTANDING VOLTAGE: 800V AC/1MINUTE
  - 1-4 OPERATING TEMPERATURE: -40°C~+105°C
  - MATERIAL: REFER TO ORDERING CODE
  - FINISH: BRIGHT TIN PLATING
  - USED WITH AFCI 10156612
  - PRODUCT SPEC: GS-12-1594
  - ORDERING CODE: 10156613-2 X 0 X LF

MATERIAL \_\_\_\_\_ PACKAGE  
 +BRASS 1: REEL  
 2: PHOSPHOR BRONZE  
 SEE CONTACT INFORMATION

10156613-X20XL F	AWG#22~24 0.35~0.22mm <sup>2</sup>	φ1.60MM MAX	1.60MM	1.70MM	2.00MM
10156613-X10XL F	AWG#24~26 0.22~0.15mm <sup>2</sup>	φ1.30MM MAX	1.25MM	1.55MM	1.85MM
PART NO.	WIRE SIZE	INSULATION O.D.	DIM"A"	DIM"B"	DIM"C"

mat'l. code	surf'ce	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	MINITEK	
tolerances unless otherwise specified	.X±.3	mm		
angles	.XX±.20	mm		
linear	.XXX±.10	mm		
0±x'	scale 2:1			

RECOMMENDED PCB LAYOUT  
 THICKNESS: 1.60MM

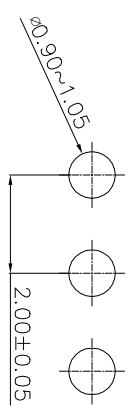

sheet index	revision	sheet	1	1	1
dr	engr	chr	qppd	Jason Wang	Tim Yoo
2020-1-19	2020-4-2	-	2020-4-2		
title			2.0PITCH BOARD-IN, R/A, TERMINAL		
dwg no			10156613		
sheet 1 of 1			size A3		
type			Product Customer Drawing		