


REV. 0
DCO 143305

COIL: @ 25°C
 RESISTANCE 720 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE 4 MS MAX
RELEASE 6 MS MAX
CONTACT BOUNCE 2.0 MS MAX

CUSTOMER DATA SHEET

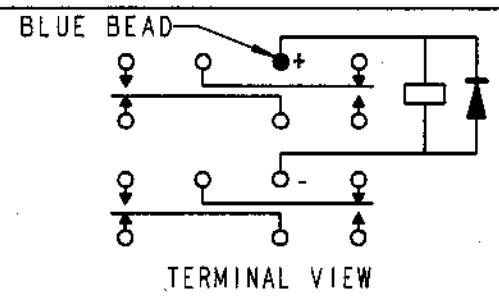

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. ASB 11/13/01 CK/V13/01/AB

CII Technologies
 advanced control electronic solutions

CUST. CII STD
 CUST. NO. _____ REV. _____

"3SBH" RELAY

3SBH5134K5