

Three-wire installation terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 6 mm, Colour: Beige

### Business data

|  |                                   |
|--|-----------------------------------|
| Article number                             | 1415.2                            |
| Article name                               | DLIS 2,5 N BG                     |
| GTIN (EAN)                                 | 4044211044602                     |
| Colour                                     | Beige                             |
| Packaging unit                             | 50                                |
| Quantity unit                              | PC                                |
| Weight per piece (not including packaging) | 9.4 g                             |
| Weight per piece (including packaging)     | 10.76 g                           |
| Unit of weight                             | G                                 |
| Customs number                             | 85369010                          |
| Country of origin                          | DE                                |
| Product description                        | Three-wire installation terminals |

# Data sheet

## 1415.2 DLIS 2,5 N BG

### Technical data

#### Dimensions

|                  |         |
|------------------|---------|
| Length           | 90.5 mm |
| Width            | 6 mm    |
| Height TS 35/7.5 | 53 mm   |

#### Ratings

|   |                     |
|---|---------------------|
| Rated voltage                                   | 400 V               |
| Rated current                                   | 24 A                |
| Rated cross-section                             | 2.5 mm <sup>2</sup> |
| Rated impulse voltage                           | 4 kV                |
| Overvoltage category                            | III                 |
| Contamination degree                            | 3                   |
| Maximum power dissipation for nominal condition | 0.77 W              |

#### Connection data

|  |                     |
|--|---------------------|
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Connections  | 2                   |
| Number of potentials                                     | 1                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 4 mm <sup>2</sup>   |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 4 mm <sup>2</sup>   |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm <sup>2</sup> |
| Wire cross-section AWG, min.                             | 22                  |
| Wire cross-section AWG, max.                             | 14                  |
| Stripping length   | 8 mm                |
| Screw head   | Slotted             |
| Screw threading  | M 2,5               |
| Tightening torque, min.                                  | 0.4 Nm              |
| Tightening torque, max.                                  | 0.8 Nm              |
| N-function possible                                      | ✓                   |

---

### Technical data

---

#### Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-2           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 105 °C        |

#### Further technical data

|                                     |                         |
|-------------------------------------|-------------------------|
| Mounting type                       | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1      | A3                      |
| Number of cross-connection channels | 1                       |
| End plate required                  | ✓                       |

#### Environmental Product Compliance



|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2022-06-10 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

---

### Media

---

**M2.5**

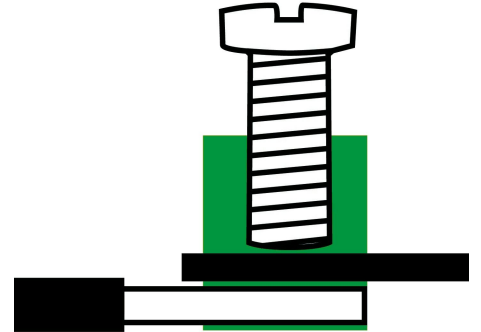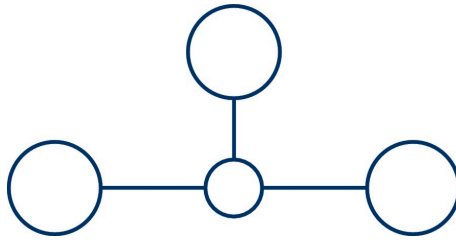

### Accessories


#### End plate



End plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2829.2</u>  | AP 2,5/S BG  | 4044211055554 | 20 ST          |

#### End stop




End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

| Article number | Article name  | GTIN (EAN)    | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>2828.0</u>  | ES 35/K/ST BG | 4044211055547 | 50             |

#### Cross-connector

#### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

| Article number | Article name   | GTIN (EAN)    | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4702.7</u>  | PMC SB 6/50 WH | 4044211089986 | 500 ST         |

#### Screwdriver

#### Insulation plate



Insulation plate, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2566.2</u>  | TRS 3 BG     | 4044211053567 | 100 ST         |