


2105-7521-019

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	01/16/98	D.N.

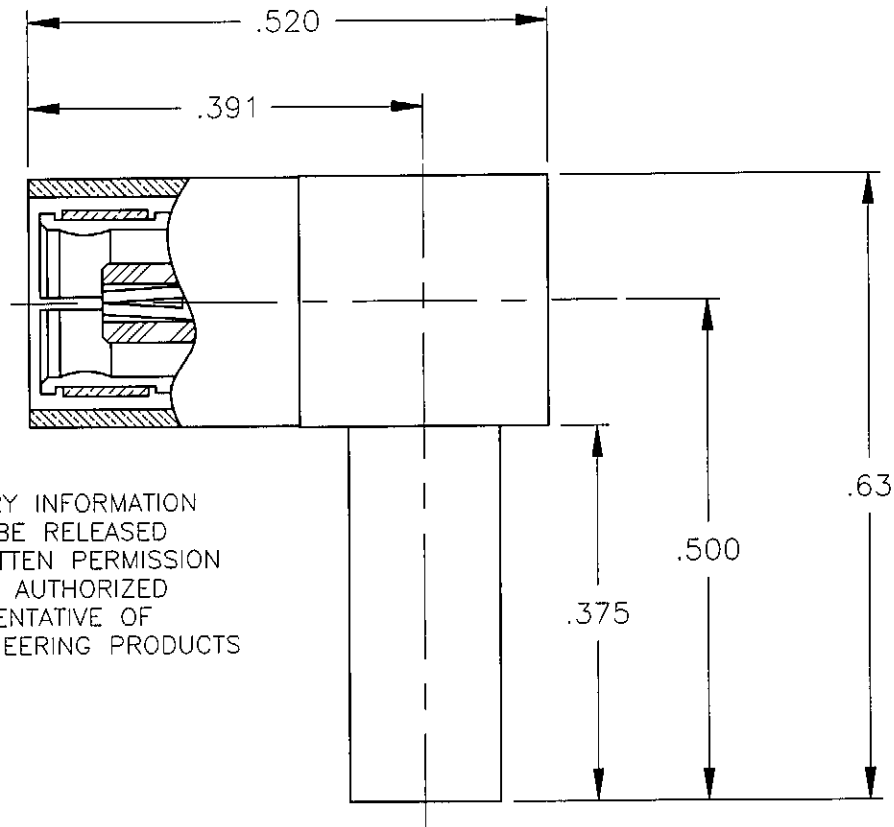

PROPRIETARY INFORMATION  
NOT TO BE RELEASED  
WITHOUT WRITTEN PERMISSION  
FROM AN AUTHORIZED  
REPRESENTATIVE OF  
APPLIED ENGINEERING PRODUCTS

NOTES: CONFORMS TO MIL-PRF-39012 SMB SERIES

MATERIAL:

1. INSULATORS = TEFLON, VIRGIN WHITE PER ASTM D1710, GRADE 1, TYPE I, CLASS "A".
2. CONTACT & SPRING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. CRIMP SLEEVE = SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50.
4. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 - .0002 THK. OVER .00005 - .0001 THK. COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON			DWN: D.N. 01/15/98		APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513	
DECIMAL			CHKD: C.T. 01/16/98		SMB FEMALE RIGHT ANGLE CABLE PLUG, FOR USE WITH RD-316 CABLE	
FRAC			APVD: M.S. 01/16/98			
ANGLE			FINISH: SEE NOTES		SIZE A	FSCM NO. 19505
1/64			SEE NOTES		DWG NO. 2105-7521-019	
±2°			MATERIAL: SEE NOTES		SCALE 5:1	REV -
SEE NOTES			SEE NOTES		CADFILE 2105-7521-019	
					SHEET 1 OF 1	

2105-7521-019