
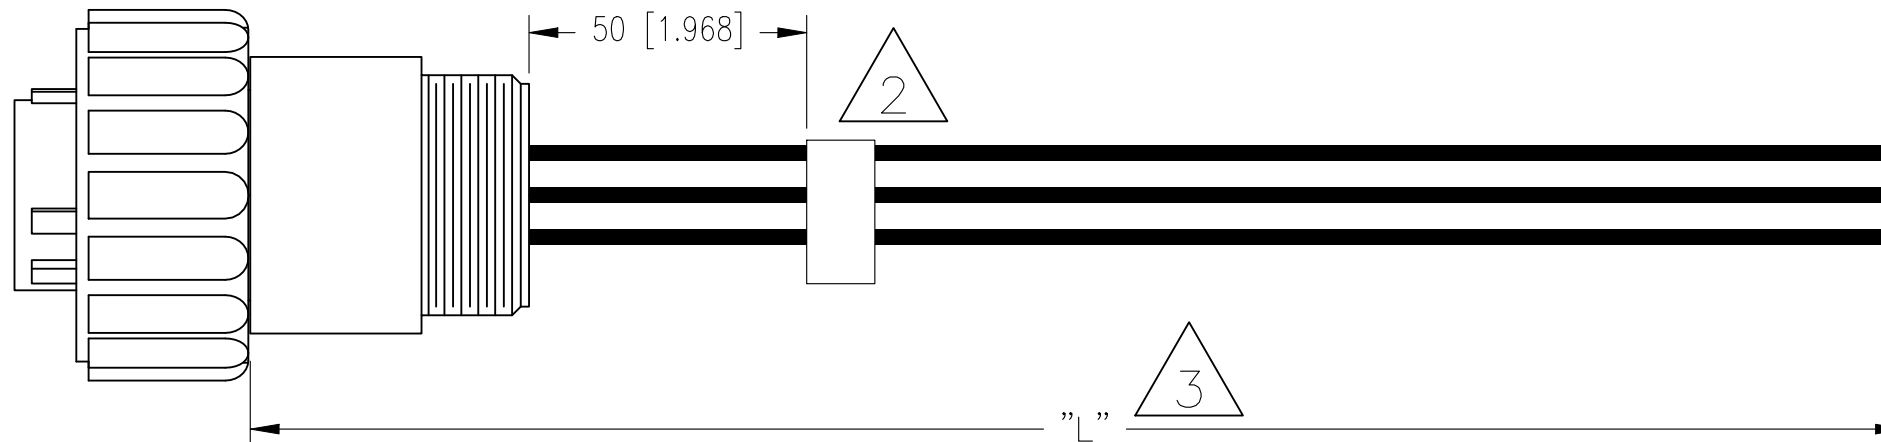


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	B	INITIAL RELEASE	08NOV2021	GSK JDA

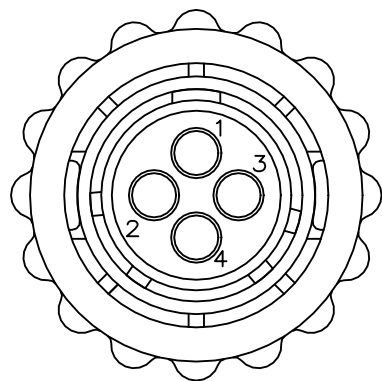

NOTES:

1. OVERALL INSULATION CRIMP DIAMETER, INCLUDING CRIMP BARREL, MUST NOT EXCEED .125 [3.18]

2 LABEL LOCATED APPROXIMATELY WHERE SHOWN. LABEL INFORMATION AS FOLLOWS:

2386906-X	TE P/N
REV B	CUST REV
TE/MEXICO	MANUFACTURER NAME/COUNTRY OF ORIGIN
MM/DD/YY	DATE CODE

4. TOLERANCES PER IPC STANDARD:
IPC-A-620A

Metric	
<0.3 m	+25mm -0mm
>0.3 m - 1.5m	+50mm -0mm
>1.5 m - 3m	+100mm -0mm
>3 m - 7.5m	+150mm -0mm
>7.5m	+5% -0%

- 5. HARNESS SHALL BE SHIPPED IN SEALED PLASTIC BAG.
- 6. CONTINUITY ELECTRICAL TEST MUST BE PERFORMED.
- 7. WIRE 18 AWG

3 "L" REPRESENTS THE LENGTH OF THE WIRE USED FOR THE LEADS.

TE PN	LENGTH "L"
2386906-1	0.5M
2386906-2	1.0M
2386906-3	2.0M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SATHISH KUMAR G 08NOV2021		
DIMENSIONS: mm [INCHES]		CHK JUAN AVILA 08NOV2021		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JUAN AVILA 08NOV2021	NAME CPC PLUG CONNECTOR CABLE, REVERSE SEX, SERIES 1, 11-4	
		PRODUCT SPEC -	APPLICATION SPEC -	
MATERIAL -		FINISH -	WEIGHT -	RESTRICTED TO -
		SIZE A3	CAGE CODE 00779	DRAWING NO C-2386906
		CUSTOMER DRAWING		SCALE NTS
		SHEET 1 OF 1		REV B