



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIV

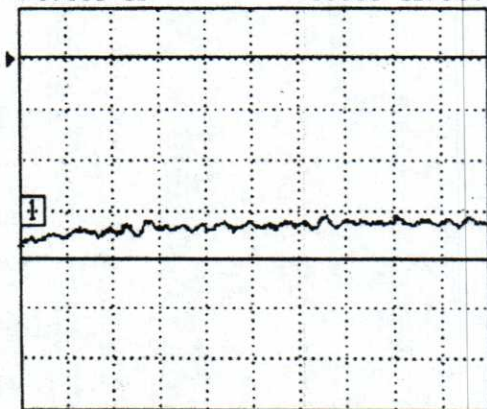


10.70000000 GHz 12.75000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

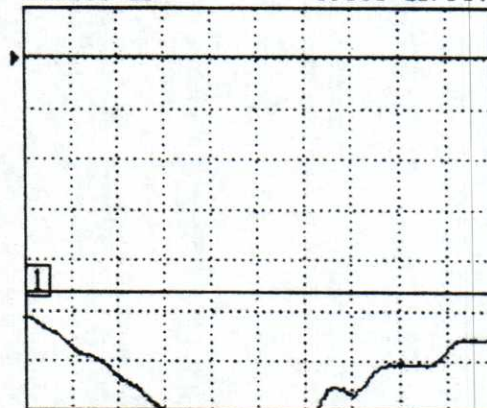


10.70000000 GHz 12.75000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

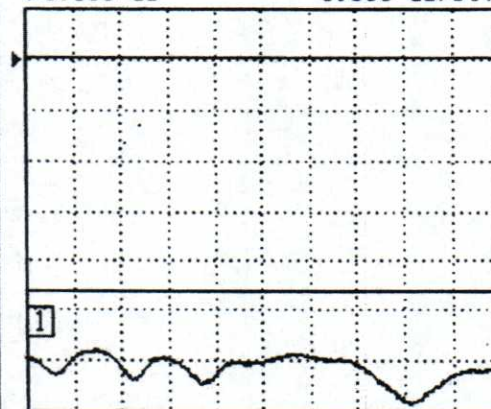

10.70000000 GHz 12.75000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

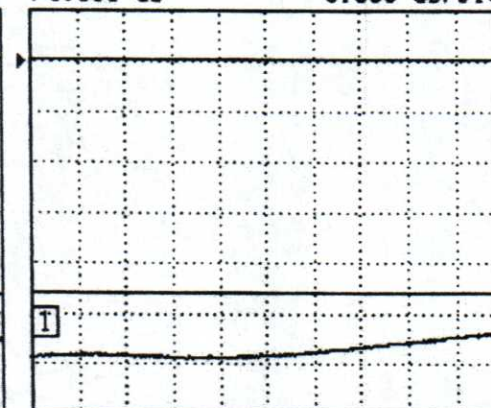

10.70000000 GHz 12.75000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
10.705125000 GHz
-0.376 dB

MARKER TO MAX
▶ MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3C1012 - circulator

10.70 - 12.75 GHz

Isolation: 20 dB Min

Insertion Loss: 0.50 dB Max

VSWR: 1.25:1 Max

SMA-F All 3 Ports