


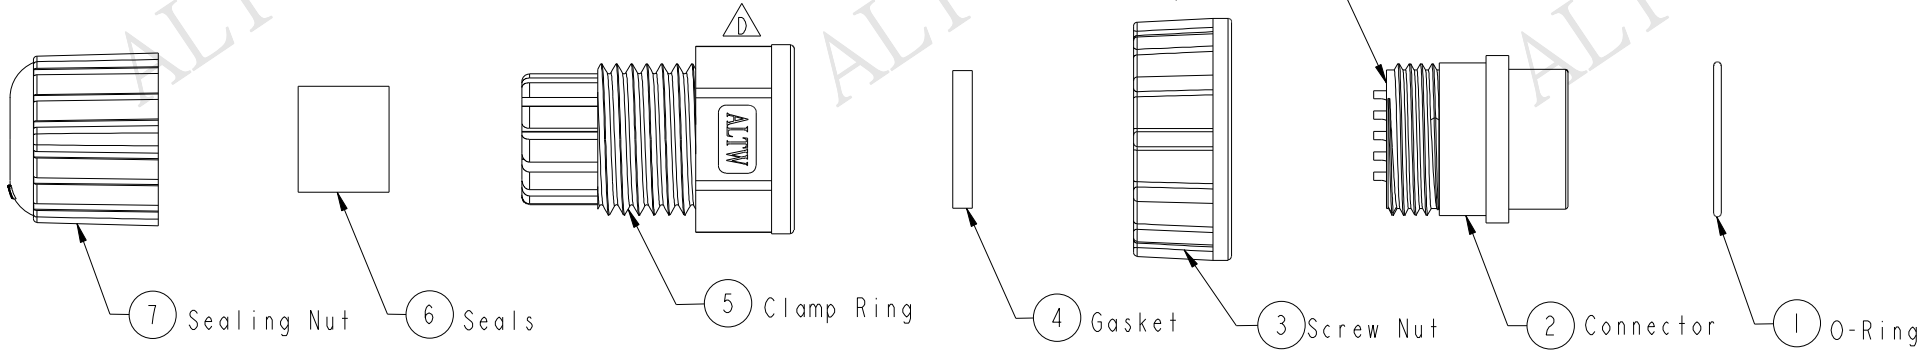



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		2007/02/08	ZangXiaoRong	Change 18.0 to 18.5mm.
C	LEN11C0005	2011/11/30	Vicky	REF. TO ECR/N.NOTE.
D	LEN1580257	2015/04/28	Jinhai	Change Logo

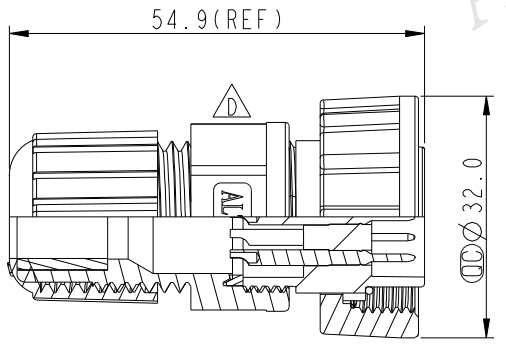

- Note:
- * \varnothing Important Dimension.
 - * $\triangle C$ Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Ring: EPDM, Black
 - * $\triangle C$ Screw Nut: Nylon+GF, Black.
 - * Gasket: Black, Silicone
 - * Clamp Ring: Black, Nylon+GF
 - * Seals: EPDM, Black.
 - * Sealing Nut: Nylon, Black.
 - * Seals For Cable OD: $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
(防水墊圈線徑:) $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
 - * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)



Pin Assignments
Front View 前視圖

UNIT: mm		
TOLERANCE		
.X	± 0.25	
.XX	± 0.1	
.XXX	± 0.05	
ANGLES	$\pm 1^\circ$	

TITLE Screw Type Conn. For Field Installation 180° 18Pin Female Connector Male Pin(5A)			
SCALE	SIZE	SHEET	OF
1:1	A4	1	1
REV.	WC-REV.	\varnothing : Inspection item	
D	A.2		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DD-18BFMA-SL7001	DRAWN BY	Jinhai	DATE	2015-04-28
DWG NO	DD-18BFMA-SL7001	CHECKED BY	Tom	DATE	2015-04-28
CUSTOMER	ALTW	APPROVED BY	Jerry	DATE	2015-04-28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.