
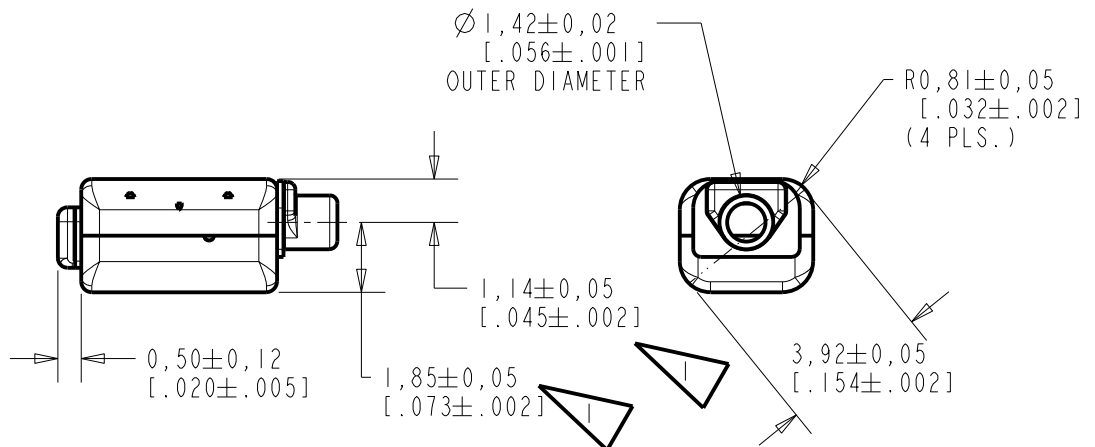
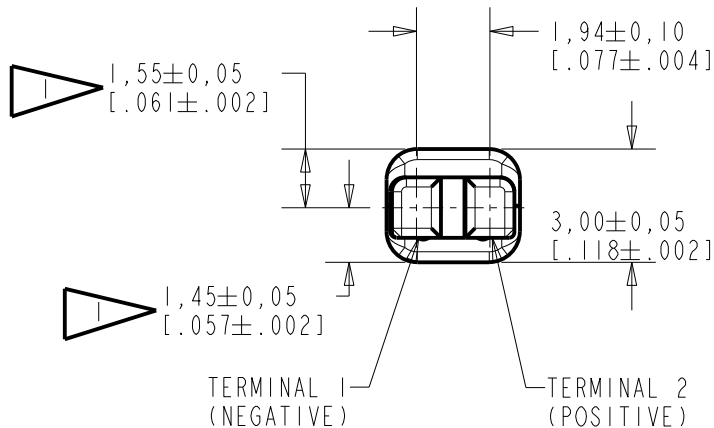
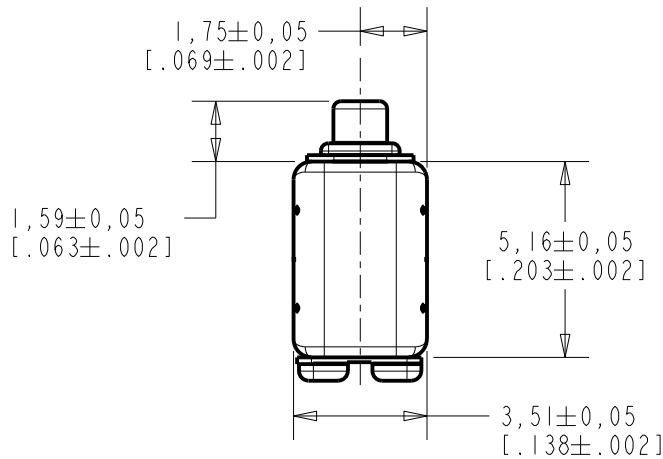


HC-23765-000

SHT 1.1

NOTE:


 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO  $\pm 0,17$  [.007].



SCALE 2:1

NOMINAL WEIGHT  
.23 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

| Revision | C.O. #    | Implementation Date | RELEASE LEVEL | REVISION |
|----------|-----------|---------------------|---------------|----------|
| C        | C10118120 | 2-25-11             | Active        | C        |
| B        | C10103946 | 2-20-06             |               |          |
| A        | C10103365 | 11-29-05            |               |          |

|                      |  |         |          |
|----------------------|--|---------|----------|
| SCALE: 5:1           |  | DR. BY  | DATE     |
| DO NOT SCALE DRAWING |  | AB      | 11-29-05 |
| TITLE: RECEIVER      |  | CK. BY  | DATE     |
| OUTLINE DRAWING      |  | GJP     | 12-5-05  |
| HC-23765-000         |  | APP. BY | DATE     |
| SHT 1.1              |  | GJP     | 12-5-05  |

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

# DESCRIPTION


NO DAMPING

HC-23765-000  
SHEET 2.1

THE HC-23765-000 IS A MAGNETIC BALANCED ARMATURE RECEIVER INTENDED FOR USE IN ITC AND CIC HEARING INSTRUMENTS. THE HC FAMILY OFFERS 6 dB HIGHER OUTPUT LEVELS IN THE SAME SIZE PACKAGE AS THE FC FAMILY. ALL HC UNITS HAVE SHOCK PROTECTION. THIS MODEL HAS LOW IMPEDANCE AND IS UNDAMPED.

NOTE: SPECIFICATIONS FOLLOWED BY AN ASTERISK (\*) ARE 100% TESTED.

## CONSTANT VOLTAGE DRIVE RESPONSE

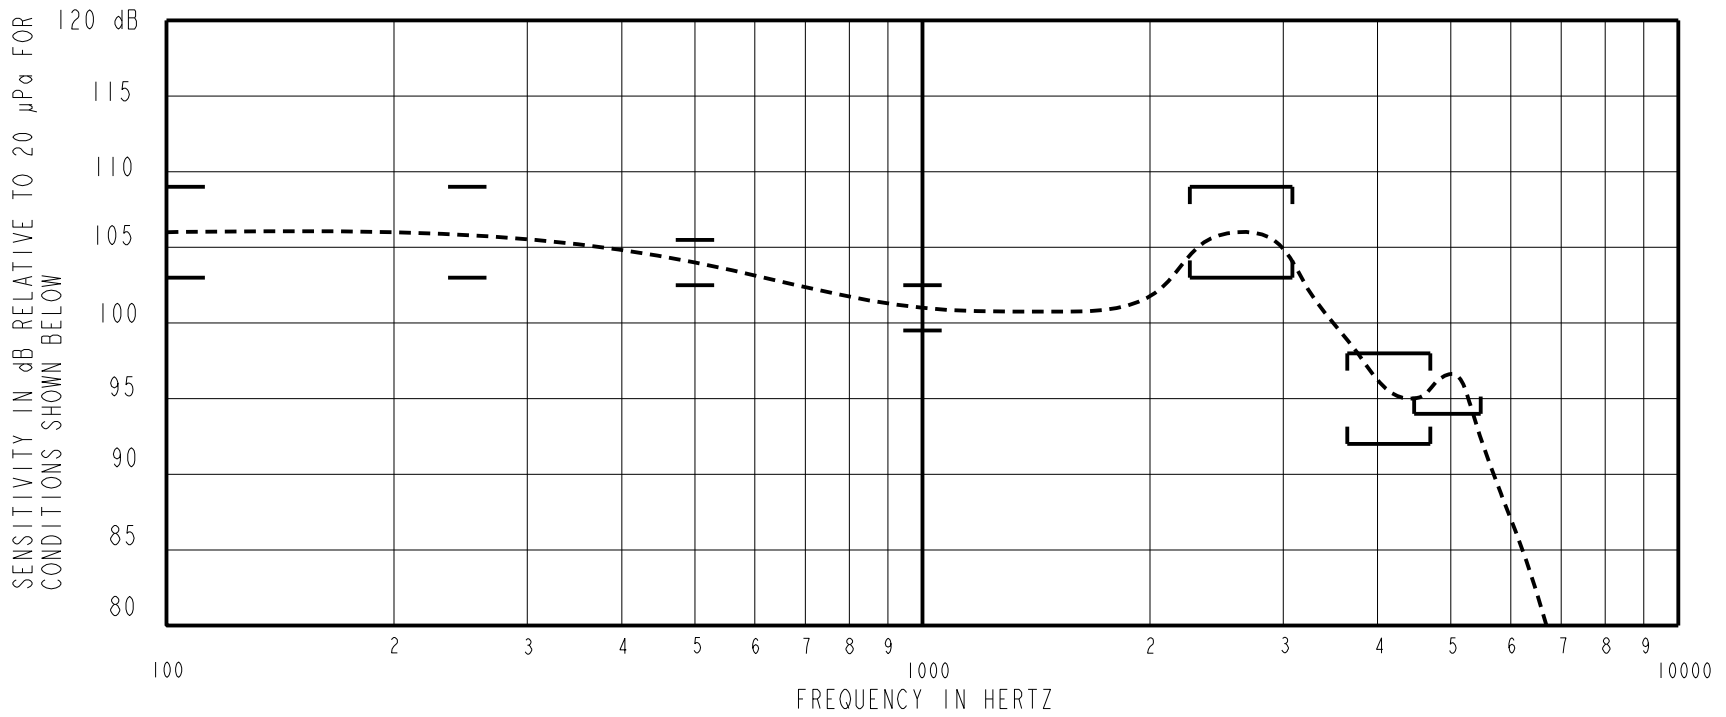

## ACOUSTICAL

**SENSITIVITY\***  
DEVICE WILL PRODUCE THE SPL LISTED BELOW WITH THE TEST CONDITIONS DESCRIBED IN TABLE 3. NOMINAL SENSITIVITY AT 1 kHz IS dB RELATIVE TO 20µPa. ALL OTHER VALUES IN dB RELATIVE TO THE SENSITIVITY AT 1 kHz.

| FREQUENCY (Hz)   | MINIMUM | NOMINAL | MAXIMUM |
|------------------|---------|---------|---------|
| 100              | +2.0    | +5.0    | +8.0    |
| 250              | +2.0    | +5.0    | +8.0    |
| 500              | +1.5    | +3.0    | +4.5    |
| 1000             | -1.5    | 101.0   | +1.5    |
| 2300-3100 PEAK   | +2.0    | +5.0    | +8.0    |
| 3680-4720 VALLEY | -9.0    | -6.0    | -3.0    |
| 4500-5500 PEAK   | -7.0    | ---     | ---     |

TABLE 1.

**TOTAL HARMONIC DISTORTION\***  
DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

| FREQUENCY (Hz) | DRIVE (V RMS) | DC BIAS (MA) | LIMIT (%) |
|----------------|---------------|--------------|-----------|
| 900            | 0.119 V       | 0            | 5         |
| 1350           | 0.119 V       | 0            | 5         |
| 500            | 0.336 V       | 0            | 10        |

TABLE 2.

## TEST CONDITIONS

|                        |   |
|------------------------|---|
| NOMINAL SOURCE VOLTAGE | 0.119 Vrms, 0 Vdc BIAS                            |
| SOURCE IMPEDANCE       | < 1 Ω   |
| TUBING                 | 10 mm (.394) LONG, 1 mm (.039) ID.                |
| COUPLER CAVITY         | 2 CC SIMULATED ANSI S3.7 TYPE HA-3, (IEC 60318-5) |

TABLE 3.

**POLARITY \***  
POSITIVE SIGNAL APPLIED TO TERMINAL 2 WILL PRODUCE A DECREASE IN SOUND PRESSURE AT THE SOUND OUTLET.


## ELECTRICAL

|                      |            |   |
|----------------------|------------|---|
| DC RESISTANCE        | 20Ω ±10%   | * |
| IMPEDANCE @ 500 Hz   | 33Ω ±15%   | * |
| IMPEDANCE @ 1 kHz    | 53Ω ±20%   | * |
| INDUCTANCE @ 500Hz   | 9.5mH ±15% |   |
| CAPACITANCE @ 10 MHz | 6pF ±20%   |   |

TABLE 4.

**ISOLATION:** THE CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT\*

**MAGNETIC RADIATION**  
WORST CASE: FIELD WILL BE LESS THAN LEVEL STATED BELOW AT AMPLIFIER CLIPPING (.920 V).  
134 dB re 1µA/m  
DISTANCE OF 6.3 mm FROM CENTER OF RECEIVER  
ANGLE OF 120 DEGREES FROM TUBE

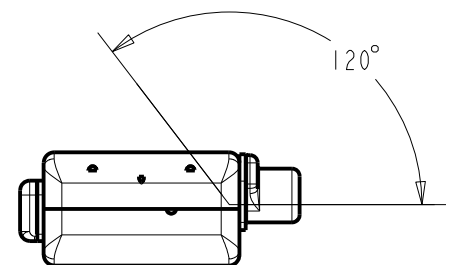

## MECHANICAL

PORT LOCATION: 12C

SOLDER TYPE: SAC 305

## TEMPERATURE

OPERATING: SENSITIVITY WILL NOT VARY MORE THAN +1/-3 dB FROM -17°C TO 63°C  
STORAGE: -40°C TO 63°C

## RELIABILITY

UNITS WILL SURVIVE ANY OF THE FOLLOWING ACCELERATED LIFE TESTS, REPORT AVAILABLE FROM QA DEPARTMENT

HALT TEST (8 WEEKS, 63°C, 95% RH, 0.83V, 500 Hz SIGNAL)  
HIGH TEMPERATURE STORAGE (63°C, 72 HOURS)  
LOW TEMPERATURE STORAGE (-40°C, 72 HOURS)  
DAMP HEAT CYCLING (ALTERNATE 25°C TO 63°C, 93% RH, 20 CYCLES)  
THERMAL SHOCK (-40°C TO 63°C, 5 CYCLES)  
SOLDER/DESOLDER CYCLING (5 CYCLES)  
SOLDER PAD STRENGTH (STRENGTH > 1.8 LBS.)  
STRESS TEST (2.23 Vrms AT 2700 Hz SIGNAL, 1 HOUR)  
MECHANICAL SHOCK  
LEAK TEST AFTER AGING (NO LEAK AFTER ANY OF THE ABOVE TESTS)

| Revision   | C.O. #    | Implementation Date | RELEASE LEVEL           | REVISION |
|--|-----------|---------------------|-------------------------|----------|
| C  | CI0118120 | 2-25-11             | Active                  | C        |
| B  | CI0103946 | 2-20-06             |                         |          |
| A  | CI0103365 | 11-29-05            |                         |          |
| WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION |           |                     | DR. BY                  | DATE     |
| TITLE: <b>RECEIVER</b><br>PERFORMANCE SPECIFICATION  |           |                     | AB                      | 11-29-05 |
|  |           |                     | HC-23765-000<br>SHT 2.1 |          |
|  |           |                     | GJP                     | 12-5-05  |
|  |           |                     | APP. BY                 | DATE     |
|  |           |                     | GJP                     | 12-5-05  |

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.