


No-Fray Expandable Braided Polyester Sleeving

Features

- Material may be Cut with a Scissors Without Obvious Fray
- Flame Retardant – Flammability Rating VW-1
- Easy to Install, Lightweight and Flexible
- Allows Flexibility while Providing Secure Bundling
- Bundles Cables and Organizes Wires for a Professional Look
- 10 foot (3.048 meter), 50 foot (15.24 meter) and 100 foot (30.48 meter) Spools
- Material: Flame Retardant Polyethylene Terephthalate (PET)
- Working Temperature Range: -50° to +150°C (-58° to +302°F)
- Melting Point: +240°C ±10° (+464°F ±10°)

ES-01

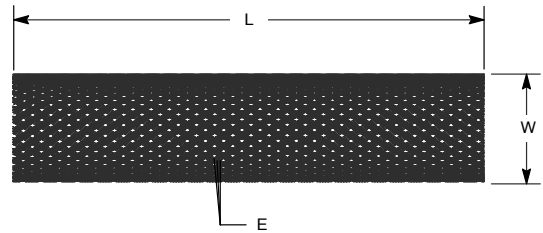

No-Fray Expandable Braided Polyester Sleeving

| NTE Type No. | | | Size (inch) | Expandable Range, I to O (in. / mm) | Diag No. |
|----------------|---------------|----------------|-------------|-------------------------------------|----------|
| 10 Foot | 50 Foot Spool | 100 Foot Spool | | | |
| 04-ESNF125-10 | 04-ESNF-125L | 04-ESNF-125C | 1/8" | .039 (1.0) - .197 (5.0) | ES-01 |
| 04-ESNF250-10 | 04-ESNF-250L | 04-ESNF-250C | 1/4" | .118 (3.0) - .315 (8.0) | ES-01 |
| 04-ESNF375-10 | 04-ESNF-375L | 04-ESNF-375C | 3/8" | .275 (7.0) - .472 (12.0) | ES-01 |
| 04-ESNF500-10 | 04-ESNF-500L | 04-ESNF-500C | 1/2" | .315 (8.0) - .551 (14.0) | ES-01 |
| 04-ESNF750-10 | 04-ESNF-750L | 04-ESNF-750C | 3/4" | .551 (14.0) - .905 (23.0) | ES-01 |
| 04-ESNF1000-10 | 04-ESNF-1000L | 04-ESNF-1000C | 1" | .707 (18.0) - 1.102 (28.0) | ES-01 |