


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/03/17	C	DIM. 3.50 WAS 3.18 DIM. 150.0 WAS 152.4 ADDED DIM. 5.0	T.B.	B.S.	
04/07/17	D	UPDATED MOUNTING INSTRUCTION	T.B.	B.S.	
04/14/17	E	DIM. 3.05 WAS 3.50	T.B.	B.S.	
05/05/17	F	DIM. 3.40 WAS 3.05 DIM. 4.70 WAS 5.33	T.B.	B.S.	

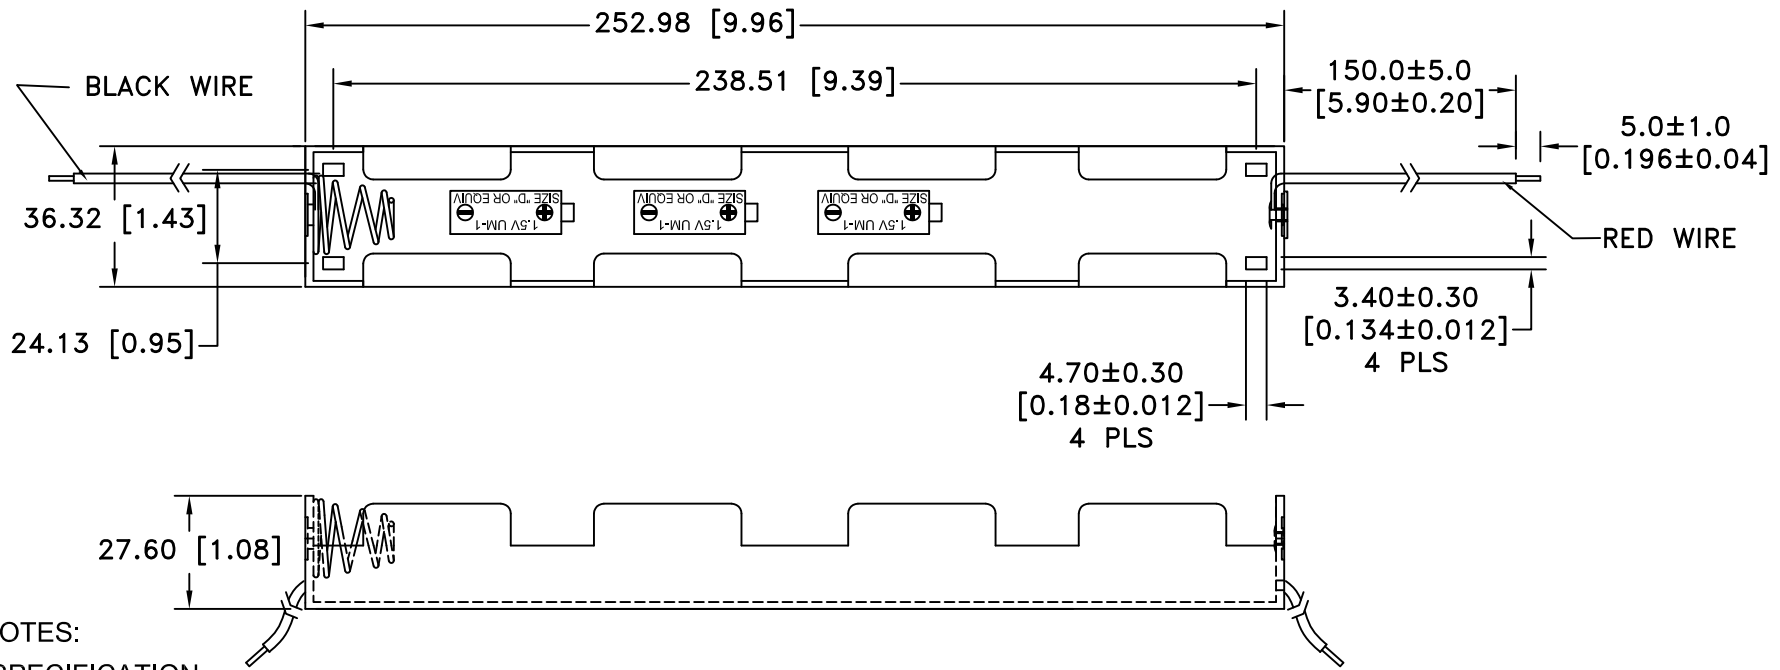

NOTES:


SPECIFICATION:

1. MATERIAL:

- HOUSING : BLACK POLYPROPYLENE
- FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
- TEMPERATURE RANGE: -10°C to +100°C
- RIVETS: BRASS, NICKEL PLTD.
- WIRES: 26 AWG, UL1007, CSA-TR-64, 300V, 80°C
- SPRING: SPRING STEEL, NICKEL PLTD.
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
- ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 6-32 MACHINE SCREWS.
ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 4 "D" CELL HOLDER WITH WIRE LEADS		
Fractional ± .8 (.030)		Date 05/05/17	Drawing Number BH14DW
Angular ± 3°			