



SPECIFICATION: CBL-C58ES-XX-AM


Description: CAT.5E, STRANDED, SHIELDED, 4PR, 24AWG, PVC
Length Per Reel: 1000 feet
UL File No.: E213738
UL Specification: CMR
Flame Test: FT4
Other Standards: ANSI/TIA-568-C.2, ISO/IEC 11801, UL444
Compliances: RoHS and REACH
Conductors: Bare Copper, Stranded 24 AWG (7/0.193mm)
Insulation: HD-PE. Diameter 1.05 ± 0.03mm
Shielding: Mylar, AL Foil and Drain Wire
Jacket: CMR-PVC. Diameter 6.0 ± 0.3mm

ELECTRICAL CHARACTERISTICS

Temperature Rating: -20°C - 75°C
Spark Test: 2000 ± 250 VOC
Dielectric Strength: AC-750V/1 sec. MIN
Insulation Resistance: PE:DC-500V 1500MΩ / 100M MIN at 20°C
Mutual Capacitance: 5600pF / 100m MAX
Capacitance Unbalance: 330pF / 100m MAX
Conductor Resistance: MAX 8.76Ω / 100m at 20°C
Resistance Unbalance: 3% Max
Impedance: 100 ± 15Ω

General Cable Marking:

Grandmax E213738-Y 24AWG 4PR STRANDED CMR (UL) C(UL) STP CAT5E FT4 350MHz CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 75°C ROHS REACH COMPLAINT

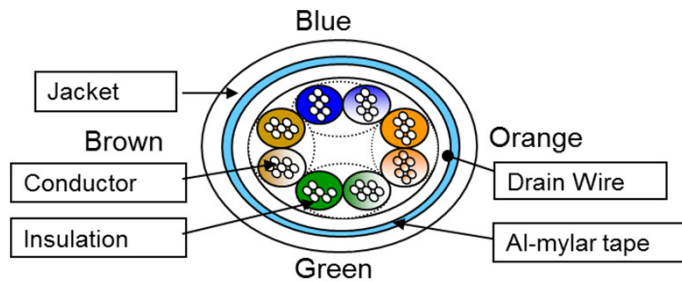

Pair No.	Pair Color Code
1	Blue / White-Blue
2	Orange / White-Orange
3	Green / White-Green
4	Brown / White-Brown

ORDERING PART NUMBER:

CBL - C58E S - XX - AM
 1 2 3 4

1. CBL: Bulk Cable
2. C58E: CAT.5e Stranded Series
3. S: Shielded Cable
4. XX Color: BK (black), GY (gray), PR (violet), RD (red), WT (white), YL (yellow), BL (blue), GN (green), OG (orange), PK (pink)