


## MMK15475K63B06L4BULK

Aliases (F601BL475K063C)

Not for New Design • Recommended Replacement Series R60

MMK/F601, Film, Metallized Polyester, General Purpose, 4.7 uF, 10%, 63 VDC, 85°C, Lead Spacing = 15mm

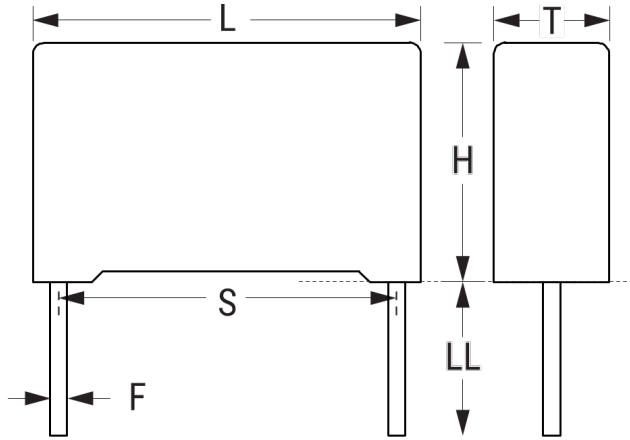

Click [here](#) for the 3D model.

### Dimensions

L	18mm MAX
H	14.5mm MAX
T	7.5mm MAX
S	15mm +/-0.4mm
LL	5mm NOM
F	0.8mm NOM

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	800

### General Information

Series	MMK/F601
Dielectric	Metallized Polyester
Style	Radial
Features	DC Multipurpose Applications
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Component Weight	2.699 g
Notes	Not for new design - the replacement series is: R60.

### Specifications

Capacitance	4.7 uF
Capacitance Tolerance	10%
Voltage AC	40 VAC
Voltage DC	63 VDC, 48.8 VDC (100C)
Temperature Range	-55/+100°C
Rated Temperature	85°C
Dissipation Factor	1% 1kHz
Insulation Resistance	1.0638 GOhms
Max dV/dt	5 V/us
Inductance	6 nH