

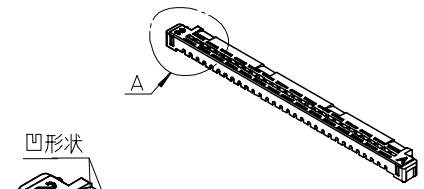
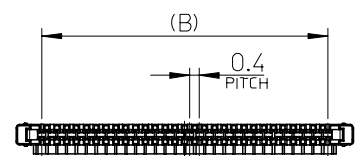




部品 PART NAME	材質/仕上げ MATERIAL/FINISH
ロケータハウジング LOCATOR HOUSING	ガラス入り耐熱樹脂、黒色、UL94V-0 G.F. HEAT RESISTANT PLASTIC BLACK, UL94V-0

注記
NOTES

- 1. 図は30極を示す
DRAWING SHOWS 30CKT.
- △ 50極は凹形状なし



DETAIL A
Scale 10:1

19.6	21.7	501050-5009	50
15.6	17.7	501050-4009	40
B	A	製品番号 MATERIAL NO.	極数 CKT.

REVISED EC NO: J2007-1019 DRWN: DYORFUJI 2006/10/06 CHKD: TKANEKO 2006/10/06 APPR: TKANEKO 2006/10/10	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 5:1	DESIGN UNITS METRIC	◎ THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	10 UNDER	± 0.2	DIMENSION STYLE MM ONLY		TITLE 400UM WIRE TO BOARD CONN. PLUG LOCATOR HOUSING -LEAD FREE-		
	10 ^{OVER} 30 UNDER	± 0.25	DRAWN BY RTAKEUCHI	DATE 2004/10/07	MOLEX INCORPORATED		
	30 ^{OVER}	± 0.3	CHECKED BY TKANEKO	DATE 2004/10/07	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-501050-001	SHEET NO. 1 OF 1
	ANGULAR	± 3 °	APPROVED BY AHORINO	DATE 2004/10/07	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
C	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					