


HC-B 48-TFL-96/O1STM40G

Order No.: 1647310

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647310>

HEAVYCON sleeve housing B48, for single locking latch, height 96 mm, with thread 1x M40, straight conductor exit

Commercial data

GTIN (EAN)	
sales group	D002
Pack	1 pcs.
Customs tariff	85389099
Catalog page information	Page 506 (PC-2009)

Product notesWEEE/RoHS-compliant since:
03/01/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data**General data**

Note	For contact inserts HC-B48, DD216, M
Design	B48
Height	96 mm
Width	89 mm
Length	131.5 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Straight
Type of the screw connection	1x M40
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

Diagrams/Drawings

Dimensioned drawing

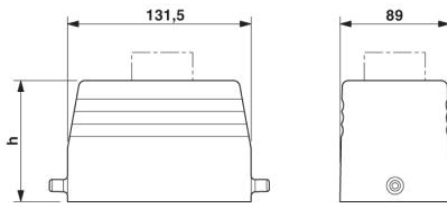

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;