



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-22-136185	18APR2022	JZ	WKH

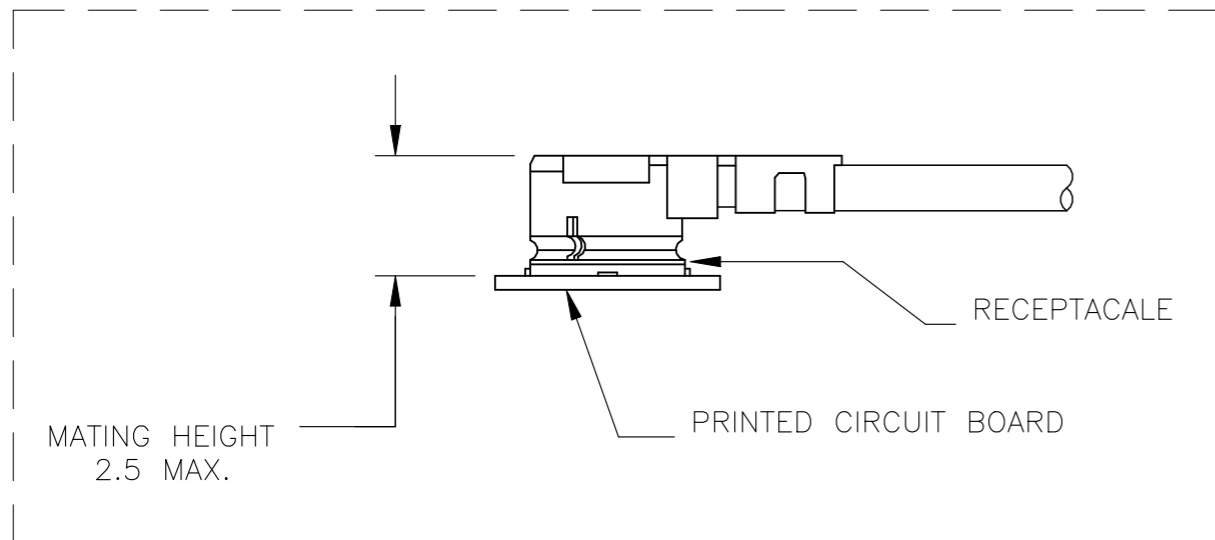

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
- 2 HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT.
UMCC CONNECTOR GEN1.
FREQUENCY RANGE: 0-9GHz
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY.
- 4 H.S.T WILL BE 15REF FOR -2
- 5 CABLE RETENTION FORCE 4N MAX.

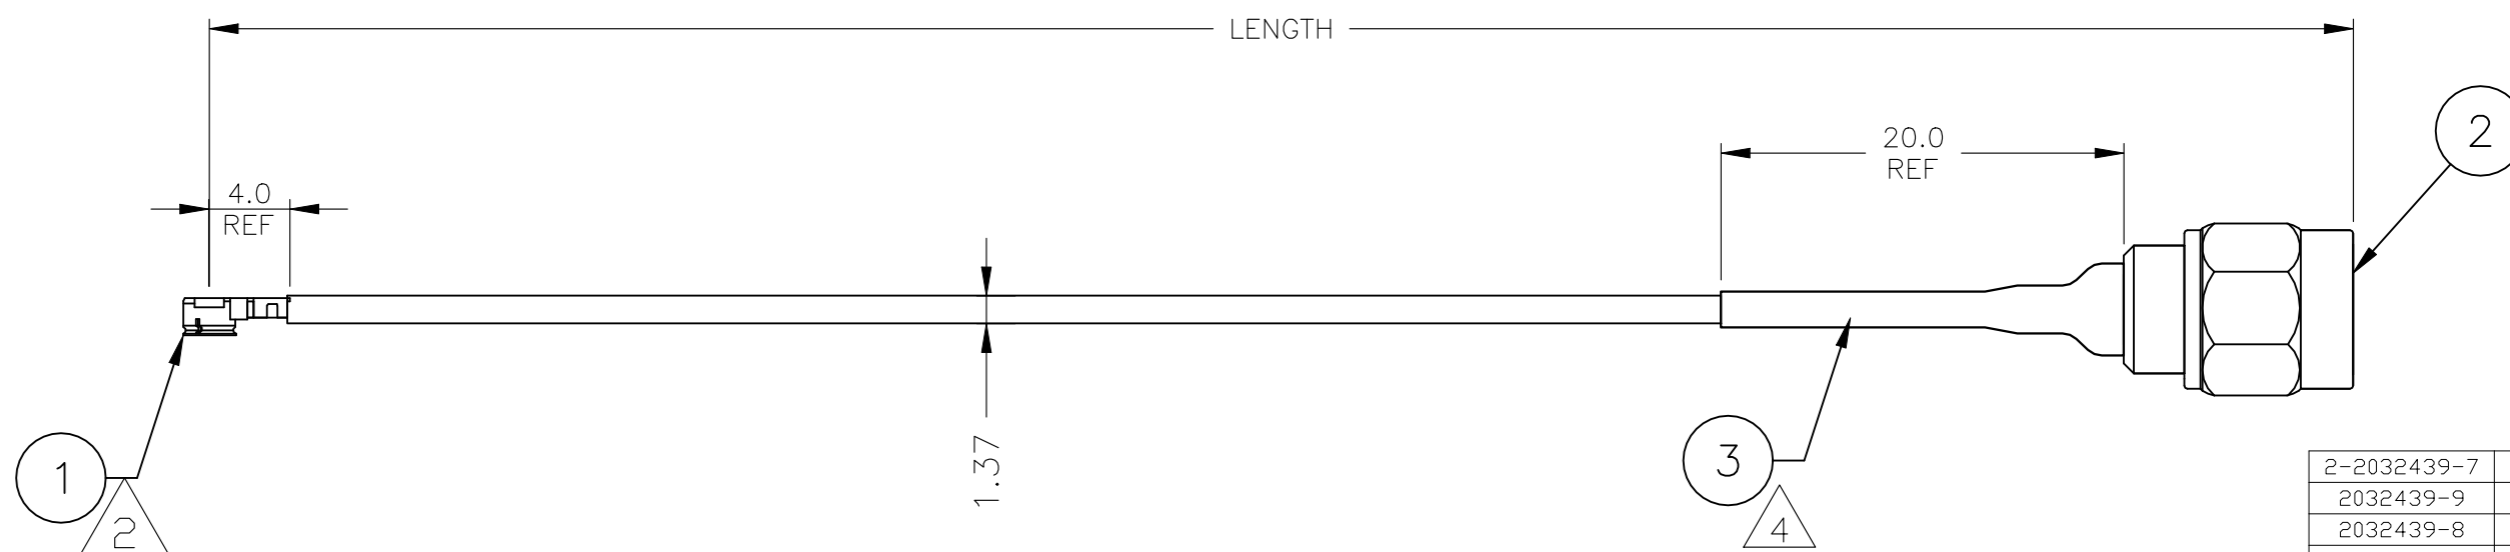

2-2032439-7	2743±15
2032439-9	500±4
2032439-8	450±4
2032439-7	350±3
2032439-6	300±3
2032439-5	250±3
2032439-4	150±3
2032439-3	100±3
2032439-2	50±2
2032439-1	200±3
PART NUMBER	LENGTH

1	PC	TUBING, ADHESIVE HEAT SHRINK	3
1	PC	SMA, PLUG	2
1	PC	UMCC GEN1 PLUG WITH 1.37 CABLE	1
Q'TY	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH 04/DEC/07	TE Connectivity CABLE ASSY, RF, UMCC GEN1 PLUG TO SMA PLUG [1.37mm CABLE]											
DIMENSIONS: mm [INCHES]		CHK J. ORNER 04/DEC/07												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ORNER 04/DEC/07												
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC			± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES
0 PLC	± -													
1 PLC	± -													
2 PLC	± -													
3 PLC	± -													
4 PLC	± -													
ANGLES	± -													
MATERIAL		FINISH	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO							
-		-	-	0.000000	A300779	C-2032439	-							
CUSTOMER DRAWING			SCALE	SHEET	REV									
			N.T.S.	1 OF 1	B1									