



.XX ±0.13 .XXX ±0.05 DO NOT MAKE MANUAL REVISIONS TO MASTER.



| ISSUE NUMBER | |
|--------------|--|
| ORIGINAL | |

(1)

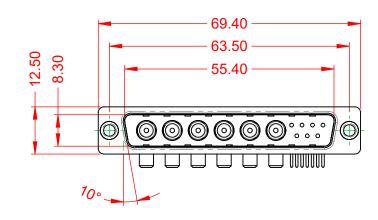




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



40A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

-55°C ~ 125°C

1000V AC rms



| | COMBINATION D-SUB | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | |
|----------------|-------------------|---|--------------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | CHECKED: | DATE: | |
| S TO | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| TIVES ANCY. | | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-13W6250-411 | | ISSUE |
| | | | PART NUMBER: 629-13W | 6250-4T1 | 1 |



THIS SERIES FULLY CONFORMS THE EUROPEAN UNION DIRECTI 2011/65/EU FOR RoHS COMPLIAN

