




Quality Products. Service Excellence.

# Twin Thermostats SKTD Series

## Features



- Designed to provide air temperature control and monitoring in cabinets
- Twin thermostats integrates two independently switchable thermostats, unlike thermostat with changeover contacts, connected devices can be switched in different temperature ranges.
- Available with N.C/N.O., N.C/N.C., N.O/N.O.

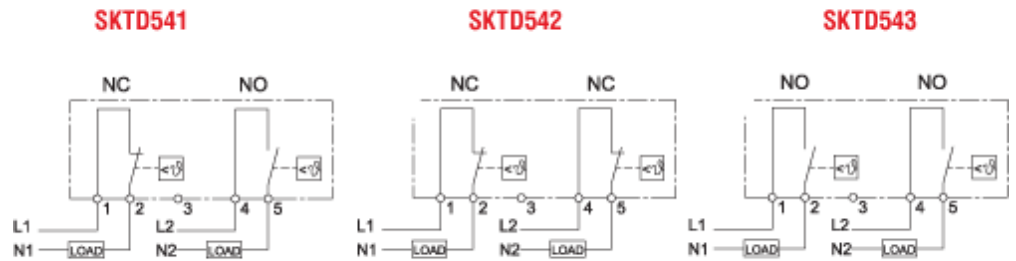

|                               | Part Number  |                                 |                                 |
|-------------------------------|--|---------------------------------|---------------------------------|
| Scale: ( Fahrenheit)          | SKTD541  | SKTD542                         | SKTD543                         |
| Scale: (Celsius)              | SKTD541C   | SKTD542C                        | SKTD543C                        |
| Type of contact:              | N.C. / N.O. with spring contact                            | N.C. / N.C. with spring contact | N.O. / N.O. with spring contact |
| Suitable for the operation of | Fan and Heater   | Heaters and Alarms              | Fans and Alarms                 |
| Switching tolerance:          | + - 4K   |                                 |                                 |
| Switching Capacity:           | N.C. 240 VAC /10A N.O. 120 VAC / 15 A DC max 30watts       |                                 |                                 |
| Adjustment Range:             | 32-140° F / 0-60° C  |                                 |                                 |
| Connection:                   | Screw terminal for AWG 14 / (2.5mm <sup>2</sup> )          |                                 |                                 |
| Mounting:                     | Clip mounting on 35 mm DIN rails                           |                                 |                                 |
| Dimension                     | Height 3.17" (80.5mm) Width 2.32" (59mm) Depth 1.5" (38mm) |                                 |                                 |
| Housing:                      | Flame retardant plastic UL94VO                             |                                 |                                 |
| Color:                        | Light Gray RAL7035   |                                 |                                 |
| Protection:                   | IP20   |                                 |                                 |
| Approval:                     | UL Recognized Component, cUL Recognized Component, CE      |                                 |                                 |

Data subject to change without notice

