

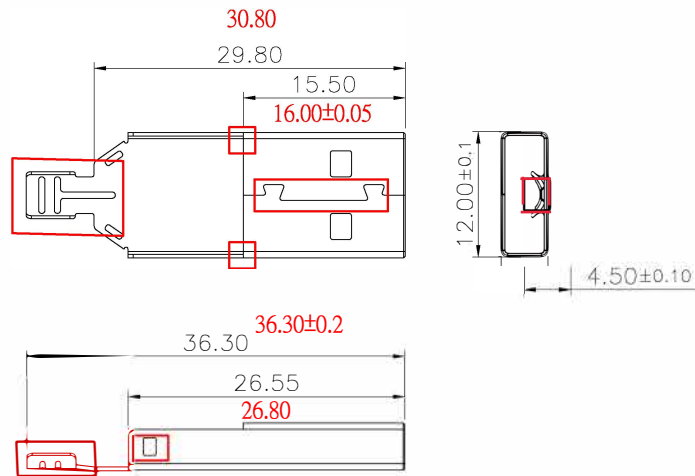



Insulator different shape

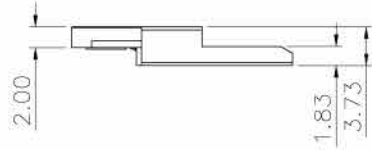

Specifications: **1.5A**
 Current Rating: 2.0A AC,DC
 Voltage Rating: 30V AC,DC
 Contact Resistance: 30m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -25°C ~ +85°C

Material:
 Insulator: PBT(UL94V-0)
 Insulator Color: White
 Contact: Brass
 Plated: 30u" Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell: SPCC With Nickel Plated

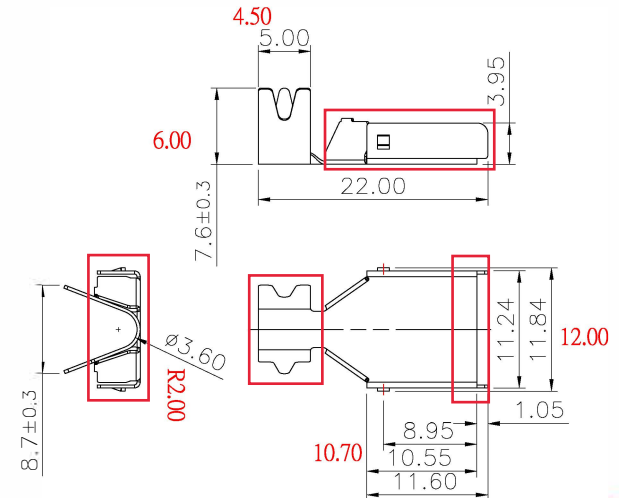

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20	<h1 style="text-align: center; color: red;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED:	UNIT: MM			DESCRIPTION:
					SCALE:	USB A Solder Type, 30u"		A4
A	17-MAY-2021			APPROVAL:	SHEET: 1 / 1			
REV	DATE	FILE	BY		PROJECTION:	1002-024-01300		