


## Coaxial Cable Connector 21\_SMA-50-3-18/111\_Y

### Description

Straight cable jack

Interface standards

IEC 60169-15\_MIL-STD-348A/310\_CECC 22110

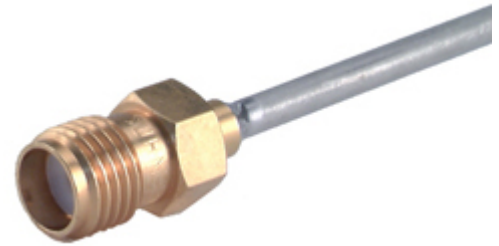

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$
Interface frequency max.	18 GHz

#### Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.002 kg

#### Environmental Data

Operating temperature	-65 °C to 165 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

#### Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer contact	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	

### Related Documents

Outline drawing	DOU-00047115
Assembly instruction	DOC-0000179086

### Ordering Information

Bulk 100 pcs package	21_SMA-50-3-18/111_YH
----------------------	-----------------------

### Additional Information

Suitable cables	EZ_141_TP_M17, SUCOFORM_141, MULTIFLEX_141
-----------------	--