
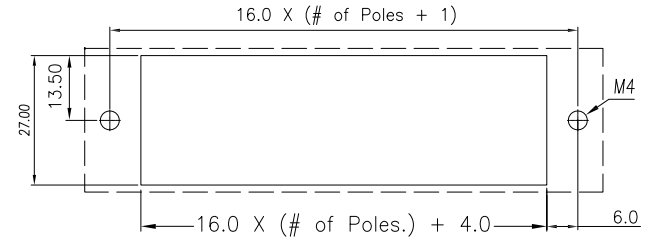





6 5 4 3 2 1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/18	

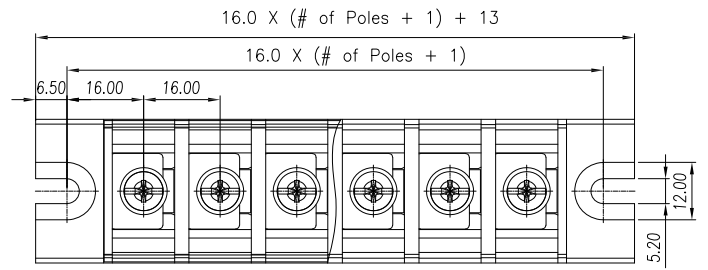

RECOMMENDED MOUNTING CUT-OUT

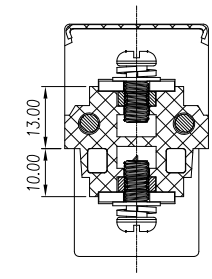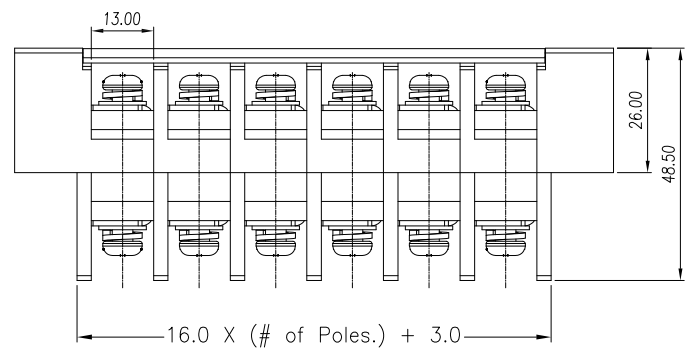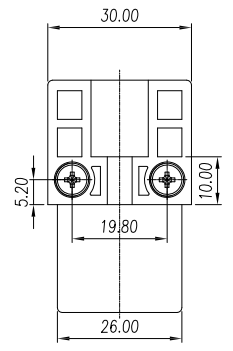

Poles: 01 thru 15

SPECIFICATIONS:
 Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin plated
 Screw: M5 Steel, Nickel plated
 Electrical:
 Voltage rating: 600 V
 Current rating: 65 A
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms / DC500V
 Dielectric withstanding voltage: 2,500 VAC for 1 minute
 Mechanical:
 Wire Range: 14~6 AWG
 Torque: 2.5Nm/25.0lb.in
 Temperature Rating:
 -40°C to +130°C
 Environmental:
 Lead free, RoHS compliant.



linear dimension (Tolerances Standard)								—	∕	⊥
variable		over	over	over	over	over	over		over	over
range	to	6	10	30	60	100	160	to	10	100
	to	10	30	60	100	160	to	100	to	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
SEE CHART		INTERCONNECTS			
APPROVALS		DATE		TITLE	
DRAWN	AY	11/26/18		TERMINAL BLOCK, .630 [16.00] PITCH W/ CLEAR COVER	
CHECKED	AC	11/26/18		SIZE	PART NO.
APPROVED				X	TBU-XX-W3-CC
REF: S00067C		SCALE: NTS		REV. -	
				SHEET 1 OF 1	

6 5 4 3 2 1