



Your Durable Print-From-Everywhere Solution

BradyPrinter M611 Mobile Printer with
Brady Workstation Mobile or Desktop Software

Your Durable Print-From-Everywhere Solution

With more and more work being completed outside of the traditional office setting, having the right tools on hand is becoming more important. And, advancements in mobile technology are making mobile devices a bigger part of everyday personal and professional life. With the BradyPrinter M611 Mobile Printer, powered by Brady Workstation Software, you can combine the convenience of your mobile device with the dependable printing capabilities of a Brady printer. This complete solution provides you with a variety of time- and labor-saving advantages, including:


- **Print-from-everywhere capabilities:** Whether you're in the office or in the field, you can easily get your data and keep on printing
- **Fast-to-label software:** Create and edit labels in the field with the Brady Workstation Express Labels Mobile App so you can complete the job right the first time
- **On-the-job durability:** Keep printing all day with the long-lasting battery and rugged design
- **Industry-tested materials:** Complete your identification jobs with materials that last

This printer is ideal for use in a variety of applications, including:

- Information Communication Technology (ICT) or Datacomm
- Laboratory
- Manufacturing
- Asset tracking
- General labeling
- And more!

▶ **BradyPrinter M611 requires Brady Workstation Mobile or Desktop software**

The complete BradyPrinter M611 solution



BradyPrinter M611 Mobile Printer Solution and Brady Workstation Express Labels Mobile App

Page 3



BradyPrinter M611 Mobile Printer

Page 4



Labels and ribbons

Pages 5-25



Printer and accessories

Page 26




Printer technical specifications

Page 27

Keep printing everywhere


Forget the days of wasting time driving back and forth between the office and the jobsite to get new labels for every identification project. The complete BradyPrinter M611 Mobile Printer and Brady Workstation Software solution bridges the printing gap between the office and the field. With this combination of mobile software and mobile print connectivity, you get the freedom to push data from the office to the field so your field engineers have everything they need to complete the task at hand. After the job is complete, rely on the high-performance of Brady materials to provide long-lasting identification.

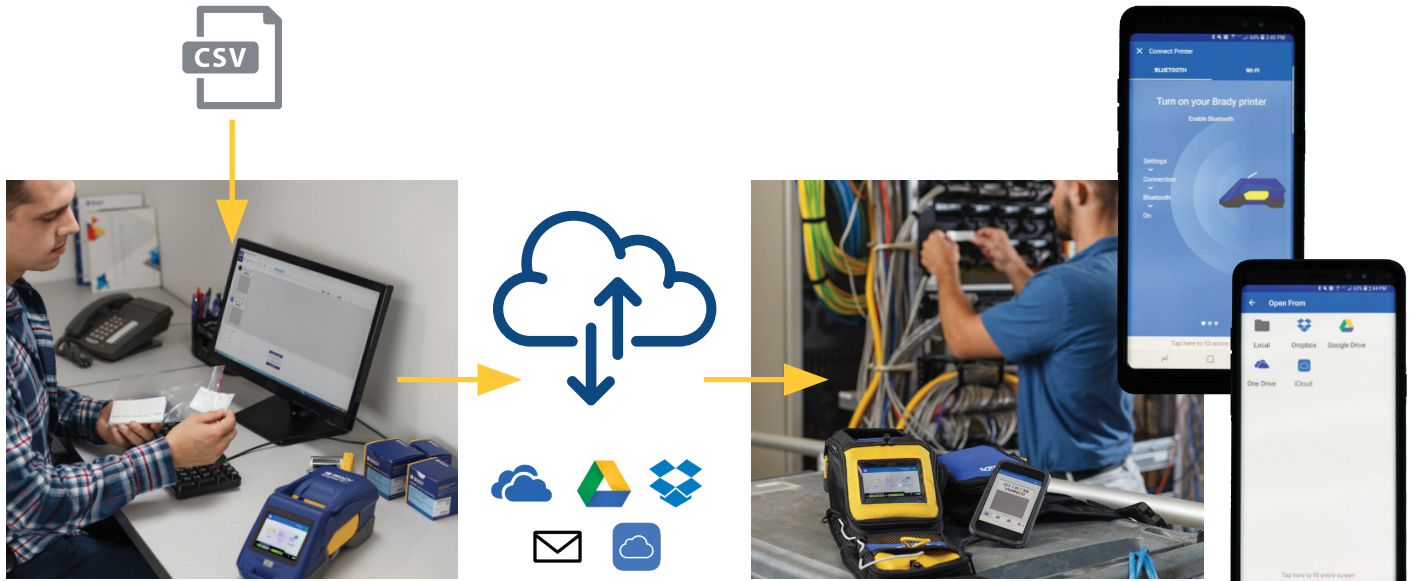

Label file created in the office

Labels pushed to the cloud

Labels printed in the field

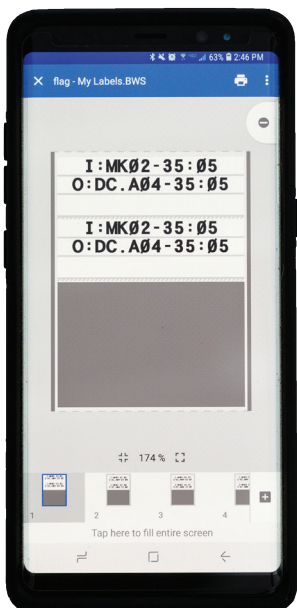

Your one-stop shop for mobile printing

The Brady Workstation Express Labels Mobile App makes mobile printing convenient and simple. This intuitively designed software integrates touchscreen technology for fast and easy label creation, including label resizing using touch and a native keyboard for more natural typing. To make label creation even more convenient, the app features auto-save capabilities, tools to help you easily enter data onto your label, and easy-to-use editing tools to keep labeling projects moving smoothly.

Durable in design

The BradyPrinter M611 Mobile Printer is designed to keep you printing whether you're in the field or in the office. This industrial mid-volume printer withstands harsh conditions in the field and the compact design means that you can easily print in cluttered or cramped areas. And, the internal lithium ion battery keeps you running for long days on the job. There's no need to slow down your work if your phone battery dies; you can easily charge it in a pinch. With Bluetooth and Wi-Fi connectivity, as well as a variety of network connectivity options, this printer can get data any way you need it to.



The right label from the right company


Nothing leaves Brady's doors without meeting the highest quality standards. Backed by more than 100 years of identification experience and rigorous R&D testing, Brady manufactures materials you can trust.

The BradyPrinter M611 Mobile Printer materials provide smart-cell print technology so you can move through your work faster. This technology allows the printer, labels and software to work together for efficient label setup. It's all in the smart chip embedded in our materials – it stores the material size, type, color, quantity and compatibility, and sets proper burn settings and print speed. When installed, the chip sends that information to the printer and software and displays it on-screen to provide a variety of time- and cost-saving benefits, including:

- Decreased setup time
- Reduced label errors
- Compliant label creation
- Reduced material waste




Fiber-Optic Cable Markers

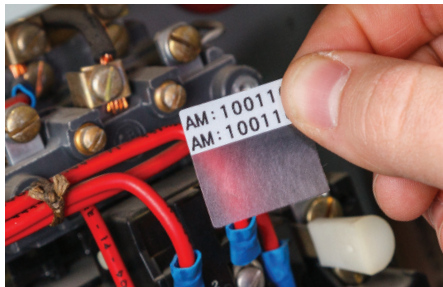

Self-Laminating Labels




Cable Tags

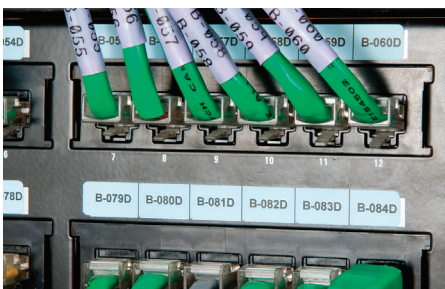

Patch Panel Labels



Control Panel Labels

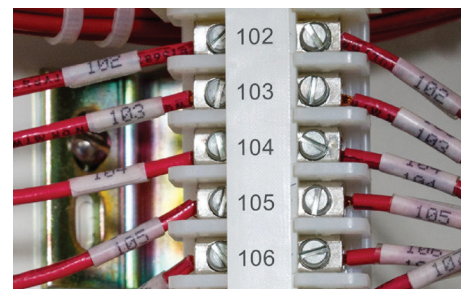

Terminal Block Labels



Circuit Board Identification



Lab Vial Labels




Safety Labels

Wire and cable materials

Self-Laminating Vinyl Wire and Cable Markers (B-427)

Feature a clear, non-printable area that wraps around wires and cables to serve as an overlaminate. Protected print area offers superior resistance to abrasion, solvents, oil, grease, dirt and water. These markers are designed to adhere to the highly curved surfaces of wires and cables.

- **B-427 Self-Laminating Vinyl Material:** Resistant to abrasion, solvents, oil, grease, dirt and water. Temp range -40°F to 158°F (-40°C to 70°C), UL recognized.

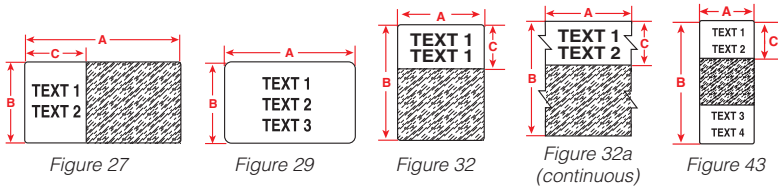

| Diagram | Catalog # | B# | Material | Color | Approx. Wire Gauge | Label Width A Inch (mm) | Label Height B Inch (mm) | Printable Area C Inch (mm) | Labels Per Roll | Rec. Ribbon |
|------------------------------------|----------------|-------|----------|--------|--------------------|-------------------------|--------------------------|----------------------------|-----------------|-------------|
| B-427 Self-Laminating Vinyl | | | | | | | | | | |
| Fig. 29 | PTL-105-427-AW | B-427 | Vinyl | White | All White | 1.100 (27.9) | 0.250 (6.4) | 1.100 (27.9) | 750 | M61-R4310 |
| Fig. 27 | PTL-74-427 | B-427 | Vinyl | White | Cables | 2.200 (55.88) | 0.500 (12.7) | 0.500 (12.7) | 100 | M61-R4310 |
| Fig. 32 | PTL-10-427 | B-427 | Vinyl | White | 16 to 10 | 0.250 (6.35) | 0.750 (19.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-11-427 | B-427 | Vinyl | White | 16 to 10 | 0.500 (12.7) | 0.750 (19.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-96-427 | B-427 | Vinyl | White | 16 to 10 | 1.000 (25.4) | 0.750 (19.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-30-427-AW | B-427 | Vinyl | White | All White | 1.500 (38.1) | 0.750 (19.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-17-427 | B-427 | Vinyl | White | 12 to 10 | 0.500 (12.7) | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-18-427 | B-427 | Vinyl | White | 10 to 4 | 0.750 (19.05) | 1.000 (25.4) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-19-427 | B-427 | Vinyl | White | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-104-427 | B-427 | Vinyl | White | 12 to 10 | 1.500 (38.1) | 1.000 (25.4) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-87-427 | B-427 | Vinyl | White | 12 to 10 | 1.750 (44.45) | 1.000 (25.4) | 1.750 (44.5) | 250 | M61-R4310 |
| Fig. 32 | PTL-78-427-AW | B-427 | Vinyl | White | All White | 1.900 (48.26) | 1.000 (25.4) | 1.900 (48.2) | 250 | M61-R4310 |
| Fig. 32 | PTL-102-427 | B-427 | Vinyl | White | 10 to 4 | 0.500 (12.7) | 1.250 (31.8) | 0.500 (12.7) | 250 | M61-R4310 |
| Fig. 32 | PTL-103-427 | B-427 | Vinyl | White | 10 to 4 | 1.000 (25.4) | 1.250 (31.8) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427 | B-427 | Vinyl | White | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427 | B-427 | Vinyl | White | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427 | B-427 | Vinyl | White | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427 | B-427 | Vinyl | White | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427 | B-427 | Vinyl | White | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-88-427 | B-427 | Vinyl | White | 10 to 4 | 1.750 (44.45) | 1.500 (38.1) | 1.750 (44.5) | 250 | M61-R4310 |
| Fig. 32 | PTL-107-427 | B-427 | Vinyl | White | 10 to 4 | 2.000 (50.8) | 1.500 (38.1) | 2.000 (50.8) | 100 | M61-R4310 |
| Fig. 32 | PTL-21-427 | B-427 | Vinyl | White | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-157-427 | B-427 | Vinyl | White | Cables | 1.500 (38.1) | 2.500 (63.5) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-75-427 | B-427 | Vinyl | White | Cables | 1.000 (25.4) | 2.625 (66.68) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-66-427 | B-427 | Vinyl | White | Cables | 1.938 (49.23) | 3.150 (80) | 1.938 (49.2) | 100 | M61-R4310 |
| Fig. 43 | PTL-64-427 | B-427 | Vinyl | White | Cables | 1.000 (25.4) | 3.375 (85.7) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427 | B-427 | Vinyl | White | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427 | B-427 | Vinyl | White | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-109-427 | B-427 | Vinyl | White | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427 | B-427 | Vinyl | White | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32a | PTL-106-427 | B-427 | Vinyl | White | — | 1.500 (38.1) | 50 ft (15.24 m) | — | 1 roll (cont.) | M61-R4310 |
| Fig. 32 | PTL-10-427-YL | B-427 | Vinyl | Yellow | 16 to 10 | 0.250 (6.35) | 0.750 (19.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-11-427-YL | B-427 | Vinyl | Yellow | 16 to 10 | 0.500 (12.7) | 0.750 (19.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-17-427-YL | B-427 | Vinyl | Yellow | 12 to 10 | 0.500 (12.7) | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-18-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 0.750 (19.05) | 1.000 (25.4) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-19-427-YL | B-427 | Vinyl | Yellow | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-YL | B-427 | Vinyl | Yellow | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-YL | B-427 | Vinyl | Yellow | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-YL | B-427 | Vinyl | Yellow | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-YL | B-427 | Vinyl | Yellow | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-YL | B-427 | Vinyl | Yellow | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-RD | B-427 | Vinyl | Red | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-RD | B-427 | Vinyl | Red | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-RD | B-427 | Vinyl | Red | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-RD | B-427 | Vinyl | Red | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-RD | B-427 | Vinyl | Red | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-RD | B-427 | Vinyl | Red | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-RD | B-427 | Vinyl | Red | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |

Self-Laminating Labels continue on next page.

Wire and cable materials




Figure 32

Self-Laminating Vinyl Wire and Cable Markers (cont.)

| Diagram | Catalog # | B# | Material | Color | Approx. Wire Gauge | Label Width A Inch (mm) | Label Height B Inch (mm) | Printable Area C Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------|---------------|-------|----------|--------|--------------------|-------------------------|--------------------------|----------------------------|-----------------|-------------|
| Fig. 32 | PTL-23-427-RD | B-427 | Vinyl | Red | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-RD | B-427 | Vinyl | Red | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-RD | B-427 | Vinyl | Red | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-GR | B-427 | Vinyl | Green | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-GR | B-427 | Vinyl | Green | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-GR | B-427 | Vinyl | Green | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-GR | B-427 | Vinyl | Green | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-GR | B-427 | Vinyl | Green | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-GR | B-427 | Vinyl | Green | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-GR | B-427 | Vinyl | Green | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-GR | B-427 | Vinyl | Green | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-GR | B-427 | Vinyl | Green | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-GR | B-427 | Vinyl | Green | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-OR | B-427 | Vinyl | Orange | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-OR | B-427 | Vinyl | Orange | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-OR | B-427 | Vinyl | Orange | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-OR | B-427 | Vinyl | Orange | 10 to 4 | 0.750 (19.1) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-OR | B-427 | Vinyl | Orange | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-OR | B-427 | Vinyl | Orange | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-OR | B-427 | Vinyl | Orange | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-OR | B-427 | Vinyl | Orange | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-OR | B-427 | Vinyl | Orange | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-OR | B-427 | Vinyl | Orange | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-BL | B-427 | Vinyl | Blue | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-BL | B-427 | Vinyl | Blue | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-BL | B-427 | Vinyl | Blue | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-BL | B-427 | Vinyl | Blue | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-BL | B-427 | Vinyl | Blue | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-BL | B-427 | Vinyl | Blue | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-BL | B-427 | Vinyl | Blue | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-BL | B-427 | Vinyl | Blue | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-BL | B-427 | Vinyl | Blue | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-BL | B-427 | Vinyl | Blue | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-PL | B-427 | Vinyl | Purple | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-PL | B-427 | Vinyl | Purple | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-PL | B-427 | Vinyl | Purple | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-PL | B-427 | Vinyl | Purple | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-PL | B-427 | Vinyl | Purple | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-PL | B-427 | Vinyl | Purple | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-PL | B-427 | Vinyl | Purple | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-PL | B-427 | Vinyl | Purple | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-PL | B-427 | Vinyl | Purple | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-PL | B-427 | Vinyl | Purple | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-BR | B-427 | Vinyl | Brown | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-BR | B-427 | Vinyl | Brown | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-BR | B-427 | Vinyl | Brown | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-BR | B-427 | Vinyl | Brown | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-BR | B-427 | Vinyl | Brown | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-BR | B-427 | Vinyl | Brown | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-BR | B-427 | Vinyl | Brown | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-BR | B-427 | Vinyl | Brown | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-BR | B-427 | Vinyl | Brown | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-BR | B-427 | Vinyl | Brown | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |
| Fig. 32 | PTL-19-427-GY | B-427 | Vinyl | Gray | 12 to 10 | 1.000 (25.4) | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-28-427-GY | B-427 | Vinyl | Gray | 10 to 4 | 0.250 (6.35) | 1.500 (38.1) | 0.250 (6.35) | 750 | M61-R4310 |
| Fig. 32 | PTL-29-427-GY | B-427 | Vinyl | Gray | 10 to 4 | 0.500 (12.7) | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 32 | PTL-30-427-GY | B-427 | Vinyl | Gray | 10 to 4 | 0.750 (19.05) | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-427-GY | B-427 | Vinyl | Gray | 10 to 4 | 1.000 (25.4) | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 32 | PTL-32-427-GY | B-427 | Vinyl | Gray | 10 to 4 | 1.500 (38.1) | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-427-GY | B-427 | Vinyl | Gray | Cables | 1.000 (25.4) | 2.500 (63.5) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-23-427-GY | B-427 | Vinyl | Gray | Cables | 1.000 (25.4) | 4.000 (101.6) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 32 | PTL-33-427-GY | B-427 | Vinyl | Gray | Cables | 1.500 (38.1) | 4.000 (101.6) | 1.500 (38.1) | 100 | M61-R4310 |
| Fig. 32 | PTL-34-427-GY | B-427 | Vinyl | Gray | Cables | 1.500 (38.1) | 6.000 (152.4) | 1.500 (38.1) | 50 | M61-R4310 |

Wire and cable materials


Self-laminating label heights

If you know your wire diameter or wire circumference, you can easily determine the correct label height by using the formula below:

Step 1: wire dia.
 $\times 3.147 (\pi)$
 wire circumference

Step 2: wire circumference
 $\times 1.5$
 total label length

(Multiplying by 1.5 allows the label to wrap around the wire 1.5 times)

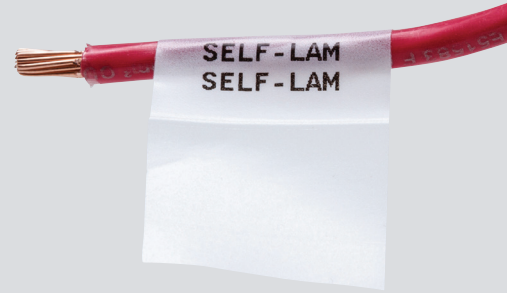

Tag Materials (B-109 and B-412)

• B-109 Non-Adhesive Polyethylene Tags:

Multi-purpose tags for identifying multi-conductor cables. Good weatherability and legibility after solvent exposure.

• B-412 Non-Adhesive Polypropylene Tags:

Thick polypropylene material for hardware identification. High print legibility and high tensile strength.




Figure 45




Figure 55



Figure 28




Figure 56



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|------------|-------|---------------|-------|----------------------------|-----------------------------|--------------------|-------------|
| B-109 Non-Adhesive Polyethylene Tag | | | | | | | | |
| Fig. 56 | PTL-12-109 | B-109 | Polyethylene | White | 0.750 (19.05) | 3.000 (101.6) | 100 | M61-R4310 |
| Fig. 45 | PTL-36-109 | B-109 | Polyethylene | White | 1.750 (44.45) | 1.125 (28.6) | 250 | M61-R4310 |
| B-412 Non-Adhesive Polypropylene Tag | | | | | | | | |
| Fig. 28 | PTL-55-412 | B-412 | Polypropylene | White | 0.230 (5.84) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 28 | PTL-56-412 | B-412 | Polypropylene | White | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 28 | PTL-57-412 | B-412 | Polypropylene | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 28 | PTL-58-412 | B-412 | Polypropylene | White | 0.535 (13.59) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 28 | PTL-59-412 | B-412 | Polypropylene | White | 0.785 (19.94) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 55 | PTL-40-412 | B-412 | Polypropylene | White | 1.938 (49.23) | 0.375 (9.5) | 750 | M61-R4310 |

High Temperature Wire and Cable Labels (B-437)

- **B-437 Polyvinyl fluoride Material:** Polyvinyl fluoride label where high temperature and self-extinguishing features are required. Heavy duty performance with excellent resistance to water, oil and other fluids. Meets MIL-M-87958 Standard. Service temp: -94°F to 275°F (-70°C to 135°C). ROHS compliant.




Figure 29




Figure 33



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|---------------|-------|--------------------|--------|----------------------------|-----------------------------|--------------------|-------------|
| B-437 Self-Extinguishing Polyvinyl fluoride | | | | | | | | |
| Fig. 29 | PTL-9-437 | B-437 | Polyvinyl fluoride | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R4310 |
| Fig. 29 | PTL-10-437 | B-437 | Polyvinyl fluoride | White | 0.750 (19.05) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-15-437 | B-437 | Polyvinyl fluoride | White | 1.000 (25.4) | 0.275 (7) | 750 | M61-R4310 |
| Fig. 29 | PTL-29-437 | B-437 | Polyvinyl fluoride | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 33 | PTL-41-437-WT | B-437 | Polyvinyl fluoride | White | 1.500 (38.1) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 33 | PTL-41-437-YL | B-437 | Polyvinyl fluoride | Yellow | 1.500 (38.1) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |

Wire and cable materials

Vinyl and Nylon Cloth Wire and Cable Labels (B-498, B-499)

- **B-498 Repositionable Vinyl Cloth:** Durable material with special adhesive stays put, but marker can be removed and reapplied if necessary. Temp. range -40°F to 175°F (-40°C to 70°C). UL recognized.
- **B-499 Nylon Cloth Material:** Permanent adhesive. Pliable for rough or smooth surfaces. Temp. range: -94°F to 194°F (-70°C to 90°C). UL recognized.





Figure 29



| Diagram | Catalog # | B# | Material | Color | Approx. Wire Gauge | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|-------------|-------|----------|-------|--------------------|-------------------------|--------------------------|-----------------|-------------|
| B-498 Repositionable Vinyl Cloth | | | | | | | | | |
| Fig. 29 | PTL-7-498 | B-498 | Vinyl | White | 22-16 | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-15-498 | B-498 | Vinyl | White | 22-16 | 1.000 (25.4) | 0.275 (7) | 750 | M61-R4310 |
| Fig. 29 | PTL-10-498 | B-498 | Vinyl | White | 16-10 | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R4310 |
| Fig. 29 | PTL-11-498 | B-498 | Vinyl | White | 16-10 | 0.500 (12.7) | 0.750 (19.1) | 500 | M61-R4310 |
| Fig. 29 | PTL-16-498 | B-498 | Vinyl | White | 12-10 | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R4310 |
| Fig. 29 | PTL-17-498 | B-498 | Vinyl | White | 12-10 | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-19-498 | B-498 | Vinyl | White | 12-10 | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-18-498 | B-498 | Vinyl | White | 10-4 | 0.750 (19.05) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-30-498 | B-498 | Vinyl | White | 10-4 | 0.750 (19.05) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-31-498 | B-498 | Vinyl | White | 10-4 | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-28-498 | B-498 | Vinyl | White | 10-4 | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-29-498 | B-498 | Vinyl | White | 10-4 | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-32-498 | B-498 | Vinyl | White | 10-4 | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-21-498 | B-498 | Vinyl | White | — | 1.000 (25.4) | 2.500 (63.5) | 100 | M61-R4310 |
| Fig. 29 | PTL-23-498 | B-498 | Vinyl | White | — | 1.000 (25.4) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 29 | PTL-33-498 | B-498 | Vinyl | White | — | 1.500 (38.1) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 29 | PTL-34-498 | B-498 | Vinyl | White | — | 1.500 (38.1) | 6.000 (152.4) | 50 | M61-R4310 |
| B-499 Nylon Cloth | | | | | | | | | |
| Fig. 29 | PTL-7-499 | B-499 | Vinyl | White | 22-16 | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-11-499 | B-499 | Vinyl | White | 16-10 | 0.500 (12.7) | 0.750 (19.1) | 500 | M61-R4310 |
| Fig. 29 | PTL-16-499 | B-499 | Vinyl | White | 12-10 | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R4310 |
| Fig. 29 | PTL-19-499 | B-499 | Vinyl | White | 12-10 | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-29-499 | B-499 | Vinyl | White | 10-4 | 0.500 (12.7) | 1.500 (38.1) | 500 | M61-R4310 |
| Fig. 29 | PTL-18-499 | B-499 | Vinyl | White | 10-4 | 0.750 (19.05) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-30-499 | B-499 | Vinyl | White | 10-4 | 0.750 (19.05) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-31-499 | B-499 | Vinyl | White | 10-4 | 1.000 (25.4) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-28-499 | B-499 | Vinyl | White | 10-4 | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-117-499 | B-499 | Vinyl | White | — | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-84-499 | B-499 | Vinyl | White | — | 0.900 (22.86) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-98-499 | B-499 | Vinyl | White | — | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R4310 |
| Fig. 29 | PTL-21-499 | B-499 | Vinyl | White | — | 1.000 (25.4) | 2.500 (63.5) | 100 | M61-R4310 |
| Fig. 29 | PTL-23-499 | B-499 | Vinyl | White | — | 1.000 (25.4) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 29 | PTL-81-499 | B-499 | Vinyl | White | — | 1.900 (48.26) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-78-499 | B-499 | Vinyl | White | — | 1.900 (48.26) | 1.000 (25.4) | 250 | M61-R4310 |

Self-Extinguishing Tedlar® Material (B-642)

- **B-642 Clear Polyvinyl fluoride Film:** A thin tape with a white printable zone and a translucent overlaminating area offers excellent flexibility for wrapping on small diameter wires. The polyvinyl fluoride film provides good self-extinguishing properties and solvent resistance.




Figure 32



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Printer Area C Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|------------|-------|--------------------|-------|-------------------------|--------------------------|--------------------------|-----------------|-------------|
| B-642 Self-Extinguishing Polyvinyl fluoride | | | | | | | | | |
| Fig. 32 | PTL-19-642 | B-642 | Polyvinyl fluoride | White | 1.000 (25.4) | 1.000 (25.4) | 0.375 (9.5) | 250 | M61-R4310 |
| Fig. 32 | PTL-31-642 | B-642 | Polyvinyl fluoride | White | 1.000 (25.4) | 1.500 (38.1) | 0.500 (12.7) | 250 | M61-R4310 |
| Fig. 32 | PTL-21-642 | B-642 | Polyvinyl fluoride | White | 1.000 (25.4) | 2.500 (63.5) | 0.750 (19.1) | 100 | M61-R4310 |

Tedlar is a registered trademark of DuPont.

Wire and cable materials

Polypropylene Flags (B-425 and B-8425)

- **B-425 Polypropylene Solvent Resistant Material:** Matte white polypropylene for printing or write-on. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.
- **B-8425 Polypropylene Solvent Resistant Material:** Glossy white polypropylene for printing. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.




Figure 29




Figure 47




Figure 48





Figure 78



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------------------------------------|---------------|--------|---------------|-------|-------------------------|--------------------------|-----------------|-------------|
| B-425 Permanent Polypropylene | | | | | | | | |
| Fig. 48 | PTLTF-01-425 | B-425 | Polypropylene | White | 1.180 (29.97) | 0.788 (20) | 250 | M61-R6210 |
| Fig. 47 | PTLFP-01-425 | B-425 | Polypropylene | White | 1.180 (29.97) | 0.788 (20) | 250 | M61-R6210 |
| Fig. 78 | PTLTF-54-425 | B-425 | Polypropylene | White | 1.490 (37.85) | 1.575 (40) | 100 | M61-R6210 |
| Fig. 78 | PTLFP-02-425 | B-425 | Polypropylene | White | 1.750 (44.45) | 1.000 (25.4) | 100 | M61-R6210 |
| B-8425 Permanent Polypropylene | | | | | | | | |
| Fig. 29 | PTL-10-8425 | B-8425 | Polypropylene | White | 0.750 (19.05) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 47 | PTLFP-01-8425 | B-8425 | Polypropylene | White | 1.180 (29.97) | 0.788 (20) | 250 | M61-R6010 |
| Fig. 48 | PTLTF-01-8425 | B-8425 | Polypropylene | White | 1.180 (29.97) | 0.788 (20) | 250 | M61-R6010 |

Tag Material (B-145 and B-145FR)

- **B-145 and B-145FR Fire Retardant Polyethylene Material:** Non-adhesive tag material for identifying multi-conductor cable, inventory, equipment, lockout, safety warning repair and work in progress. B-145FR features fire retardant properties.




Figure 50a



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|-------------------|---------|--------------|-------|-------------------------|--------------------------|-----------------|-------------|
| B-145 Polyethylene Tag Material | | | | | | | | |
| Fig. 50a | M61-144-145-GY | B-145 | Polyethylene | Gray | 0.758 (19.3) | 1.206 (30.63) | 100 | M61-R6010 |
| Fig. 50a | BM61-144-145-GY | B-145 | Polyethylene | Gray | 0.758 (19.3) | 1.206 (30.63) | 1000 | M61-R6010 |
| Fig. 50a | M61-145-145-GY | B-145 | Polyethylene | Gray | 1.000 (25.4) | 1.750 (44.45) | 100 | M61-R6010 |
| Fig. 50a | BM61-145-145-GY | B-145 | Polyethylene | Gray | 1.000 (25.4) | 1.750 (44.45) | 1000 | M61-R6010 |
| B-145FR Flame Retardant Polyethylene Tag Material | | | | | | | | |
| Fig. 50a | M61-144-145FR-GY | B-145FR | Polyethylene | Gray | 0.758 (19.3) | 1.206 (30.63) | 100 | M61-R6010 |
| Fig. 50a | BM61-144-145FR-GY | B-145FR | Polyethylene | Gray | 0.758 (19.3) | 1.206 (30.63) | 1000 | M61-R6010 |
| Fig. 50a | M61-145-145FR-GY | B-145FR | Polyethylene | Gray | 1.000 (25.4) | 1.750 (44.45) | 100 | M61-R6010 |
| Fig. 50a | BM61-145-145FR-GY | B-145FR | Polyethylene | Gray | 1.000 (25.4) | 1.750 (44.45) | 1000 | M61-R6010 |

BradySleeve™ Wire Markers (B-321)

- **B-321 BradySleeve™ Heat-Shrink Polyolefin:** Dot matrix printable wire and cable heat-shrinkable sleeve. Excellent resistance to oil and solvents.




Figure 36



| Diagram | Catalog # | B# | Material | Color | Approx. Wire Gauge | Minimum Wire Dia. Inch (mm) | Maximum Wire Dia. Inch (mm) | Diameter as Supplied B Inch (mm) | Sleeve Width A Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|-------------------|-------|------------|-------|--------------------|-----------------------------|-----------------------------|----------------------------------|--------------------------|-----------------|-------------|
| B-321 BradySleeve™ Heat-Shrink Polyolefin | | | | | | | | | | | |
| Fig. 36 | PTS-0.45-350-321 | B-321 | Polyolefin | White | 16-10 | 0.075 (1.91) | 0.160 (4.06) | 0.450 (11.43) | 0.350 (8.9) | 500 | M61-R6210 |
| Fig. 36 | PTS-0.95-350-321 | B-321 | Polyolefin | White | 16-10 | 0.075 (1.91) | 0.160 (4.06) | 0.950 (24.13) | 0.350 (8.9) | 500 | M61-R6210 |
| Fig. 36 | PTS-1.90-350-321 | B-321 | Polyolefin | White | 16-10 | 0.075 (1.91) | 0.160 (4.06) | 1.900 (48.26) | 0.350 (8.9) | 500 | M61-R6210 |
| Fig. 36 | PTS-0.45-500-321 | B-321 | Polyolefin | White | 10-8 | 0.160 (4.06) | 0.235 (5.97) | 0.450 (11.43) | 0.500 (12.7) | 500 | M61-R6210 |
| Fig. 36 | PTS-0.95-500-321 | B-321 | Polyolefin | White | 10-8 | 0.160 (4.06) | 0.235 (5.97) | 0.950 (24.13) | 0.500 (12.7) | 500 | M61-R6210 |
| Fig. 36 | PTS-1.90-500-321 | B-321 | Polyolefin | White | 10-8 | 0.160 (4.06) | 0.235 (5.97) | 1.900 (48.26) | 0.500 (12.7) | 250 | M61-R6210 |
| Fig. 36 | PTS-0.95-750-321 | B-321 | Polyolefin | White | 4-2 | 0.335 (8.51) | 0.390 (9.91) | 0.950 (24.13) | 0.750 (19.1) | 250 | M61-R6210 |
| Fig. 36 | PTS-1.90-750-321 | B-321 | Polyolefin | White | 4-2 | 0.335 (8.51) | 0.390 (9.91) | 1.900 (48.26) | 0.750 (19.1) | 250 | M61-R6210 |
| Fig. 36 | PTS-0.95-1000-321 | B-321 | Polyolefin | White | 1-0 | 0.375 (9.53) | 0.540 (13.72) | 0.950 (24.13) | 1.000 (25.4) | 250 | M61-R6210 |
| Fig. 36 | PTS-1.90-1000-321 | B-321 | Polyolefin | White | 1-0 | 0.375 (9.53) | 0.540 (13.72) | 1.900 (48.26) | 1.000 (25.4) | 250 | M61-R6210 |

Wire and cable materials

Durasleeve® Wire Marking Inserts (B-390)

- **B-390 Durasleeve® Polypropylene Material:** Matte white polypropylene material is designed to be printed and affixed to a wire using extruded, clear PVC Brady wire marking carriers.





Figure 38

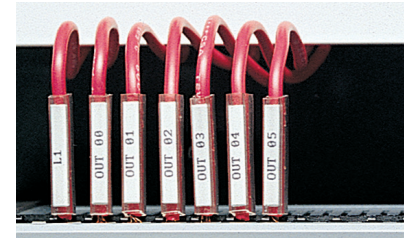

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|--------------|-------|---------------|-------|-------------------------|--------------------------|-----------------|-------------|
| B-390 DuraSleeve® Polypropylene Inserts | | | | | | | | |
| Fig. 38 | BPTDS-15-390 | B-390 | Polypropylene | White | 0.590 (15) | 0.163 (4.14) | 3000 | M61-R6010 |
| Fig. 38 | PTDS-15-390 | B-390 | Polypropylene | White | 0.590 (15) | 0.163 (4.14) | 300 | M61-R6010 |
| Fig. 38 | BPTDS-30-390 | B-390 | Polypropylene | White | 1.181 (30) | 0.163 (4.14) | 3000 | M61-R6010 |
| Fig. 38 | PTDS-30-390 | B-390 | Polypropylene | White | 1.181 (30) | 0.163 (4.14) | 300 | M61-R6010 |

0.590 in. Width Clear Carriers

| Catalog # | Carrier Width Inch (mm) | Wire Outside Diameter Inch (mm) | Wire Gauge | Qty/ Pkg |
|--------------|-------------------------|---------------------------------|------------|----------|
| DMC-1.3/3-15 | 0.590 (14.98) | 0.051 (1.30) to 0.118 (3.00) | 20-12 | 2000 |
| DMC-2.5/5-15 | 0.590 (14.98) | 0.098 (2.50) to 0.197 (5.00) | 16-10 | 3000 |
| DMC-4/10-15 | 0.590 (14.98) | 0.157 (4.00) to 0.393 (10.00) | 10-4 | 4000 |
| DMC-8/16-15 | 0.590 (14.98) | 0.315 (8.00) to 0.630 (16.00) | 6-250 | 7500 |

1.180 in. Width Clear Carriers

| Catalog # | Carrier Width Inch (mm) | Wire Outside Diameter Inch (mm) | Wire Gauge | Qty/ Pkg |
|--------------|-------------------------|---------------------------------|------------|----------|
| DMC-1.3/3-30 | 1.180 (29.97) | 0.051 (1.30) to 0.118 (3.00) | 20-12 | 500 |
| DMC-2.5/5-30 | 1.180 (29.97) | 0.098 (2.50) to 0.197 (5.00) | 16-10 | 100 |
| DMC-4/10-30 | 1.180 (29.97) | 0.157 (4.00) to 0.393 (10.00) | 10-4 | 200 |
| DMC-8/16-30 | 1.180 (29.97) | 0.315 (8.00) to 0.630 (16.00) | 6-250 | 250 |

PermaSleeve® PSFR Fluid Resistant Wire Marking Sleeves (B-344)

3:1 shrink ratio sleeves designed for labeling wires in applications with exposure to fuels, lubricants and harsh chemicals such as in aerospace.

- **B-344 PSFR Fluid Resistant Permasleeves:** Resistant to harsh chemicals, including JP8 Jet Fuel, Skydrol® and DOT 3 brake fluid. Meets the following industry specifications: SAE-AMS-DTL-23053/6 (class 1) and MIL-STD-202G method 215K.




Figure 44



| Diagram | Catalog # | Color | Approx. Wire Gauge | Minimum Wire Dia. Inch (mm) | Maximum Wire Dia. Inch (mm) | Diameter as Supplied B Inch (mm) | Sleeve Width A Inch (mm) | Recovered Diameter Inch (mm) | Qty. Per Roll | Rec. Ribbon |
|---------------------------------|--------------------|--------|--------------------|-----------------------------|-----------------------------|----------------------------------|--------------------------|------------------------------|---------------|--------------|
| B-344 PermaSleeve - PSFR | | | | | | | | | | |
| Fig. 44 | ** PSFR-187-175-WT | White | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 1.750 (44.5) | 0.062 (1.6) | 100 | M61-R6610 |
| Fig. 44 | ** PSFR-250-1-WT | White | 20-10 | 0.083 (2.1) | 0.215 (5.5) | 0.250 (6.4) | 1.000 (25.4) | 0.083 (2.1) | 100 | M61-R6610 |
| Fig. 44 | ** PSFR-500-1-WT | White | 8-1 | 0.166 (4.2) | 0.450 (11.4) | 0.500 (12.7) | 1.000 (25.4) | 0.166 (4.2) | 100 | M61-R6610 |
| Fig. 44 | ** PSFR-250-1-YL | Yellow | 20-10 | 0.083 (2.1) | 0.215 (5.5) | 0.250 (6.4) | 1.000 (25.4) | 0.083 (2.1) | 100 | M61-R6610 |
| Fig. 44 | ** PSFR-250-175-YL | Yellow | 20-10 | 0.083 (2.1) | 0.215 (5.5) | 0.250 (6.4) | 1.750 (44.5) | 0.083 (2.1) | 100 | M61-R6610 |
| Fig. 44 | ** PSFR-750-175-BK | Black | 8-1 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 1.750 (44.5) | 0.250 (6.4) | 100 | M61-R6710-WT |

** ⚠️ **WARNING:** Cancer www.P65Warnings.ca.gov


Wire and cable materials

PermaSleeve® PSPT Wire Marking Sleeves (B-342)

These heat-shrink sleeves are the ultimate in marker durability, permanence and aesthetic appearance. Fast shrink rate saves time and costs during installation.

• B-342 PSPT Polyolefin PermaSleeves:

Military / Industrial grade 3:1 shrink ratio. Meet SAE 23053/5 Class 1 spec. Available as individual die-cut or continuous cut-to-length tubing.

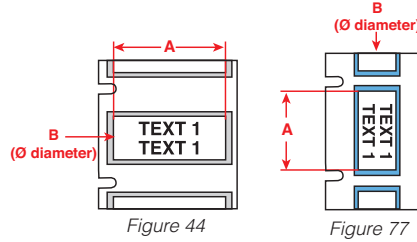


| Diagram | Catalog # | Color | Approx. Wire Gauge | Minimum Wire Diameter Inch (mm) | Maximum Wire Diameter Inch (mm) | Diameter as Supplied B Inch (mm) | Recovered Diameter Inch (mm) | Sleeve Width A Inch (mm) | Qty. Per Roll | Rec. Ribbon |
|---------|---------------------|--------|--------------------|---------------------------------|---------------------------------|----------------------------------|------------------------------|--------------------------|---------------|-------------|
| Fig. 44 | ** PSPT-094-1-WT | White | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-094-175-WT | White | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-094-2-WT-R | White | 28-20 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-125-1-WT | White | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-125-175-WT | White | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-125-2-WT-R | White | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-187-1-WT | White | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-187-175-WT | White | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-187-2-WT-R | White | 20-10 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-250-1-WT | White | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-250-175-WT | White | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-250-2-WT-R | White | 16-8 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-375-1-WT | White | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-375-175-WT | White | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-375-2-WT-R | White | 12-4 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-500-1-WT | White | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-500-175-WT | White | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-500-2-WT-R | White | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-750-1-WT | White | 8-1 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-750-175-WT | White | 8-1 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-750-2-WT-R | White | 2 to 4/0 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-1-WT | White | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.000 (25.4) | 50 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-175-WT | White | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6610 |
| Fig. 77 | ** PSPT-1000-2-WT-R | White | 2 to 0.95 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-094-1-YL | Yellow | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-094-175-YL | Yellow | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-094-2-YL-R | Yellow | 28-20 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-125-1-YL | Yellow | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-125-175-YL | Yellow | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-125-2-YL-R | Yellow | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-187-1-YL | Yellow | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-187-175-YL | Yellow | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-187-2-YL-R | Yellow | 20-10 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-250-1-YL | Yellow | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-250-175-YL | Yellow | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-250-2-YL-R | Yellow | 16-8 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-375-1-YL | Yellow | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-375-175-YL | Yellow | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-375-2-YL-R | Yellow | 12-4 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-500-1-YL | Yellow | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-500-175-YL | Yellow | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-500-2-YL-R | Yellow | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-750-1-YL | Yellow | 8-1 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-750-175-YL | Yellow | 8-1 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 77 | ** PSPT-750-2-YL-R | Yellow | 2 to 4/0 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 2.000 (50.8) | 70 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-1-YL | Yellow | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.000 (25.4) | 50 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-175-YL | Yellow | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6610 |
| Fig. 77 | ** PSPT-1000-2-YL-R | Yellow | 2 to 0.95 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 2.000 (50.8) | 70 | M61-R6610 |

** ⚠️ **WARNING:** Cancer www.P65Warnings.ca.gov

Wire and cable materials

B-342 PSPT PermaSleeves (cont.)

| Diagram | Catalog # | Color | Approx. Wire Gauge | Minimum Wire Diameter Inch (mm) | Maximum Wire Diameter Inch (mm) | Diameter as Supplied B Inch (mm) | Recovered Diameter Inch (mm) | Sleeve Width A Inch (mm) | Qty. Per Roll | Rec. Ribbon |
|---------|---------------------|--------|--------------------|---------------------------------|---------------------------------|----------------------------------|------------------------------|--------------------------|---------------|--------------|
| Fig. 77 | ** PSPT-094-2-BK-R | Black | 28-20 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-125-1-BK | Black | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 77 | ** PSPT-125-2-BK-R | Black | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-1-BK | Black | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-175-BK | Black | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-2-BK-R | Black | 20-10 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-1-BK | Black | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-2-BK-R | Black | 16-8 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-2-BK-R | Black | 12-4 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-500-175-BK | Black | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 77 | ** PSPT-500-2-BK-R | Black | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 77 | ** PSPT-750-2-BK-R | Black | 2 to 4/0 | 0.250 (6.4) | 0.700 (17.8) | 0.750 (19.1) | 0.250 (6.4) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-2-BK-R | Black | 2 to 0.95 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 2.000 (50.8) | 70 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-BK | Black | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-094-1-BL | Blue | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-094-175-BL | Blue | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-125-1-BL | Blue | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-1-BL | Blue | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-1-BL | Blue | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-175-BL | Blue | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-500-175-BL | Blue | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-BL | Blue | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-094-1-GR | Green | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-125-175-GR | Green | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-1-GR | Green | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-175-GR | Green | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-175-GR | Green | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-175-GR | Green | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-500-175-GR | Green | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-GR | Green | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-094-1-OR | Orange | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-094-175-OR | Orange | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-125-175-OR | Orange | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-187-175-OR | Orange | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-250-1-OR | Orange | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-250-175-OR | Orange | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-375-1-OR | Orange | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-375-175-OR | Orange | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-500-1-OR | Orange | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-175-OR | Orange | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6610 |
| Fig. 44 | ** PSPT-094-1-RD | Red | 28-18 | 0.023 (0.6) | 0.080 (2) | 0.094 (2.4) | 0.023 (0.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-125-1-RD | Red | 22-16 | 0.046 (1.2) | 0.110 (2.8) | 0.125 (3.2) | 0.046 (1.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-1-RD | Red | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-187-175-RD | Red | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-1-RD | Red | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-175-RD | Red | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-1-RD | Red | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-175-RD | Red | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-500-175-RD | Red | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-RD | Red | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-250-1-PK | Pink | 16-10 | 0.094 (2.4) | 0.215 (5.5) | 0.250 (6.4) | 0.094 (2.4) | 1.000 (25.4) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-375-175-PK | Pink | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.750 (44.5) | 100 | M61-R6610 |
| Fig. 44 | ** PSPT-1000-175-PK | Pink | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6610 |
| Fig. 44 | ** PSPT-187-1-VT | Violet | 18-12 | 0.062 (1.6) | 0.150 (3.8) | 0.187 (4.8) | 0.062 (1.6) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-VT | Violet | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-375-1-GY | Gray | 12-6 | 0.125 (3.2) | 0.320 (8.1) | 0.375 (9.5) | 0.125 (3.2) | 1.000 (25.4) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-GY | Gray | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |
| Fig. 44 | ** PSPT-500-175-BR | Brown | 8-1 | 0.187 (4.8) | 0.450 (11.4) | 0.500 (12.7) | 0.187 (4.8) | 1.750 (44.5) | 100 | M61-R6710-WT |
| Fig. 44 | ** PSPT-1000-175-BR | Brown | 500-1 | 0.375 (9.5) | 0.950 (24.1) | 1.000 (25.4) | 0.375 (9.5) | 1.750 (44.5) | 50 | M61-R6710-WT |


**  **WARNING:** Cancer www.P65Warnings.ca.gov

Wire and cable materials

PermaSleeve® PSHT High Heat Wire Marking Sleeves (B-345)

Specifically designed for high temperature and low vacuum outgassing applications.

- **B-345 PSHT Polyolefin PermaSleeves:** Made from irradiated high temperature PVDF and have an operating temperature of -67°F to +437°F (-55°C to +225°C). Meet industry specifications: NASA SP-R-0022A Outgassing Performance; SAE-AS-81531; MIL-STD-202; RoHS compliant. Tested per SAE-AMS-DTL-23053/18, Class 2; ASTM E162, ASTM E662.



| Diagram | Catalog # | Color | Approx. Wire Gauge | Minimum Wire Diameter Inch (mm) | Maximum Wire Diameter Inch (mm) | Diameter as Supplied B Inch (mm) | Sleeve Width A Inch (mm) | Recovered Diameter Inch (mm) | Qty. Per Roll | Rec. Ribbon |
|---------|------------------|--------|--------------------|---------------------------------|---------------------------------|----------------------------------|--------------------------|------------------------------|---------------|--------------|
| Fig. 44 | PSHT-094-1-WT | White | 26-18 | 0.031 (0.8) | 0.080 (2) | 0.094 (2.4) | 1.000 (25.4) | 0.031 (0.8) | 100 | M61-R6610 |
| Fig. 44 | PSHT-094-175-WT | White | 26-18 | 0.031 (0.8) | 0.080 (2) | 0.094 (2.4) | 1.750 (44.5) | 0.031 (0.8) | 100 | M61-R6610 |
| Fig. 44 | PSHT-125-1-WT | White | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.000 (25.4) | 0.063 (1.6) | 100 | M61-R6610 |
| Fig. 44 | PSHT-125-175-WT | White | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.750 (44.5) | 0.063 (1.6) | 100 | M61-R6610 |
| Fig. 44 | PSHT-187-1-WT | White | 16-12 | 0.094 (2.4) | 0.150 (3.8) | 0.187 (4.8) | 1.000 (25.4) | 0.094 (2.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-187-175-WT | White | 16-12 | 0.094 (2.4) | 0.150 (3.8) | 0.187 (4.8) | 1.750 (44.5) | 0.094 (2.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-250-1-WT | White | 14-8 | 0.125 (3.2) | 0.215 (5.5) | 0.250 (6.4) | 1.000 (25.4) | 0.125 (3.2) | 100 | M61-R6610 |
| Fig. 44 | PSHT-250-175-WT | White | 14-8 | 0.125 (3.2) | 0.215 (5.5) | 0.250 (6.4) | 1.750 (44.5) | 0.125 (3.2) | 100 | M61-R6610 |
| Fig. 44 | PSHT-375-1-WT | White | 10-6 | 0.187 (4.7) | 0.320 (8.1) | 0.375 (9.5) | 1.000 (25.4) | 0.187 (4.7) | 100 | M61-R6610 |
| Fig. 44 | PSHT-375-175-WT | White | 10-6 | 0.187 (4.7) | 0.320 (8.1) | 0.375 (9.5) | 1.750 (44.5) | 0.187 (4.7) | 100 | M61-R6610 |
| Fig. 44 | PSHT-500-1-WT | White | 8-1 | 0.250 (6.4) | 0.450 (11.4) | 0.500 (12.7) | 1.000 (25.4) | 0.250 (6.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-500-175-WT | White | 8-1 | 0.250 (6.4) | 0.450 (11.4) | 0.500 (12.7) | 1.750 (44.5) | 0.250 (6.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-750-1-WT | White | 4 | 0.375 (9.5) | 0.700 (17.8) | 0.750 (19.1) | 1.000 (25.4) | 0.375 (9.5) | 100 | M61-R6610 |
| Fig. 44 | PSHT-750-175-WT | White | 4 | 0.375 (9.5) | 0.700 (17.8) | 0.750 (19.1) | 1.750 (44.5) | 0.375 (9.5) | 100 | M61-R6610 |
| Fig. 44 | PSHT-1000-1-WT | White | - | 0.450 (11.4) | 0.950 (24.1) | 1.000 (25.4) | 1.000 (25.4) | 0.450 (11.4) | 50 | M61-R6610 |
| Fig. 44 | PSHT-1000-175-WT | White | - | 0.450 (11.4) | 0.950 (24.1) | 1.000 (25.4) | 1.750 (44.5) | 0.450 (11.4) | 50 | M61-R6610 |
| Fig. 44 | PSHT-094-1-YL | Yellow | 26-18 | 0.031 (0.8) | 0.080 (2) | 0.094 (2.4) | 1.000 (25.4) | 0.031 (0.8) | 100 | M61-R6610 |
| Fig. 44 | PSHT-094-175-YL | Yellow | 26-18 | 0.031 (0.8) | 0.080 (2) | 0.094 (2.4) | 1.750 (44.5) | 0.031 (0.8) | 100 | M61-R6610 |
| Fig. 44 | PSHT-125-1-YL | Yellow | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.000 (25.4) | 0.063 (1.6) | 100 | M61-R6610 |
| Fig. 44 | PSHT-125-175-YL | Yellow | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.750 (44.5) | 0.063 (1.6) | 100 | M61-R6610 |
| Fig. 44 | PSHT-250-1-YL | Yellow | 14-8 | 0.125 (3.2) | 0.215 (5.5) | 0.250 (6.4) | 1.000 (25.4) | 0.125 (3.2) | 100 | M61-R6610 |
| Fig. 44 | PSHT-250-175-YL | Yellow | 14-8 | 0.125 (3.2) | 0.215 (5.5) | 0.250 (6.4) | 1.750 (44.5) | 0.125 (3.2) | 100 | M61-R6610 |
| Fig. 44 | PSHT-187-1-YL | Yellow | 16-12 | 0.094 (2.4) | 0.150 (3.8) | 0.187 (4.8) | 1.000 (25.4) | 0.094 (2.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-187-175-YL | Yellow | 16-12 | 0.094 (2.4) | 0.150 (3.8) | 0.187 (4.8) | 1.000 (25.4) | 0.094 (2.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-375-1-YL | Yellow | 10-6 | 0.187 (4.7) | 0.320 (8.1) | 0.375 (9.5) | 1.000 (25.4) | 0.187 (4.7) | 100 | M61-R6610 |
| Fig. 44 | PSHT-375-175-YL | Yellow | 10-6 | 0.187 (4.7) | 0.320 (8.1) | 0.375 (9.5) | 1.750 (44.5) | 0.187 (4.7) | 100 | M61-R6610 |
| Fig. 44 | PSHT-500-1-YL | Yellow | 8-1 | 0.250 (6.4) | 0.450 (11.4) | 0.500 (12.7) | 1.000 (25.4) | 0.250 (6.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-500-175-YL | Yellow | 8-1 | 0.250 (6.4) | 0.450 (11.4) | 0.500 (12.7) | 1.750 (44.5) | 0.250 (6.4) | 100 | M61-R6610 |
| Fig. 44 | PSHT-750-1-YL | Yellow | 4 | 0.375 (9.5) | 0.700 (17.8) | 0.750 (19.1) | 1.000 (25.4) | 0.375 (9.5) | 100 | M61-R6610 |
| Fig. 44 | PSHT-750-175-YL | Yellow | 4 | 0.375 (9.5) | 0.700 (17.8) | 0.750 (19.1) | 1.750 (44.5) | 0.375 (9.5) | 100 | M61-R6610 |
| Fig. 44 | PSHT-1000-1-YL | Yellow | - | 0.450 (11.4) | 0.950 (24.1) | 1.000 (25.4) | 1.000 (25.4) | 0.450 (11.4) | 50 | M61-R6610 |
| Fig. 44 | PSHT-1000-175-YL | Yellow | - | 0.450 (11.4) | 0.950 (24.1) | 1.000 (25.4) | 1.750 (44.5) | 0.450 (11.4) | 50 | M61-R6610 |
| Fig. 44 | PSHT-125-1-BK | Black | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.000 (25.4) | 0.063 (1.6) | 100 | M61-R4410-WT |
| Fig. 44 | PSHT-125-1-BL | Blue | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.000 (25.4) | 0.063 (1.6) | 100 | M61-R4410-WT |
| Fig. 44 | PSHT-125-175-BL | Blue | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.750 (44.5) | 0.063 (1.6) | 100 | M61-R4410-WT |
| Fig. 44 | PSHT-187-175-BL | Blue | 16-12 | 0.094 (2.4) | 0.150 (3.8) | 0.187 (4.8) | 1.750 (44.5) | 0.094 (2.4) | 100 | M61-R4410-WT |
| Fig. 44 | PSHT-125-1-PK | Pink | 20-16 | 0.063 (1.6) | 0.110 (2.8) | 0.125 (3.2) | 1.000 (25.4) | 0.063 (1.6) | 100 | M61-R6610 |

Terminal block / patch panel materials

Terminal Block and Patch Panel Adhesive Strips (B-422, B-428, B-430, B-483 and B-498)

When using terminal block mode in the app, printer can serialize and pre-space to your special thin widths to fit terminal blocks.

- **B-422 Glossy Polyester Material:** Permanent adhesive, good for powder-coated and textured surfaces. Best on flat surfaces. Temp. range: -40°F to 212°F (-40°C to 100°C). UL recognized.
- **B-428 Metallized Polyester Material:** Permanent adhesive, silver finish. Temp. range: -40°F to 176°F (-40°C to 80°C). UL recognized.
- **B-430 Clear Glossy Polyester Material:** Translucent, high performance polyester material with a glossy finish. Non-colored label with permanent adhesive. Good for general purpose thermal transfer printing.
- **B-483 Polyester Material:** Permanent adhesive for powder-coated and textured surfaces. Best on flat surfaces. Temp. range: -40°F to 248°F (-40°C to 120°C). UL recognized.
- **B-498 Repositionable Vinyl Cloth Material:** Special adhesive stays put, but marker can be removed and reapplied if necessary. Temp. range -40°F to 175°F (-40°C to 79°C). UL recognized.


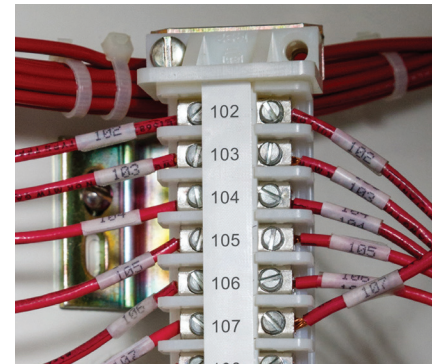


Figure 30




Figure 33

The M61C- parts below come on a notched liner which helps the BradyPrinter M611 achieve improved registration.

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|----------------|-------|-------------|------------|----------------------------|-----------------------------|--------------------|-------------|
| B-422 Polyester | | | | | | | | |
| Fig. 33 | M61C-375-422 | B-422 | Polyester | White | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | M61C-475-422 | B-422 | Polyester | White | 0.475 (12.07) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | M61C-500-422 | B-422 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | M61C-625-422 | B-422 | Polyester | White | 0.625 (15.88) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| B-428 Metallized Polyester | | | | | | | | |
| Fig. 33 | M61C-500-428 | B-428 | Polyester | Light Gray | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| B-430 Clear Polyester | | | | | | | | |
| Fig. 33 | M61C-375-430 | B-430 | Polyester | Clear | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | M61C-500-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| B-483 Ultra Aggressive Polyester | | | | | | | | |
| Fig. 30 | M61C-500-483 | B-483 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| B-498 Repositionable Vinyl Cloth | | | | | | | | |
| Fig. 30 | PTLTB-498-240 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | PTLTB-498-318 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | M61C-240-498 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | PTLTB-498-375 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | BPTLTB-498-375 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 300 ft (91.44 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | BPTLTB-498-240 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 300 ft (91.44 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | BPTLTB-498-318 | B-498 | Vinyl Cloth | White | 0.240 (6.1) | 300 ft (91.44 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | M61C-318-498 | B-498 | Vinyl Cloth | White | 0.318 (8.08) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | M61C-375-498 | B-498 | Vinyl Cloth | White | 0.375 (9.53) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 30 | PTL-8-498 | B-498 | Vinyl Cloth | White | 0.500 (12.7) | 30 ft (9.14 m) | 1 roll (cont.) | M61-R4310 |

▶ BradyPrinter M611 Printer Magnet Accessory

(Catalog Number: BMP-MAGNET-1)

The heavy-duty magnet accessory* allows you to go hands-free with your BradyPrinter M611 printer. Simply attach the magnet to the back of your printer and then stick it to any magnetized surface.

*Sold separately.



Raised panel materials

Raised Panel (B-593)

- B-593 Foam Backed Polyester Material:**
 Glossy, foam-backed polyester with permanent adhesive, coined a “raised panel” label. Ideal for external pushbuttons, switches and internal connection points. Can be printed with alphanumeric for use as rating and serial plates.




Figure 49






Figure 29

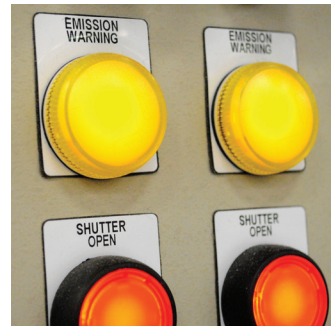

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Hole Dia. Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---------------------------|------------------|-------|-----------|--------|----------------------------|-----------------------------|------------------------|--------------------|--------------|
| Push Button Format | | | | | | | | | |
| Fig. 49 | PTLEP-167-593 | B-593 | Polyester | White | 1.200 (30.48) | 1.500 (38.1) | 0.886 (22.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-168-593 | B-593 | Polyester | White | 1.200 (30.48) | 1.900 (48.3) | 0.886 (22.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-169-593 | B-593 | Polyester | White | 1.800 (45.72) | 1.800 (45.7) | 1.201 (30.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-167-593-YL | B-593 | Polyester | Yellow | 1.200 (30.48) | 1.500 (38.1) | 0.886 (22.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-168-593-YL | B-593 | Polyester | Yellow | 1.200 (30.48) | 1.900 (48.3) | 0.886 (22.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-169-593-YL | B-593 | Polyester | Yellow | 1.800 (45.72) | 1.800 (45.7) | 1.201 (30.5) | 100 | M61-R6010 |
| Fig. 49 | PTLEP-167-593-RD | B-593 | Polyester | Red | 1.200 (30.48) | 1.500 (38.1) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-168-593-RD | B-593 | Polyester | Red | 1.200 (30.48) | 1.900 (48.3) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-169-593-RD | B-593 | Polyester | Red | 1.800 (45.72) | 1.800 (45.7) | 1.201 (30.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-167-593-GN | B-593 | Polyester | Green | 1.200 (30.48) | 1.500 (38.1) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-168-593-GN | B-593 | Polyester | Green | 1.200 (30.48) | 1.900 (48.3) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-169-593-GN | B-593 | Polyester | Green | 1.800 (45.72) | 1.800 (45.7) | 1.201 (30.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-167-593-BK | B-593 | Polyester | Black | 1.200 (30.48) | 1.500 (38.1) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-168-593-BK | B-593 | Polyester | Black | 1.200 (30.48) | 1.900 (48.3) | 0.886 (22.5) | 100 | M61-R4410-WT |
| Fig. 49 | PTLEP-169-593-BK | B-593 | Polyester | Black | 1.800 (45.72) | 1.800 (45.7) | 1.201 (30.5) | 100 | M61-R4410-WT |
| Rectangular Format | | | | | | | | | |
| Fig. 29 | PTLEP-173-593 | B-593 | Polyester | White | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R6010 |
| Fig. 29 | PTLEP-176-593 | B-593 | Polyester | White | 1.000 (25.4) | 3.000 (76.2) | - | 50 | M61-R6010 |
| Fig. 29 | PTLEP-174-593 | B-593 | Polyester | White | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R6010 |
| Fig. 29 | PTLEP-171-593 | B-593 | Polyester | White | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R6010 |
| Fig. 29 | PTLEP-173-593-YL | B-593 | Polyester | Yellow | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R6010 |
| Fig. 29 | PTLEP-176-593-YL | B-593 | Polyester | Yellow | 1.000 (25.4) | 3.000 (76.2) | - | 50 | M61-R6010 |
| Fig. 29 | PTLEP-174-593-YL | B-593 | Polyester | Yellow | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R6010 |
| Fig. 29 | PTLEP-171-593-YL | B-593 | Polyester | Yellow | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R6010 |
| Fig. 29 | PTLEP-173-593-RD | B-593 | Polyester | Red | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R4410-WT |
| Fig. 29 | PTLEP-176-593-RD | B-593 | Polyester | Red | 1.000 (25.4) | 3.000 (76.2) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-174-593-RD | B-593 | Polyester | Red | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-171-593-RD | B-593 | Polyester | Red | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R4410-WT |
| Fig. 29 | PTLEP-173-593-GN | B-593 | Polyester | Green | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R4410-WT |
| Fig. 29 | PTLEP-176-593-GN | B-593 | Polyester | Green | 1.000 (25.4) | 3.000 (76.2) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-174-593-GN | B-593 | Polyester | Green | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-171-593-GN | B-593 | Polyester | Green | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R4410-WT |
| Fig. 29 | PTLEP-173-593-SL | B-593 | Polyester | Silver | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R6010 |
| Fig. 29 | PTLEP-174-593-SL | B-593 | Polyester | Silver | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R6010 |
| Fig. 29 | PTLEP-171-593-SL | B-593 | Polyester | Silver | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R6010 |
| Fig. 29 | PTLEP-173-593-BK | B-593 | Polyester | Black | 1.000 (25.4) | 2.000 (50.8) | - | 100 | M61-R4410-WT |
| Fig. 29 | PTLEP-176-593-BK | B-593 | Polyester | Black | 1.000 (25.4) | 3.000 (76.2) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-174-593-BK | B-593 | Polyester | Black | 1.000 (25.4) | 4.000 (101.6) | - | 50 | M61-R4410-WT |
| Fig. 29 | PTLEP-171-593-BK | B-593 | Polyester | Black | 1.060 (26.9) | 0.490 (12.4) | - | 200 | M61-R4410-WT |

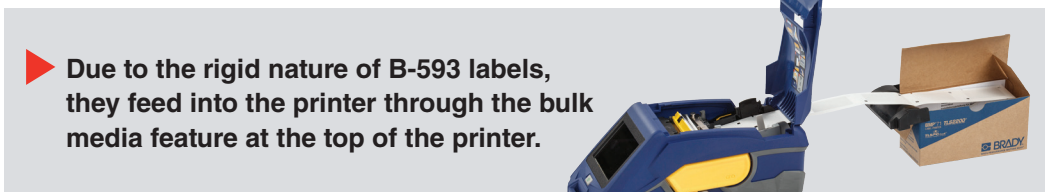

▶ Due to the rigid nature of B-593 labels, they feed into the printer through the bulk media feature at the top of the printer.

Asset tracking materials

Metallized Asset Tracking (B-428, B-435 and B-486)

- **B-428 Metallized Polyester Material:** Permanent adhesive, silver finish. Temp. range: -40°F to 176°F (-40°C to 80°C). UL recognized.
- **B-435 Glossy Metallized Polyester Material:** Withstands numerous solvents and variable temps. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.
- **B-486 Ultra Aggressive Metallized Polyester Material:** Designed for high adhesion to textured metals, powder coated surfaces and low surface energy plastics. Withstands numerous solvents and variable temps.




Figure 29




Figure 33




Figure 40




Figure 46
(Includes black border)




Figure 51




Figure 54


| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|-----------------|-------|-----------|------------|----------------------------|-----------------------------|--------------------|-------------|
| B-428 Metallized Polyester | | | | | | | | |
| Fig. 33 | PTL-8-428 | B-428 | Polyester | Light Gray | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 51 | PTL-30-428-CALI | B-428 | Polyester | Light Gray | 0.750 (19.05) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-15-428 | B-428 | Polyester | Light Gray | 1.000 (25.4) | 0.275 (7) | 750 | M61-R4310 |
| Fig. 29 | PTL-17-428 | B-428 | Polyester | Light Gray | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 40 | PTPSL-17-428 | B-428 | Polyester | Light Gray | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-22-428 | B-428 | Polyester | Light Gray | 1.000 (25.4) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 46 | PTL-24-428-BK | B-428 | Polyester | Light Gray | 1.130 (28.7) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-26-428 | B-428 | Polyester | Light Gray | 1.250 (31.75) | 2.750 (69.9) | 100 | M61-R4310 |
| Fig. 40 | PTPSL-26-428 | B-428 | Polyester | Light Gray | 1.250 (31.8) | 2.750 (69.85) | 100 | M61-R4310 |
| Fig. 29 | PTL-29-428 | B-428 | Polyester | Light Gray | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 54 | PTL-35-428-PROP | B-428 | Polyester | Light Gray | 1.630 (41.4) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 40 | PTPSL-50-428 | B-428 | Polyester | Light Gray | 1.650 (41.9) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-37-428 | B-428 | Polyester | Light Gray | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-38-428 | B-428 | Polyester | Light Gray | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 40 | PTPSL-20-428 | B-428 | Polyester | Light Gray | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 29 | PTL-20-428 | B-428 | Polyester | Light Gray | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |
| B-435 Glossy Metallized Polyester | | | | | | | | |
| Fig. 29 | PTL-16-435 | B-435 | Polyester | Silver | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-17-435 | B-435 | Polyester | Silver | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-29-435 | B-435 | Polyester | Silver | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-30-435 | B-435 | Polyester | Silver | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R6010 |
| Fig. 29 | PTL-31-435 | B-435 | Polyester | Silver | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-32-435 | B-435 | Polyester | Silver | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R6010 |
| Fig. 29 | PTL-37-435 | B-435 | Polyester | Silver | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-38-435 | B-435 | Polyester | Silver | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 29 | PTL-20-435 | B-435 | Polyester | Silver | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| B-486 Ultra Aggressive Metallized Polyester | | | | | | | | |
| Fig. 29 | PTL-16-486 | B-486 | Polyester | Light Gray | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R4310 |
| Fig. 29 | PTL-17-486 | B-486 | Polyester | Light Gray | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-19-486 | B-486 | Polyester | Light Gray | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 46 | PTL-24-486-BK | B-486 | Polyester | Light Gray | 1.130 (28.7) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-29-486 | B-486 | Polyester | Light Gray | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-30-486 | B-486 | Polyester | Light Gray | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-31-486 | B-486 | Polyester | Light Gray | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-32-486 | B-486 | Polyester | Light Gray | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-37-486 | B-486 | Polyester | Light Gray | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-38-486 | B-486 | Polyester | Light Gray | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 29 | PTL-20-486 | B-486 | Polyester | Light Gray | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |

Asset tracking materials

Non-Metallized Asset Tracking (B-422, B-423, B-430 and B-483)

Materials used to identify assets and property from tools and warehouse equipment to office furniture and computers.

- **B-422 Polyester Material:** Permanent adhesive, good for powder-coated and textured surfaces. Temp. range: -40°F to 212°F (-40°C to 100°C). UL recognized.
- **B-423 Glossy White Polyester Material:** UL recognized for outdoor use on glass, thermoset polyester plastic and polyvinyl fluoride plastic.
- **B-430 Clear Polyester Material:** Translucent, high performance polyester material with a glossy finish. Non-colored label with permanent adhesive. Good for general purpose thermal transfer printing.
- **B-483 Ultra Agressive Polyester Material:** Permanent adhesive for powder-coated and textured surfaces. Best on flat surfaces Temp. range: -40°F to 248°F (-40°C to 120°C). UL recognized.

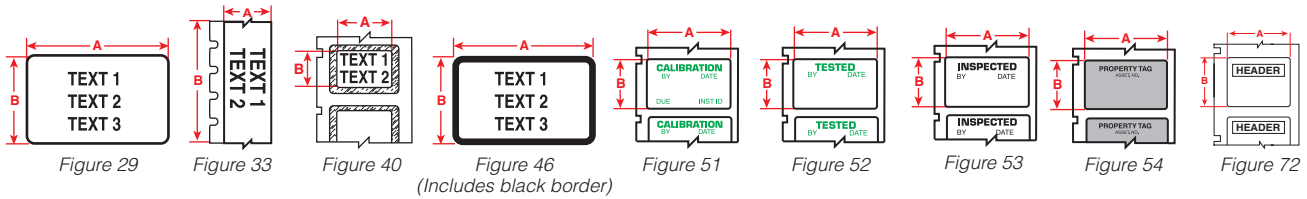

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|-----------------|-------|-----------|-----------------|----------------------------|-----------------------------|--------------------|-------------|
| B-422 Permanent Polyester | | | | | | | | |
| Fig. 29 | PTL-39-422 | B-422 | Polyester | White | 0.375 (9.53) | 0.600 (15.2) | 750 | M61-R6010 |
| Fig. 33 | PTL-46-422 | B-422 | Polyester | White | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-5-422 | B-422 | Polyester | White | 0.500 (12.7) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | PTL-44-422 | B-422 | Polyester | White | 0.500 (12.7) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-7-422 | B-422 | Polyester | White | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 33 | PTL-8-422 | B-422 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-16-422 | B-422 | Polyester | White | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 40 | PTPSL-17-422 | B-422 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-17-422 | B-422 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-19-422 | B-422 | Polyester | White | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-22-422 | B-422 | Polyester | White | 1.000 (25.4) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-23-422 | B-422 | Polyester | White | 1.000 (25.4) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 33 | PTL-42-422 | B-422 | Polyester | White | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 40 | PTPSL-26-422 | B-422 | Polyester | White | 1.250 (31.8) | 2.750 (69.85) | 100 | M61-R6010 |
| Fig. 29 | PTL-45-422 | B-422 | Polyester | White | 1.500 (38.1) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-29-422 | B-422 | Polyester | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-30-422 | B-422 | Polyester | White | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R6010 |
| Fig. 29 | PTL-32-422 | B-422 | Polyester | White | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R6010 |
| Fig. 54 | PTL-35-422-PROP | B-422 | Polyester | Black on Silver | 1.630 (41.4) | 0.750 (19.1) | 250 | M61-R6010 |
| Fig. 40 | PTPSL-50-422 | B-422 | Polyester | White | 1.650 (41.9) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 33 | PTL-43-422 | B-422 | Polyester | White | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-37-422 | B-422 | Polyester | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-38-422 | B-422 | Polyester | White | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 40 | PTPSL-20-422 | B-422 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| Fig. 29 | PTL-20-422 | B-422 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| B-423 Glossy Permanent Polyester | | | | | | | | |
| Fig. 29 | PTL-1-423 | B-423 | Polyester | White | 0.250 (6.35) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-3-423 | B-423 | Polyester | White | 0.375 (9.53) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-4-423 | B-423 | Polyester | White | 0.400 (10.2) | 0.400 (10.2) | 500 | M61-R6010 |
| Fig. 29 | PTL-5-423 | B-423 | Polyester | White | 0.500 (12.7) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 53 | PTL-6-423 | B-423 | Polyester | White | 0.500 (12.7) | 0.275 (7) | 750 | M61-R6010 |
| Fig. 29 | PTL-7-423 | B-423 | Polyester | White | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 33 | PTL-8-423 | B-423 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-9-423 | B-423 | Polyester | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | PTL-10-423 | B-423 | Polyester | White | 0.750 (19.05) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 53 | PTL-30-423-INSP | B-423 | Polyester | Black on White | 1.500 (38.1) | 0.750 (19.05) | 250 | M61-R6010 |
| Fig. 51 | PTL-30-423-CALI | B-423 | Polyester | Green on White | 1.500 (38.1) | 0.750 (19.05) | 250 | M61-R6010 |
| Fig. 52 | PTL-30-423-TEST | B-423 | Polyester | Green on White | 1.500 (38.1) | 0.750 (19.05) | 250 | M61-R6010 |
| Fig. 29 | PTL-13-423 | B-423 | Polyester | White | 0.900 (22.86) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-14-423 | B-423 | Polyester | White | 1.000 (25.4) | 0.187 (4.7) | 750 | M61-R6010 |
| Fig. 29 | PTL-15-423 | B-423 | Polyester | White | 1.000 (25.4) | 0.275 (7) | 750 | M61-R6010 |

Asset tracking materials

Asset Tracking Materials (cont.)

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|--------------------|-------|-----------|-----------------|----------------------------|-----------------------------|--------------------|-------------|
| Fig. 29 | PTL-16-423 | B-423 | Polyester | White | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-17-423 | B-423 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-19-423 | B-423 | Polyester | White | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-22-423 | B-423 | Polyester | White | 1.000 (25.4) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-23-423 | B-423 | Polyester | White | 1.000 (25.4) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 46 | PTL-24-423-BK | B-423 | Polyester | White | 1.130 (28.7) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-25-423 | B-423 | Polyester | White | 1.250 (31.75) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-26-423 | B-423 | Polyester | White | 1.250 (31.75) | 2.750 (69.9) | 100 | M61-R6010 |
| Fig. 29 | PTL-27-423 | B-423 | Polyester | White | 1.500 (38.1) | 0.125 (3.2) | 750 | M61-R6010 |
| Fig. 29 | PTL-28-423 | B-423 | Polyester | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-29-423 | B-423 | Polyester | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | M61-30-423 | B-423 | Polyester | White | 1.500 (38.1) | 0.750 (19.05) | 250 | M61-R6010 |
| Fig. 29 | PTL-31-423 | B-423 | Polyester | White | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-32-423 | B-423 | Polyester | White | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R6010 |
| Fig. 29 | PTL-35-423-PROP | B-423 | Polyester | Black on Silver | 1.630 (41.4) | 0.750 (19.1) | 250 | M61-R6010 |
| Fig. 29 | M61-52-423 | B-423 | Polyester | White | 1.900 (48.3) | 0.600 (15.2) | 250 | M61-R6010 |
| Fig. 29 | PTL-37-423 | B-423 | Polyester | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-38-423 | B-423 | Polyester | White | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 29 | PTL-2-423 | B-423 | Polyester | White | 2.000 (50.8) | 0.250 (6.4) | 100 | M61-R6010 |
| Fig. 29 | PTL-20-423 | B-423 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| B-430 Clear Polyester | | | | | | | | |
| Fig. 33 | M61C-375-430 | B-430 | Polyester | Clear | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | M61C-500-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-71-430 | B-430 | Polyester | Clear | 0.350 (8.89) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 34 | PTL-39-430 | B-430 | Polyester | Clear | 0.375 (9.53) | 0.600 (15.2) | 750 | M61-R6010 |
| Fig. 33 | PTL-46-430 | B-430 | Polyester | Clear | 0.375 (9.53) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 53 | PTL-6-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 0.275 (7) | 750 | M61-R6010 |
| Fig. 29 | PTL-44-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-7-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 33 | PTL-8-430 | B-430 | Polyester | Clear | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-16-430 | B-430 | Polyester | Clear | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-17-430 | B-430 | Polyester | Clear | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | M61-22-430 | B-430 | Polyester | Clear | 1.000 (25.4) | 1.000 (25.4) | 100 | M61-R6010 |
| Fig. 29 | M61-37-430 | B-430 | Polyester | Clear | 1.000 (25.4) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 33 | PTL-42-430 | B-430 | Polyester | Clear | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-28-430 | B-430 | Polyester | Clear | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-45-430 | B-430 | Polyester | Clear | 1.500 (38.1) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-29-430 | B-430 | Polyester | Clear | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | M61-30-430 | B-430 | Polyester | Clear | 1.500 (38.1) | 0.750 (19.05) | 250 | M61-R6010 |
| Fig. 29 | M61-52-430 | B-430 | Polyester | Clear | 1.900 (48.26) | 0.600 (15.2) | 250 | M61-R6010 |
| Fig. 29 | M61-78-430 | B-430 | Polyester | Clear | 1.900 (48.26) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 33 | PTL-43-430 | B-430 | Polyester | Clear | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| B-483 Ultra Aggressive Polyester | | | | | | | | |
| Fig. 33 | PTL-101-483 | B-483 | Polyester | White | 0.250 (6.35) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-61-483 | B-483 | Polyester | White | 0.500 (12.7) | 2.000 (50.8) | 100 | M61-R6010 |
| Fig. 33 | PTL-8-483 | B-483 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 53 | PTL-62-483 | B-483 | Polyester | White | 0.750 (19.05) | 4.000 (101.6) | 50 | M61-R6010 |
| Fig. 53 | PTL-63-483 | B-483 | Polyester | White | 0.750 (19.05) | 8.000 (203.2) | 50 | M61-R6010 |
| Fig. 29 | PTL-16-483 | B-483 | Polyester | White | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 29 | PTL-17-483 | B-483 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-19-483 | B-483 | Polyester | White | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 33 | PTL-42-483 | B-483 | Polyester | White | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 46 | PTL-24-483-BK | B-483 | Polyester | White | 1.130 (28.7) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 33 | PTL-100-483 | B-483 | Polyester | White | 1.300 (33.02) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-65-483 | B-483 | Polyester | White | 1.375 (34.93) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-29-483 | B-483 | Polyester | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-30-483 | B-483 | Polyester | White | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R6010 |
| Fig. 29 | PTL-31-483 | B-483 | Polyester | White | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-32-483 | B-483 | Polyester | White | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R6010 |
| Fig. 33 | PTL-43-483 | B-483 | Polyester | White | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-20-483 | B-483 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| Fig. 29 | PTL-37-483 | B-483 | Polyester | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 72 | PTL-37-483-WARNING | B-483 | Polyester | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |
| Fig. 29 | PTL-23-483 | B-483 | Polyester | White | 1.000 (25.4) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 29 | PTL-38-483 | B-483 | Polyester | White | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R6010 |
| Fig. 72 | PTL-38-483-WARNING | B-483 | Polyester | White | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R6010 |

Circuit board materials

Static Dissipative Materials (B-473, B-717, B-718 and B-719)

Low profile polyimide and polyester materials that have static dissipative properties. Primarily used for printed circuit boards and electronic component labeling.

- **B-473 Electrostatic Dissipative Polyester Material:** White glossy polyester with a permanent static dissipative adhesive and liner.
- **B-717 Electrostatic Dissipative Polyimide Material:** High temperature white glossy polyimide material (2 mil) with a permanent static dissipative adhesive and liner for PCB identification.
- **B-718 Glossy Low Profile Electrostatic Dissipative Polyimide Material:** High temperature, low profile white glossy polyimide material (1 mil) with a permanent static dissipative adhesive and liner for PCB identification.
- **B-719 Matte Low Profile Electrostatic Dissipative Polyimide Material:** High temperature, low profile white matte polyimide material (1 mil) with a permanent static dissipative adhesive and liner.


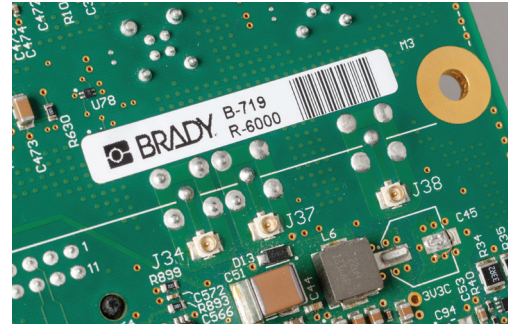


Figure 29




Figure 41

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|---------------|-------|-----------|-----------------|----------------------------|-----------------------------|--------------------|-------------|
| B-473 Glossy White Electrostatic Dissipative Polyester | | | | | | | | |
| Fig. 29 | ** PTL-1-473 | B-473 | Polyester | White | 0.250 (6.35) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-5-473 | B-473 | Polyester | White | 0.500 (12.7) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-6-473 | B-473 | Polyester | White | 0.500 (12.7) | 0.275 (7) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-9-473 | B-473 | Polyester | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-10-473 | B-473 | Polyester | White | 0.750 (19.05) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-16-473 | B-473 | Polyester | White | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R6010 |
| Fig. 41 | ** PTL-17-473 | B-473 | Polyester | Black on Yellow | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-17-473 | B-473 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-28-473 | B-473 | Polyester | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| B-717 Glossy White Static Dissipative Polyimide | | | | | | | | |
| Fig. 29 | ** PTL-10-717 | B-717 | Polyimide | White | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-3-717 | B-717 | Polyimide | White | 0.375 (9.53) | 0.375 (9.53) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-1-717 | B-717 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-9-717 | B-717 | Polyimide | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-25-717 | B-717 | Polyimide | White | 1.250 (31.75) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-27-717 | B-717 | Polyimide | White | 1.500 (38.1) | 0.125 (3.2) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-28-717 | B-717 | Polyimide | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-14-717 | B-717 | Polyimide | White | 2.000 (50.8) | 0.187 (4.7) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-2-717 | B-717 | Polyimide | White | 2.000 (50.8) | 0.250 (6.35) | 100 | M61-R6010 |
| B-718 Glossy White Low Profile Static Dissipative Polyimide | | | | | | | | |
| Fig. 29 | ** PTL-14-718 | B-718 | Polyimide | White | 0.187 (4.7) | 3.000 (76.2) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-10-718 | B-718 | Polyimide | White | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-3-718 | B-718 | Polyimide | White | 0.375 (9.53) | 0.375 (9.53) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-1-718 | B-718 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-16-718 | B-718 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-4-718 | B-718 | Polyimide | White | 0.400 (10.2) | 0.400 (10.2) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-6-718 | B-718 | Polyimide | White | 0.500 (12.7) | 0.275 (6.98) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-9-718 | B-718 | Polyimide | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-13-718 | B-718 | Polyimide | White | 0.900 (22.86) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-28-718 | B-718 | Polyimide | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| B-719 Matte White Low Profile Static Dissipative Polyimide | | | | | | | | |
| Fig. 29 | ** PTL-10-719 | B-719 | Polyimide | White | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-16-719 | B-719 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-4-719 | B-719 | Polyimide | White | 0.400 (10.2) | 0.400 (10.2) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-6-719 | B-719 | Polyimide | White | 0.500 (12.7) | 0.275 (6.98) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-17-719 | B-719 | Polyimide | White | 0.500 (12.7) | 3.000 (76.2) | 500 | M61-R6010 |
| Fig. 29 | ** PTL-9-719 | B-719 | Polyimide | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-13-719 | B-719 | Polyimide | White | 0.900 (22.86) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | ** PTL-28-719 | B-719 | Polyimide | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |

** ⚠️ WARNING: Cancer www.P65Warnings.ca.gov

High Temperature Polyimides (B-724 and B-727)

Low profile polyimide materials that have static dissipative properties. Primarily used for printed circuit boards and electronic component labeling.

- **B-724 Polyimide Material:** Amber matte polyimide with permanent adhesive; can survive on the top or bottom side of PCBs through the solder process.
- **B-727 Glossy Polyimide Material:** White glossy polyimide with permanent adhesive; withstands wave solder environments for printed circuit board and electronic component preprocess labeling.





Figure 29

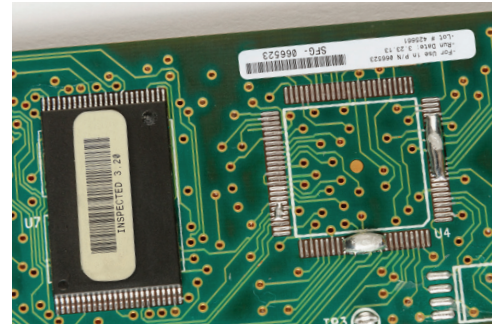

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--|------------|-------|-----------|-------|----------------------------|-----------------------------|--------------------|-------------|
| B-724 Matte Polyimide Material | | | | | | | | |
| Fig. 29 | PTL-10-724 | B-724 | Polyimide | Amber | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R4310 |
| Fig. 29 | PTL-3-724 | B-724 | Polyimide | Amber | 0.375 (9.53) | 0.375 (9.53) | 500 | M61-R4310 |
| Fig. 29 | PTL-1-724 | B-724 | Polyimide | Amber | 0.375 (9.53) | 1.000 (25.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-16-724 | B-724 | Polyimide | Amber | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R4310 |
| Fig. 29 | PTL-4-724 | B-724 | Polyimide | Amber | 0.400 (10.2) | 0.400 (10.2) | 500 | M61-R4310 |
| Fig. 29 | PTL-6-724 | B-724 | Polyimide | Amber | 0.500 (12.7) | 0.275 (6.98) | 750 | M61-R4310 |
| Fig. 29 | PTL-17-724 | B-724 | Polyimide | Amber | 0.500 (12.7) | 4.000 (101.6) | 500 | M61-R4310 |
| Fig. 29 | PTL-9-724 | B-724 | Polyimide | Amber | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R4310 |
| Fig. 29 | PTL-13-724 | B-724 | Polyimide | Amber | 0.900 (22.86) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-25-724 | B-724 | Polyimide | Amber | 1.250 (31.75) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-27-724 | B-724 | Polyimide | Amber | 1.500 (38.1) | 0.125 (3.2) | 750 | M61-R4310 |
| Fig. 29 | PTL-28-724 | B-724 | Polyimide | Amber | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-2-724 | B-724 | Polyimide | Amber | 2.000 (50.8) | 0.250 (6.35) | 100 | M61-R4310 |
| B-727 Glossy Polyimide Material | | | | | | | | |
| Fig. 29 | PTL-14-727 | B-727 | Polyimide | White | 0.187 (4.7) | 4.000 (101.6) | 750 | M61-R6010 |
| Fig. 29 | PTL-10-727 | B-727 | Polyimide | White | 0.250 (6.35) | 0.750 (19.1) | 750 | M61-R6010 |
| Fig. 29 | PTL-3-727 | B-727 | Polyimide | White | 0.375 (9.53) | 0.375 (9.53) | 500 | M61-R6010 |
| Fig. 29 | PTL-1-727 | B-727 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-16-727 | B-727 | Polyimide | White | 0.375 (9.53) | 1.000 (25.4) | 500 | M61-R6010 |
| Fig. 29 | PTL-4-727 | B-727 | Polyimide | White | 0.400 (10.2) | 0.400 (10.2) | 500 | M61-R6010 |
| Fig. 29 | PTL-6-727 | B-727 | Polyimide | White | 0.500 (12.7) | 0.275 (6.98) | 750 | M61-R6010 |
| Fig. 29 | PTL-9-727 | B-727 | Polyimide | White | 0.650 (16.51) | 0.200 (5.1) | 750 | M61-R6010 |
| Fig. 29 | PTL-13-727 | B-727 | Polyimide | White | 0.900 (22.86) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-28-727 | B-727 | Polyimide | White | 1.500 (38.1) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-2-727 | B-727 | Polyimide | White | 2.000 (50.8) | 0.250 (6.35) | 100 | M61-R6010 |

Paper Material (B-424)

- **B-424 Paper Material:** White paper material with matte finish. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labeling applications.




Figure 29




Figure 40



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|------------------------------------|--------------|-------|----------|-------|----------------------------|-----------------------------|--------------------|-------------|
| B-424 General Purpose Paper | | | | | | | | |
| Fig. 29 | PTL-80-424 | B-424 | Paper | White | 0.750 (19.05) | 0.900 (22.9) | 250 | M61-R4310 |
| Fig. 40 | PTPSL-17-424 | B-424 | Paper | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-22-424 | B-424 | Paper | White | 1.000 (25.4) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-37-424 | B-424 | Paper | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-38-424 | B-424 | Paper | White | 1.900 (48.3) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 29 | PTL-20-424 | B-424 | Paper | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |
| Fig. 40 | PTPSL-20-424 | B-424 | Paper | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |

General identification materials

General ID Polyester (B-432, B-459, B-488 and B-489)

- **B-432 Polyester Material:** High performance clear glossy polyester, better adherence for rough surface applications.
- **B-459 Polyester Material:** White matte polyester.
- **B-488 Polyester Material:** White matte polyester with an aggressive adhesive.
- **B-489 Polyester Material:** White matte polyester with an aggressive adhesive.




Figure 29





Figure 33

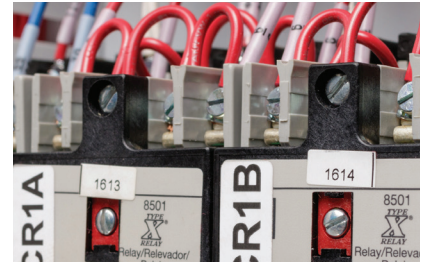

| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|-------------|-------|-----------|-------|----------------------------|-----------------------------|--------------------|-------------|
| B-432 Clear Polyester | | | | | | | | |
| Fig. 33 | PTL-101-432 | B-432 | Polyester | Clear | 0.250 (6.35) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-11-432 | B-432 | Polyester | Clear | 0.500 (12.7) | 0.750 (19.1) | 500 | M61-R6010 |
| Fig. 33 | PTL-8-432 | B-432 | Polyester | Clear | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 29 | PTL-10-432 | B-432 | Polyester | Clear | 0.750 (19.05) | 0.250 (6.4) | 750 | M61-R6010 |
| Fig. 29 | PTL-17-432 | B-432 | Polyester | Clear | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 33 | PTL-42-432 | B-432 | Polyester | Clear | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-43-432 | B-432 | Polyester | Clear | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| B-459 Permanent Polyester | | | | | | | | |
| Fig. 29 | PTL-29-459 | B-459 | Polyester | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-30-459 | B-459 | Polyester | White | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-20-459 | B-459 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |
| B-488 Ultra Aggressive Polyester | | | | | | | | |
| Fig. 29 | PTL-80-488 | B-488 | Polyester | White | 0.750 (19.05) | 0.900 (22.9) | 250 | M61-R4310 |
| Fig. 29 | PTL-97-488 | B-488 | Polyester | White | 0.900 (22.86) | 0.900 (22.9) | 250 | M61-R4310 |
| Fig. 29 | PTL-81-488 | B-488 | Polyester | White | 1.900 (48.26) | 0.250 (6.4) | 750 | M61-R4310 |
| Fig. 29 | PTL-78-488 | B-488 | Polyester | White | 1.900 (48.26) | 1.000 (25.4) | 250 | M61-R4310 |
| B-489 Ultra Aggressive Polyester | | | | | | | | |
| Fig. 33 | PTL-101-489 | B-489 | Polyester | White | 0.250 (6.35) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 33 | PTL-8-489 | B-489 | Polyester | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 29 | PTL-16-489 | B-489 | Polyester | White | 1.000 (25.4) | 0.375 (9.5) | 500 | M61-R4310 |
| Fig. 29 | PTL-17-489 | B-489 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-19-489 | B-489 | Polyester | White | 1.000 (25.4) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 33 | PTL-42-489 | B-489 | Polyester | White | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 33 | PTL-100-489 | B-489 | Polyester | White | 1.300 (33.02) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 29 | PTL-29-489 | B-489 | Polyester | White | 1.500 (38.1) | 0.500 (12.7) | 500 | M61-R4310 |
| Fig. 29 | PTL-30-489 | B-489 | Polyester | White | 1.500 (38.1) | 0.750 (19.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-31-489 | B-489 | Polyester | White | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R4310 |
| Fig. 29 | PTL-32-489 | B-489 | Polyester | White | 1.500 (38.1) | 1.500 (38.1) | 250 | M61-R4310 |
| Fig. 29 | PTL-37-489 | B-489 | Polyester | White | 1.900 (48.26) | 3.000 (76.2) | 100 | M61-R4310 |
| Fig. 29 | PTL-38-489 | B-489 | Polyester | White | 1.900 (48.26) | 4.000 (101.6) | 100 | M61-R4310 |
| Fig. 33 | PTL-43-489 | B-489 | Polyester | White | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4310 |
| Fig. 29 | PTL-20-489 | B-489 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R4310 |

Laboratory Materials (B-403 and B-7425)

- **B-403 Water Dissolvable Paper Material:** Paper material completely dissolves in warm water within 30 seconds, leaving no adhesive residue.
- **B-7425 Polypropylene Material:** Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers. Withstand temperature ranges from -320°F to 249.8°F (-196°C to 121°C). Chemical resistance to ethanol, DMSO, IPS, short term xylene, 10% formalin, 50% acetic acid and toluene




Figure 24




Figure 29




Figure 33



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Secondary Label Inch (mm) | Labels Per Roll | Rec. Ribbon |
|--------------------------------|---------------|--------|---------------|-------|----------------------------|-----------------------------|------------------------------|--------------------|-------------|
| B-403 Dissolvable Paper | | | | | | | | | |
| Fig. 33 | M61C-750-403 | B-403 | Paper | White | 0.750 (19.05) | 50 ft (15.24 m) | - | 1 roll (cont.) | M61-R4310 |
| Fig. 33 | M61C-1500-403 | B-403 | Paper | White | 1.500 (38.1) | 50 ft (15.24 m) | - | 1 roll (cont.) | M61-R4310 |
| B-7425 Polypropylene | | | | | | | | | |
| Fig. 24 | M61-98-7425 | B-7425 | Polypropylene | White | 1.000 (25.4) | 0.375 (9.5) | 0.375 (9.5) dia. | 500 | M61-R4310 |
| Fig. 29 | M61-31-7425 | B-7425 | Polypropylene | White | 1.500 (38.1) | 1.000 (25.4) | - | 250 | M61-R4310 |
| Fig. 29 | M61-121-7425 | B-7425 | Polypropylene | White | 1.900 (48.3) | 1.500 (38.1) | - | 100 | M61-R4310 |

General identification materials

General ID Vinyl (B-439)

- **B-439 Vinyl Material:** Colored vinyl material for thermal transfer printing. Ideal for rating plates, finished product identification, and general purpose labeling.




Figure 33



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|------------------------------|---------------|-------|----------|--------|----------------------------|-----------------------------|--------------------|--------------|
| B-439 Permanent Vinyl | | | | | | | | |
| Fig. 33 | PTL-8-439 | B-439 | Vinyl | White | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-42-439 | B-439 | Vinyl | White | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-43-439 | B-439 | Vinyl | White | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-8-439-YL | B-439 | Vinyl | Yellow | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-42-439-YL | B-439 | Vinyl | Yellow | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-43-439-YL | B-439 | Vinyl | Yellow | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-8-439-RD | B-439 | Vinyl | Red | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-42-439-RD | B-439 | Vinyl | Red | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-43-439-RD | B-439 | Vinyl | Red | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-8-439-OR | B-439 | Vinyl | Orange | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-42-439-OR | B-439 | Vinyl | Orange | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-43-439-OR | B-439 | Vinyl | Orange | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R6010 |
| Fig. 33 | PTL-8-439-BL | B-439 | Vinyl | Blue | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-42-439-BL | B-439 | Vinyl | Blue | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-43-439-BL | B-439 | Vinyl | Blue | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-8-439-GR | B-439 | Vinyl | Green | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-42-439-GR | B-439 | Vinyl | Green | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-43-439-GR | B-439 | Vinyl | Green | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-8-439-BK | B-439 | Vinyl | Black | 0.500 (12.7) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-42-439-BK | B-439 | Vinyl | Black | 1.000 (25.4) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |
| Fig. 33 | PTL-43-439-BK | B-439 | Vinyl | Black | 1.900 (48.26) | 50 ft (15.24 m) | 1 roll (cont.) | M61-R4410-WT |

Tamper-Indicating Material (B-351, B-7546 and B-7576)

- **B-351 Destructible Vinyl Material:** Destructible vinyl material prohibits one piece removal of label to indicate if the label has been tampered with.
- **B-7546 VOID Footprint Polyester Material:** Glossy white polyester leaves a "VOID" footprint when the label is removed to prevent it from being reused.
- **B-7576 Metallized VOID Polyester Material:** Matte white polyester leaves a "VOID" footprint when the label is removed. A "VOID" pattern will appear on the top surface of the label to prevent reuse.






Figure 29



| Diagram | Catalog # | B# | Material | Color | Label Width A Inch (mm) | Label Height B Inch (mm) | Labels Per Roll | Rec. Ribbon |
|---|-------------|--------|-----------|--------|----------------------------|-----------------------------|--------------------|-------------|
| B-351 Destructible Vinyl | | | | | | | | |
| Fig. 29 | PTL-17-351 | B-351 | Vinyl | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6210 |
| Fig. 29 | PTL-20-351 | B-351 | Vinyl | White | 1.000 (25.4) | 2.000 (50.8) | 100 | M61-R6210 |
| Fig. 29 | PTL-31-351 | B-351 | Vinyl | White | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6210 |
| Fig. 29 | PTL-37-351 | B-351 | Vinyl | White | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6210 |
| B-7546 VOID Footprint Polyester | | | | | | | | |
| Fig. 29 | PTL-17-7546 | B-7546 | Polyester | White | 1.000 (25.4) | 0.500 (12.7) | 500 | M61-R6010 |
| Fig. 29 | PTL-31-7546 | B-7546 | Polyester | White | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-20-7546 | B-7546 | Polyester | White | 2.000 (50.8) | 1.000 (25.4) | 100 | M61-R6010 |
| B-7576 Metallized VOID Polyester | | | | | | | | |
| Fig. 29 | PTL-20-7576 | B-7576 | Polyester | Silver | 1.000 (25.4) | 2.000 (50.8) | 100 | M61-R6010 |
| Fig. 29 | PTL-31-7576 | B-7576 | Polyester | Silver | 1.500 (38.1) | 1.000 (25.4) | 250 | M61-R6010 |
| Fig. 29 | PTL-37-7576 | B-7576 | Polyester | Silver | 1.900 (48.3) | 3.000 (76.2) | 100 | M61-R6010 |

BradyPrinter M611 print ribbons



BradyPrinter M611 Print Ribbons

Print ribbons for the BradyPrinter M611 are supplied in cartridge form and easily fit into the side of the printer and do not unravel or roll away when outside the printer.

Using the correct material and ribbon pair is critical in creating durable, long-lasting and smear-proof print. Use our Ribbon Compatibility Guide on the next page to help determine which ribbon is best suited for your material.

| Material | Color | Description | Ribbon Size |
|------------------------|-------|---------------------|------------------------------------|
| Black Ribbons | | | |
| M61-R4310 | Black | R4300 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6010 | Black | R6000 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6210 | Black | R6200 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6410 | Black | R6410 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6610 | Black | R6600 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| Colored Ribbons | | | |
| M61-R4410-WT | White | R4400 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6710-WT | White | R6710 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R6810-WT | White | R6800 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R4410-RD | Red | R4400 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |
| M61-R4410-BL | Blue | R4400 Series Ribbon | 2 in. x 75 ft. (50.8 mm x 22.85 m) |




How many labels print per ribbon?

Have you ever wondered approximately how many labels you can print from one BradyPrinter M611 ribbon? Try this formula:

(Note: Our standard BradyPrinter M611 ribbons are 900 in. (75 ft) long.)

- Step 1:** label height + 0.10 = X
- Step 2:** 900 inches ÷ X = total labels per ribbon

Example: Part Number PLT-19-422 is 1.0" tall
 1.0 inch label height + 0.10 = 1.10
 900 inches ÷ 1.10 = **818 labels per ribbon**

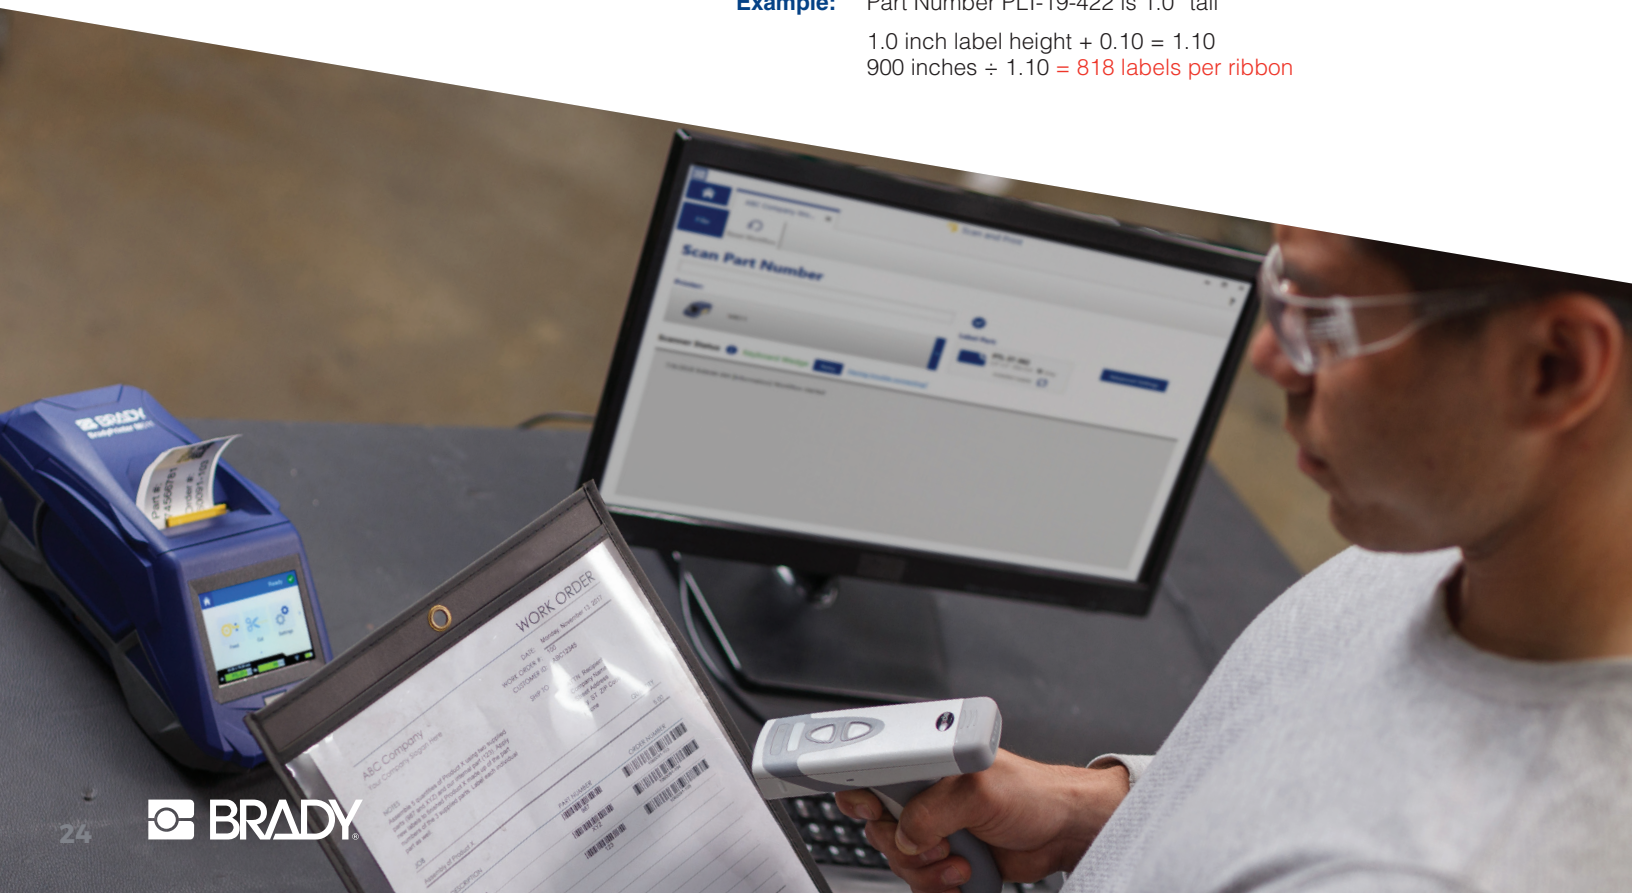

BradyPrinter M611 print ribbons compatibility

Using the correct material and ribbon pair is critical in creating durable, long-lasting and smear-proof print. Use the following guide to determine which BradyPrinter M611 ribbon part is best suited for the label material you are using.

| B-# Material | | M61-R4310 (Black) | M61-R6010 (Black) | M61-R6210 (Black) | M61-R6410 (Black) | M61-R6610 (Black) | M61-R4410-WT (White) | M61-R6710-WT (White) | M61-R6810-WT (White) | M61-R4410-RD (Red) | M61-R4410-BL (Blue) |
|--------------|---------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-------------------------|-------------------------|-------------------------|-----------------------|------------------------|
| B-109 | Polyethylene tag | ● | | ● | | | | | | | |
| B-145 | Polyethylene tag | | ● | | | | | | | | |
| B-145FR | Polyethylene tag | | ● | ▲ | | | | | | | |
| B-321 | Polyolefin | | | ● | | | | | | | |
| B-342 | Permasleeve® polyolefin | ● | | | | ● | | ▲ | | | |
| B-344 | Permasleeve® polyolefin | | ● | | | ● | | ▲ | | | |
| B-345 | Permasleeve® high temp polyolefin | | ● | | | ● | | | | | |
| B-351 | Destructible vinyl | | ● | ● | | | ▲ | | ▲ | | |
| B-352 | Destructible vinyl | | ● | | | | | | | | |
| B-362 | Destructible vinyl | | ● | | | | | | | | |
| B-390 | Durasleeve® polypropylene | | ● | ▲ | | ● | | | | | |
| B-403 | Dissolvable paper | ● | | | | | | | | | |
| B-412 | Polypropylene tag | ● | | ● | | | | | | | |
| B-422 | Polyester | | ● | | | | ● | | | ▲ | ▲ |
| B-423 | Polyester | | ● | | | | ● | | | ▲ | ▲ |
| B-424 | Paper | ● | | | | | | | | | |
| B-425 | Polypropylene | ● | | ● | | | | | | | |
| B-427 | Self-laminating vinyl | ● | | | | | | | | | |
| B-428 | Polyester | ● | | | | | | | | | |
| B-430 | Polyester | | ● | ● | | | ▲ | | | ▲ | ▲ |
| B-432 | Polyester | | ● | | | | ● | | | ▲ | ▲ |
| B-435 | Polyester | | ● | | | | | | | | |
| B-437 | Self-extinguishing polyvinyl fluoride | ● | | ● | | | | | | | |
| B-439 | Vinyl | | ● | | | | ● | | | ▲ | ▲ |
| B-459 | Polyester | | ● | | | | | | | | |
| B-461 | Self-laminating polyester | ● | | ● | | | | | | | |
| B-473 | Polyester | | ● | | | | | | | | |
| B-483 | Polyester | | ● | | | | | | | | |
| B-486 | Polyester | ● | | | | | | | | | |
| B-488 | Polyester | ● | | | | | | | | | |
| B-489 | Polyester | ● | | | | | | | | | |
| B-490 | Freezerbondz™ polyester | ● | | | | | | | | | |
| B-498 | Vinyl cloth | ● | ▲ | ▲ | | ● | | | | | |
| B-499 | Nylon cloth | ● | | ● | | | | | | | |
| B-593 | Polyester - eprep | | ● | | | | ● | | | ▲ | ▲ |
| B-642 | Self-extinguishing polyvinyl fluoride | ● | | ● | | | | | | | |
| B-717 | Polyimide | | ● | | | | | | | | |
| B-718 | Polyimide | | ● | | | | | | | | |
| B-719 | Polyimide | | ● | | | | | | | | |
| B-724 | Polyimide | ● | | | | | | | | | |
| B-727 | Polyimide | | ● | | | | | | | | |
| B-7351 | Void print vinyl | | ● | | | | | | | | |
| B-7425 | Polypropylene | ● | | | | | | | | | |
| B-7546 | Void print polyester | | ● | | | | | | | | |
| B-7551-CL | Polyester | | | ● | | | | | | | |
| B-7576 | Void print polyester | | ● | | | | | | | | |
| B-7593 | Polyethylene - eprep | | ● | | | | ● | | | ▲ | |
| B-7597 | Polyethylene | ● | | | | | | | | | |
| B-7599-YL | Polyethylene tag | | | ● | | | | | | | |
| B-7643 | Thermoplastic polyether polyurethane | | ● | | | | | | | | |
| B-7696 | Vinyl tag | | ● | ● | | | | | | | |
| B-8425 | Polypropylene | | ● | | | | | | | | |

View BradyID.com/techdata for TDS sheets on ribbon performance specifications.








Note: Colored ribbon choice dependent upon material color.

- Recommended ribbon for use with respective material
- ▲ Acceptable ribbon for use with respective material

Keep working with convenient accessories

Adapt to a variety of working conditions. The BradyPrinter M611 Mobile Printer has a variety of accessories available to make sure you can get through your work more easily.

Printer and Accessories

| Catalog # | Description | Catalog # | Description |
|--|---------------------------------------|--|--------------------------------|
|  M611-AM-BT-W | BradyPrinter M611 Bluetooth/Wi-Fi AC* |  BMP-STRAP-1 | Carrying strap |
|  BMP-MAGNET-2 | Magnet for BradyPrinter M611 |  M-AC-143110 | AC adapter and battery charger |
|  BMP-HC-2 | Hard case for BradyPrinter M611 |  PCK-5 | Cleaning kit 5-pack |
|  BMP-PACK-2 | Sling pack for BradyPrinter M611 | * Printer ships with AC adapter/battery charger, USB 2.0 cable, utility strap, PTL-97-488 label material, M61-R4310 ribbon and USB flash drive with product information. | |



BradyPrinter M611 printer specifications

| Printer | |
|-----------------------------------|---|
| Printer Name | BradyPrinter M611 |
| Print Resolution | Thermal transfer, 300 dpi |
| Max Lines of Print | 25 |
| Print Speed | 1.33 in. / sec. (33.8 mm / sec) |
| Keyboard Type | Peripheral only, no keyboard |
| Dimensions in. (mm) | 10.974 in. L x 4.459 in. W x 4.553 in. H (278.75 mm x 113.27 mm x 115.66 mm) |
| Weight | Weight 3.52 lbs (equipped with supplied media and ribbon) |
| Warranty | 2 years |
| Overmold/Rugged | Yes, base |
| Operating Temp | 40 to 120° F (5 to 49° C) |
| Humidity | 10% to 90% (non-condensing) |
| Storage Temp | -24 to 140° F (-30 to 60° C) |
| Continuous or Die Cut Labels | Continuous and die cut |
| Portability | Portable |
| Features | |
| Memory | 512 MB RAM / 256 MB Flash |
| Cutter Type | Automatic |
| Cut Options | Cut between labels or at end of print job |
| Label Retention After Cut | No |
| Labels Per Day (Average) | 750 |
| Battery Life Indicator | Yes |
| Label Odometer (Supply Remaining) | Media and ribbon |
| Error Messaging | On LCD touchscreen |
| Wearability Options | Integrated sling pack |
| Drop Test | Drop tested to spec MIL-STD-810G: four foot drop |
| Languages | English, French, Spanish, Portuguese |
| Power | |
| Power Supply | Rechargeable Li-Ion, AC power/battery charger/ car charger |
| Battery Included | Yes, not removable |
| Battery Life (average) | 3,000 labels |
| Rechargeable Battery | Yes, internal Li-Ion (3200 mAh) |
| Re-Charge Time (estimated) | 4.5 hours |
| Charging Options | Internal |
| Power Source Voltage | 110-240V |
| Auto Shut Off | User configurable 5-30 minutes |
| Display | |
| LCD Type / Size | Custom LCD, color, 3.5 in. (88.9 mm) QVGA |
| LCD Resolution | 320 x 240 pixels |
| LCD Characters | Font size dependent |
| LCD Backlight | Yes, user configurable |

| Communication and Interface | |
|-----------------------------|---|
| Connectivity | Bluetooth, Wi-Fi, USB 2.0 |
| PC Connectivity | USB cable, wireless |
| Import Data | No |
| Software Compatibility | Required: Brady Workstation Express Labels Mobile App (iOS/Android) or Brady Workstation Desktop |
| Media | |
| Type | Ribbon and tape separate, also bulk rolls |
| Load Labels Location | Top |
| Label Output Location | Top |
| Compatible Media | BPTL, BPTDS, BPSPT, BPTLTB, PTL, PSHT, PTLEP, PTS, PTLFP, PSPT, PTPSL, PSFR, PTPS, PTLSL, BM71, M61, M61C, BM61C, custom available |
| Memory in Cartridge | Yes |
| Maximum Print Width | 1.92 in. (48.76 mm) |
| Maximum Print Length | 40.00 in. (1016 mm) |
| Maximum Liner Width | 2.25 in. (57 mm) with liner |
| Media Widths | Various sizes from 0.235 to 2.00 in. (6.4 to 50.8 mm) |
| Minimum Media Width | 0.235 in. (5.969 mm) |
| Minimum Label Height | 0.236 in. (5.99 mm) |
| Liner Width | 0.812 in., 1.062 in., 1.312 in., 1.562 in., 1.812 in., 2.250 in. (20.624 mm, 26.974 mm, 33.324 mm, 39.674 mm, 46.024 mm, 57.15 mm) |
| Included Media | PTL-97-488, M61-R4310 |
| Number of Stock Parts | 600+ |
| Color Print Capability | Single print color on a label |
| Available Media Colors | Media: white, yellow, gray, green, orange, red, clear, silver, blue, brown, purple, clear Ribbon: black, white, blue and red |
| Ribbons | Compatible ribbons begin with M61-Rxxx |
| Cartridge Width Detection | Yes, from software |
| Cartridge Setting Detection | Yes, from software |
| Custom Labels Available | Yes |
| Compliance | |
| Agency Approvals | FCC Class A, UL WLAN 1EEE, 802.11 b/g/n, Jamaica: SMA-M611 and Bluetooth Classic |
| Trade | Harmonization Code: (HTS Schedule A or B) /844.39.9000, Country of origin, Malaysia (printer), ECCN: EAR99 |
| MSDS | For MSDS visit www.BradyID.com |
| Fonts, Graphics, Symbols | |
| Font | Yes, driven by software |
| Text Sizes | Yes, driven by software |
| Number of Fonts | Yes, driven by software |
| Number of Symbols | Yes, driven by software |
| Special Characters | Yes, driven by software |
| Symbols | Yes, driven by software |

We identify and protect premises, products and people.

For more information or to learn more about our innovative products, visit BradyID.com or call 1-888-272-3946.



Y4676565 MS4676565

© 2018 Brady Worldwide Inc. ALL RIGHTS RESERVED

USA
Customer Service: 1-888-272-3946
Inside Sales: 1-888-311-0775
BradyID.com

Canada
Customer Service: 1-800-263-6179
BradyCanada.ca

Mexico
Customer Service: 1-800-262-7777
Inside Sales: 1-800-262-7777 ext 177
BradyLatinAmerica.com

