


T340E686M025AT7301

Aliases (T340E686M025ATTR)

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 68 uF, 20%, 25 VDC, 900 mOhms, Lead Spacing = 10mm

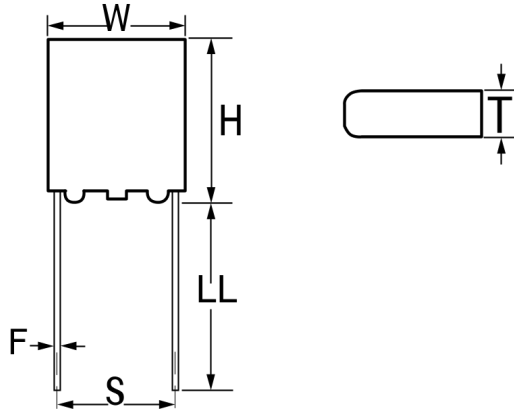

Click [here](#) for the 3D model.

Dimensions

W	12.3mm MAX
H	10.5mm MAX
T	12.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm

Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	150

General Information

Series	T340
Dielectric	MnO ₂ Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications

Capacitance	68 uF
Capacitance Tolerance	20%
Voltage DC	25 VDC (85C), 16 VDC (125C), 0.25 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Resistance	0.9 Ohms (100kHz)
Leakage Current	10 uA