


# molex

**INSULATION DISPLACEMENT CABLE:**  
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

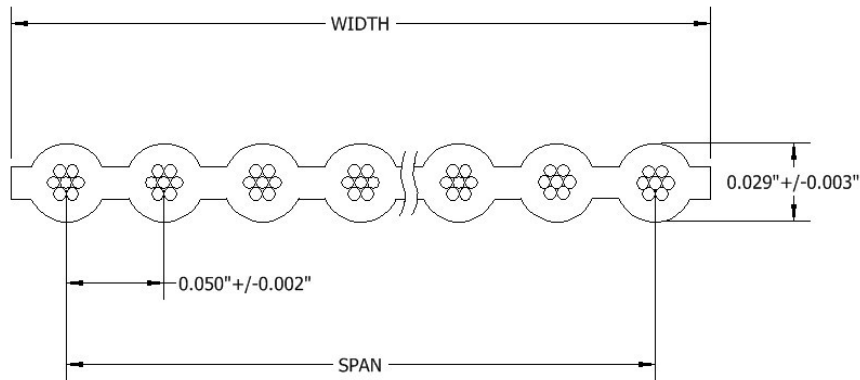

Cond. No.	Part Number	Span	Width
4	1000570374	0.150" ± 0.005"	0.200" ± 0.007"
5	1000570067	0.200" ± 0.005"	0.250" ± 0.007"
6	1000570375	0.250" ± 0.005"	0.300" ± 0.007"
8	1000570376	0.350" ± 0.007"	0.400" ± 0.007"
9	1000570396	0.400" ± 0.007"	0.450" ± 0.007"
10	1000570377	0.450" ± 0.007"	0.500" ± 0.007"
16	1000570378	0.750" ± 0.007"	0.800" ± 0.007"
20	1000570379	0.950" ± 0.010"	1.000" ± 0.010"
26	1000570176	1.250" ± 0.010"	1.300" ± 0.010"
50	1000570205	2.450" ± 0.010"	2.500" ± 0.010"

CHARACTERISTICS	
<b>Conductor</b>	28 AWG, 7/36, Silver Plated Copper
<b>Insulation</b>	FEP
<b>Color</b>	Blue
<b>Impedance (ohms)</b>	115 Unbalanced   165 Balanced
<b>Capacitance (pF/ft)</b>	10.5 Unbalanced   6.0 Balanced
<b>Inductance (uH/ft)</b>	0.14 Unbalanced   0.16 Balanced
<b>Insulation Resistance (Mohm)</b>	>500
<b>Voltage Rating</b>	300V
<b>Temperature Rating</b>	-55°C to 200°C

**STANDARD PACKAGING**  
100 ft./spool, 10 Ft. minimum length

**UL STYLE 20424**