


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

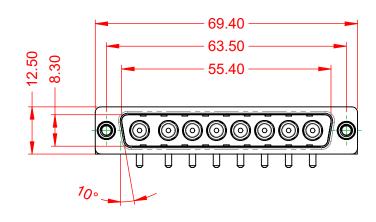




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTAC 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

СТ

	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION			DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-8W8-	240-1N6	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-8W8-	240-1N6	1		

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

