Data sheet

3RV2021-4DA20-0BA0



Special type Circuit breaker size S0 for motor protection, CLASS 10 Arelease 18...25 A N-release 325 A Spring-type terminal Standard switching capacity Ambient temperature -50 $^{\circ}\text{C}$ 500 switching cycles

product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For motor protection	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S0	
size of contactor can be combined company-specific	S00, S0	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	10.5 W	
at AC in hot operating state per pole	3.5 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25g / 11 ms	
mechanical service life (switching cycles)		
 of the main contacts typical 	500	
of auxiliary contacts typical	500	
electrical endurance (switching cycles) typical	500	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
during operation	-50 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current-dependent overload release	18 25 A	
operating voltage		
rated value	20 690 V	
at AC-3 rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	25 A	
operational current		
at AC-3 at 400 V rated value	25 A	
operating power		

-4.40.0	
• at AC-3	5.5.144
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	15 kW
— at 690 V rated value	22 kW
operating frequency	
at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (Icu)	
• at AC at 240 V rated value	50 kA
• at AC at 400 V rated value	50 kA
• at AC at 500 V rated value	10 kA
• at AC at 690 V rated value	4 kA
breaking capacity operating short-circuit current (Ics)	
at AC • at 240 V rated value	25 kA
at 400 V rated value	25 kA
at 500 V rated value at 500 V rated value	5 kA
at 690 V rated value at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip	325 A
unit	323 A
Short-circuit protection	
Short-circuit protection product function short circuit protection	Yes
	Yes magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	magnetic gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 63 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	magnetic gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions	gG 63 A gG 50 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 63 A gG 50 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions	gG 63 A gG 50 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards upwards at the side for grounded parts at 500 V	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 119 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm 9 mm

— upwards	30 mm	
— at the side	9 mm	
 for grounded parts at 690 V 		
— downwards	50 mm	
— upwards	50 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
 for live parts at 690 V 		
— downwards	50 mm	
— upwards	50 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
Connections/ Terminals		
type of electrical connection		
for main current circuit	spring-loaded terminals	
arrangement of electrical connectors for main current	Top and hottom	

Commodition Formulation	
type of electrical connection	
for main current circuit	spring-loaded terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
 for main contacts 	
— solid or stranded	2x (1 10 mm²)
 finely stranded with core end processing 	2x (1 6 mm²)
 finely stranded without core end processing 	2x (1 6 mm²)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
Safety related data	
T1 value for proof test interval or service life according to IEC 61508	10 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle

display version for switching status

Certificates/ approvals

Handle

Confirmation

General Product Approval

<u>KC</u>





Declaration of Conformity

Type Test Certificates/Test Report

Test Certificates

Test Certificates

Marine / Shipping

Special Test Certificate











Marine / Shipping

other

Railway

Confirmation

Vibration and Shock

RINA



Confirmation



Further informatio

Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4DA20-0BA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4DA20-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4DA20-0BA0

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4DA20-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4DA20-0BA0&objecttype=14&gridview=view1

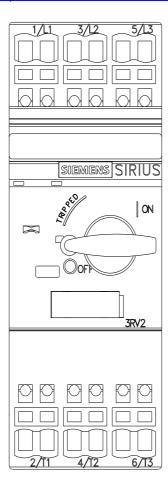

last modified: 6/25/2022 C