

Common Mode Line Filter

ALFT-09V



RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

FEATURES:

- Presents High Common Mode Impedance
- Enables significant noise suppression at high frequency

APPLICATIONS:

- Filtering common mode noise in USB, IEEE1394, LVDS, Digital Camera, Scanner.
- Digital audio and video equipments such as PDA, DSC, DVC, DVD Player.

ELECTRICAL SPECIFICATIONS:

Part Number ALFT-09V-Inductance Code	L (mH) min.	DCR Max (Ω)	I_r (A_{rms})
ALFT-09V-501	0.5	0.2	1.4
ALFT-09V-102	1.0	0.4	1.0
ALFT-09V-202	2.0	0.8	0.7
ALFT-09V-502	5.0	1.6	0.5
ALFT-09V-802	8.0	2.5	0.4
ALFT-09V-103	10.0	3.6	0.3

Test Conditions

Hipot: 1500V_{RMS}/60Hz/3mA/3sec

I_r : Based on temperature rise at 40°C max


Operating Temperature

-40°C to +125°C


Storage Temperature

-40°C to +125°C

Common Mode
Measuring circuit :



Differential Mode
Measuring circuit :




ELECTRICAL CHARACTERISTICS:


ALFT-09V-501




ALFT-09V-202




ALFT-09V-102



ALFT-09V-103

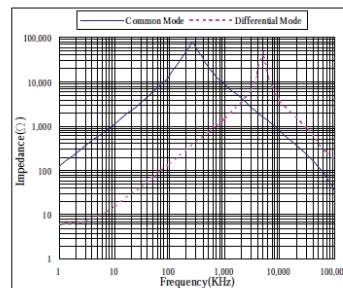

Common Mode Line Filter







16.5 x 11.5 x 17.0mm


ALFT-09V



RoHS/RoHS II Compliant

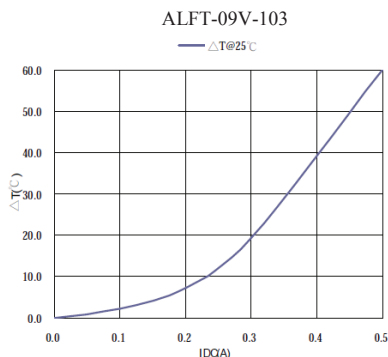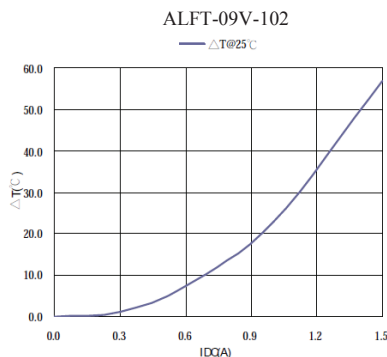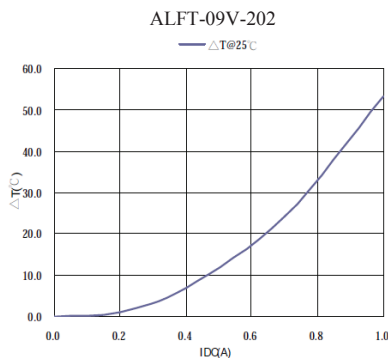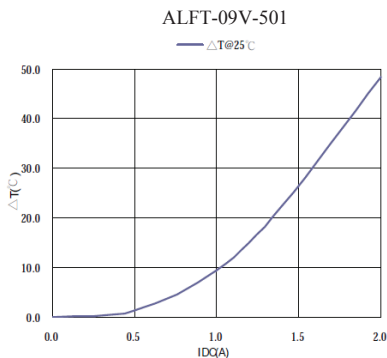

OUTLINE DRAWING:

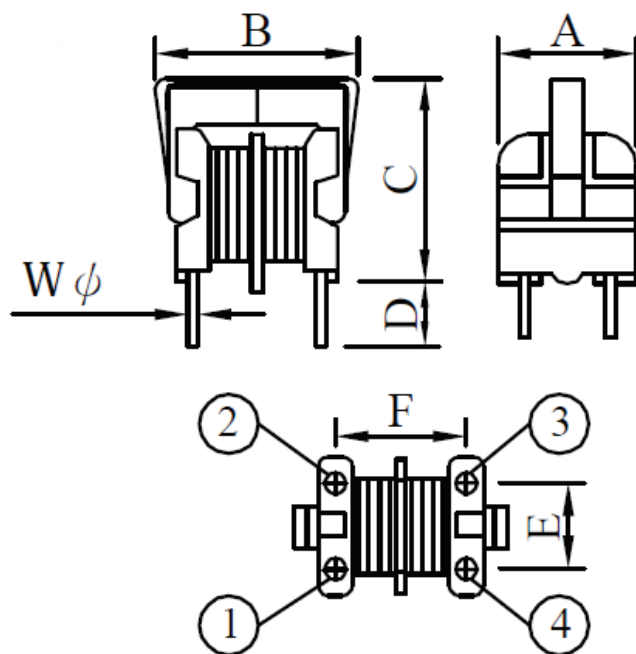

A	B	C	D	E	F	WΦ
11.5 max	16.5 max	17.0 max	5.0 ±1.0	7.0 ±0.5	8.0 ±0.5	0.6 ±0.05

Dimensions: mm

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 01.02.14

Common Mode Line Filter

ALFT-09V



RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

SCHEMATICS



Packing 288pcs/Box

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 01.02.14