## **SIEMENS**

## **Data sheet**



Special type Circuit breaker size S00 for motor protection, CLASS 10 A-release 10...16 A N-release 208 A screw terminal Standard switching capacity Ambient temperature -50  $^{\circ}$ C 500 switching cycles

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	9.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	500
of auxiliary contacts typical	500
electrical endurance (switching cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-50 +60 °C
<ul><li>during storage</li></ul>	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	10 16 A
operating voltage	
• rated value	20 690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	16 A
operational current	
• at AC-3 at 400 V rated value	16 A
operating power	

1400			
• at AC-3	4111		
— at 230 V rated value	4 kW		
— at 400 V rated value	7.5 kW		
— at 500 V rated value	7.5 kW		
— at 690 V rated value	11 kW		
operating frequency			
at AC-3 maximum	15 1/h		
Auxiliary circuit			
number of NC contacts for auxiliary contacts	0		
number of NO contacts for auxiliary contacts	0		
number of CO contacts for auxiliary contacts	0		
Protective and monitoring functions			
product function			
ground fault detection	No		
phase failure detection	Yes		
trip class	CLASS 10		
design of the overload release	thermal		
breaking capacity maximum short-circuit current (Icu)			
at AC at 240 V rated value	100 kA		
• at AC at 400 V rated value	55 kA		
• at AC at 500 V rated value	10 kA		
at AC at 690 V rated value	4 kA		
breaking capacity operating short-circuit current (Ics)			
at AC			
<ul> <li>at 240 V rated value</li> </ul>	100 kA		
<ul> <li>at 400 V rated value</li> </ul>	30 kA		
<ul> <li>at 500 V rated value</li> </ul>	5 kA		
at 690 V rated value	2 kA		
response value current of instantaneous short-circuit trip	208 A		
unit			
Short-circuit protection			
	Yes		
Short-circuit protection	Yes magnetic		
Short-circuit protection product function short circuit protection			
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit			
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V	magnetic gG 80 A		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V	magnetic  gG 80 A gG 63 A		
product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V	magnetic  gG 80 A  gG 63 A  gG 50 A		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions	magnetic  gG 80 A  gG 63 A  gG 50 A		
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  at 240 V  at 400 V  at 500 V  at 690 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715		
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V • at 400 V • at 500 V • at 690 V  Installation/ mounting/ dimensions mounting position	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm		
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions mounting position fastening method  height width depth	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm		
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions mounting position fastening method  height width depth	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm		
product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method  height width depth  required spacing • for grounded parts at 400 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method  height  width depth  required spacing  • for grounded parts at 400 V  — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715  97 mm 45 mm 97 mm 30 mm 30 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715  97 mm 45 mm 97 mm 30 mm 30 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards  — upwards  — at the side  • for live parts at 400 V  — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards — upwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V  — downwards — upwards — upwards — upwards — upwards — at the side	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V  — downwards — upwards — upwards — upwards — at the side  • for grounded parts at 500 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 9 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards  — upwards  — at the side  • for live parts at 400 V  — downwards  — upwards  — at the side  • for grounded parts at 500 V  — downwards  — at the side  • for grounded parts at 500 V  — downwards	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm  30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm		
Short-circuit protection  product function short circuit protection  design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 240 V  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts at 400 V  — downwards — upwards — at the side  • for live parts at 400 V  — downwards — upwards — upwards — upwards — at the side  • for grounded parts at 500 V	magnetic  gG 80 A gG 63 A gG 50 A gG 40 A  any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 9 mm		

— downwards	30 mm	
— upwards	30 mm	
— at the side	9 mm	
• for grounded parts at 690 V		
— downwards	50 mm	
— upwards	50 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
• for live parts at 690 V		
— downwards	50 mm	
— upwards	50 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
Connections/ Terminals		
type of electrical connection		
for main current circuit	screw-type terminals	
arrangement of electrical connectors for main current circuit	Top and bottom	
type of connectable conductor cross-sections		
for main contacts		
<ul><li>— solid or stranded</li></ul>	2x (0,75 2,5 mm²), 2x 4 mm²	
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
tightening torque		
for main contacts with screw-type terminals	0.8 1.2 N·m	
design of screwdriver shaft	Diameter 5 to 6 mm	
size of the screwdriver tip	Pozidriv size 2	
design of the thread of the connection screw		
<ul> <li>for main contacts</li> </ul>	M3	
Safety related data		
T1 value for proof test interval or service life according to IEC 61508	10 y	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
display version for switching status	Handle	
Certificates/ approvals		
General Product Approval	Declaration of Conformity	Test Certificates
Confirmation KC	UK ce	Special Test Certificate







<u>ate</u>

**Test Certificates** 

Marine / Shipping

Type Test Certificates/Test Report











Marine / Shipping

other

Railway





Confirmation



Confirmation

Vibration and Shock

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-4AA10-0BA0

## Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-4AA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-4AA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-4AA10-0BA0&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-4AA10-0BA0&lang=en</a>


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-4AA10-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-4AA10-0BA0&objecttype=14&gridview=view1

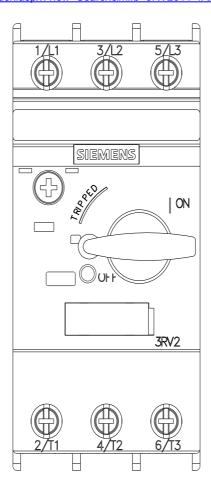

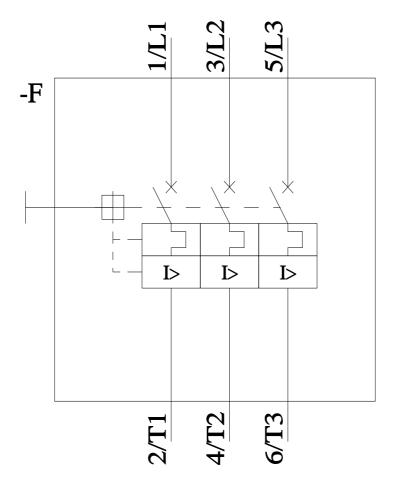

last modified: 6/25/2022 🖸