DWG NO 1891312-1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

USED ON

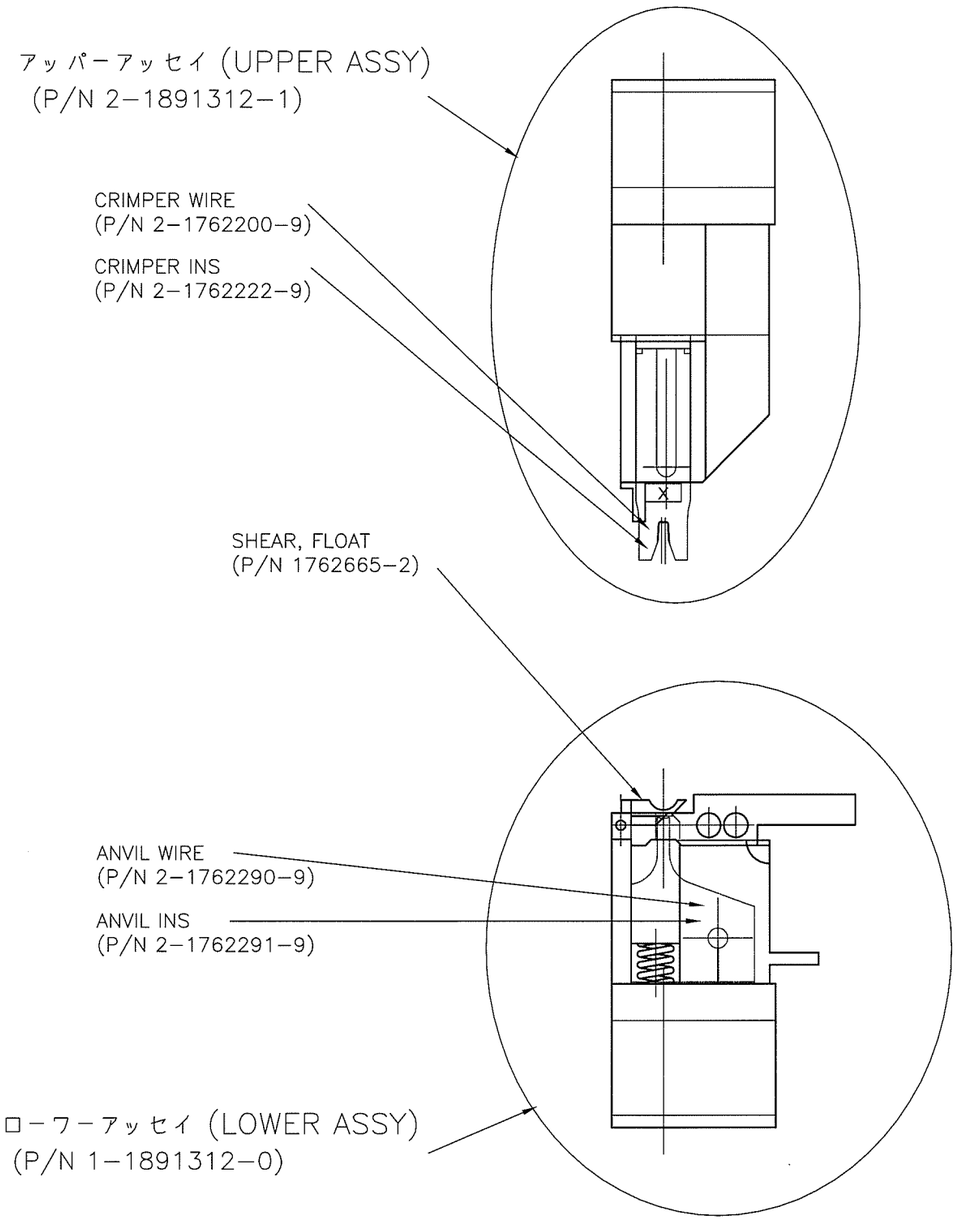

仕様 (Specifications)

(1) 適用端子 (APPLICABLE TERMINAL) : AMP 064-REC P/N 1674311-1

(2) 適用ワイヤー (APPLICABLE WIRE) : AVSS 0.3sq/(AWG22)

(3) 圧着規格 (CRIMP SPEC) : WIRE C/H 0.76± 0.05mm
INSULATION C/H 1.85mm± 0.1mm

(4) 外観寸法 (OVERALL) : UPPER ASSY W27× H79× D23
LOWER ASSY W40× H60× D30

(5) 重量 (WEIGHT) : UPPER ASSY 0.15kg
LOWER ASSY 0.14kg

THIS INFOMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

LOC J
DIST

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	RELEASED	18 JAN 06	K.M	S.Y

THIRD ANGLE PROJECTION.
DIMENSIONS IN MILLIMETERS.
DO NOT SCALE PRINT.

TOLERANCES UNLESS OTHERWISE SPECIFIED.

ANGLES ±0°30'
UP TO 6 ±0.1 120 TO 315 ±0.5
6 TO 30 ±0.2 315 TO 1000 ±0.8
30 TO 120 ±0.3 OVER 1000 ±1.2
REMOVE BURRS, BRAKE SHARP EDGES R0.4 MAX.

MATERIAL	HEAT TREAT	FINISH
//	//	//

DR 18 JAN 06 K.MARUYAMA	APP 18 JAN 06 S. YABE	tyco Electronics — Tyco Electronics AMP K.K. Kawasaki, Japan
CHK 18 JAN 06 K.MARUYAMA	REL 18 JAN 06 S. YABE	

名称 (NAME) (S2P1 MICRO APPLICATOR, AMP 064-R)
AMP 064-R スマート2ピース1マイクロアプリケーター

SCALE	SIZE	DRAWING NO	SHEET	REV
//	A3	1891312-1	1 OF 1	A

(CUSTOMER DRAWING) 顧客用図面