
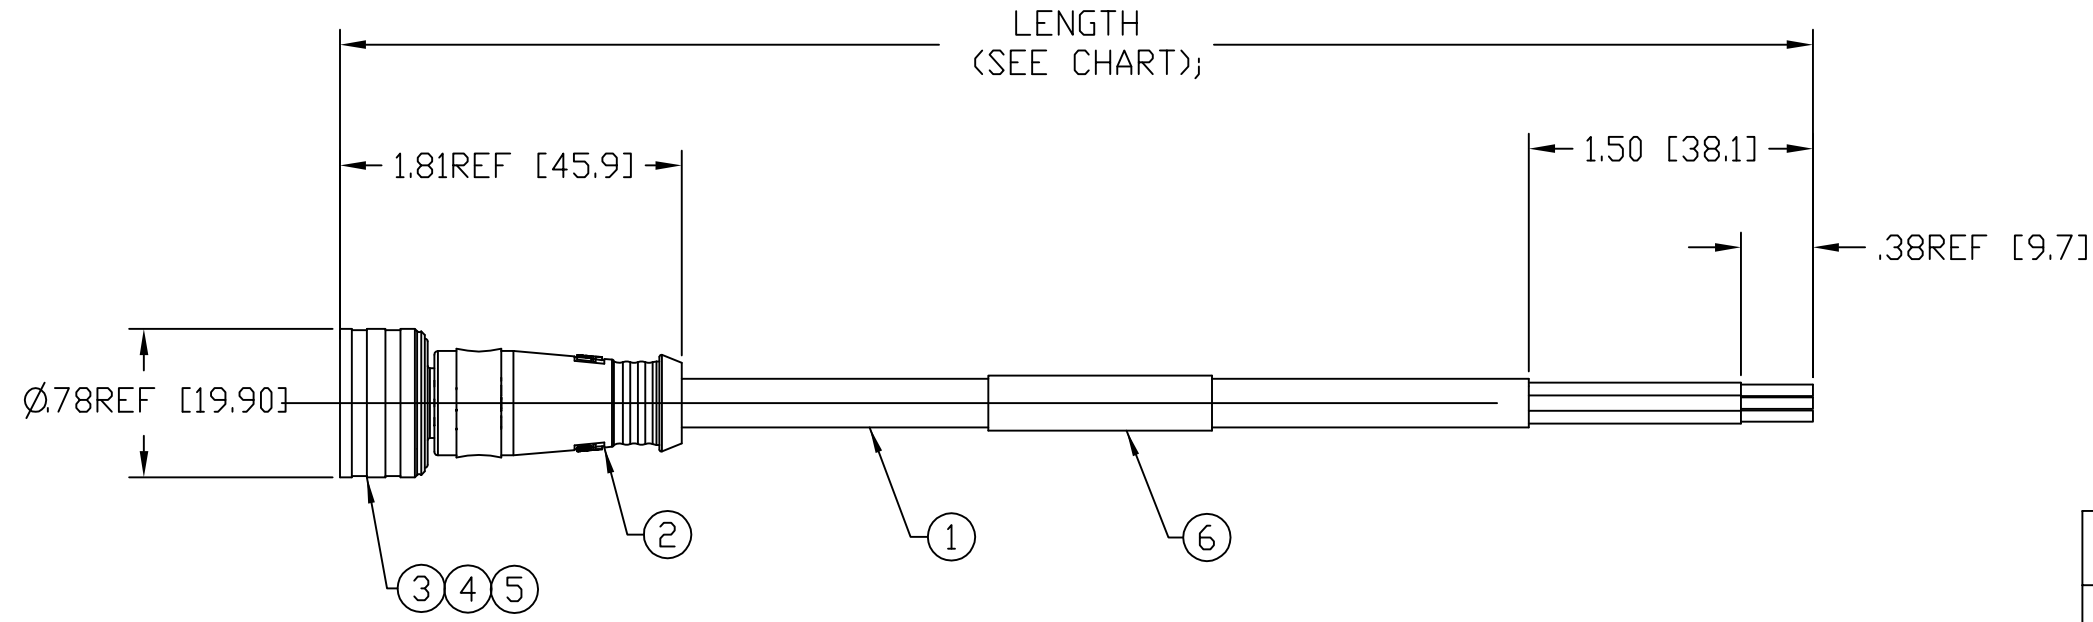
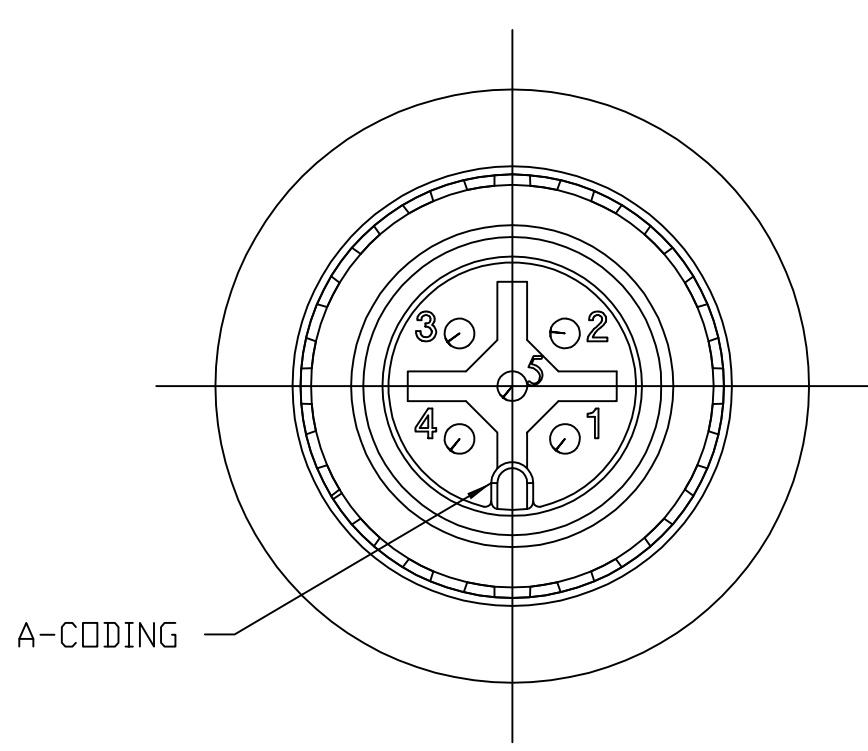


PART NUMBER	ENGINEERING NO.	LENGTH
1200790092	W05006A09M020	6' 6" +3.5" - 0 [2M +90MM - 0]
1200790091	W05006A09M040	13' 1" +6" - 0 [4M +150MM - 0]
1200790090	W05006A09M050	16' 4" +6" - 0 [5M +150MM - 0]
1200790089	W05006A09M060	19' 7" +6" - 0 [6M +150MM - 0]
1200790088	W05006A09M100	32' 4" +12 - 0 [10M +300MM - 0]

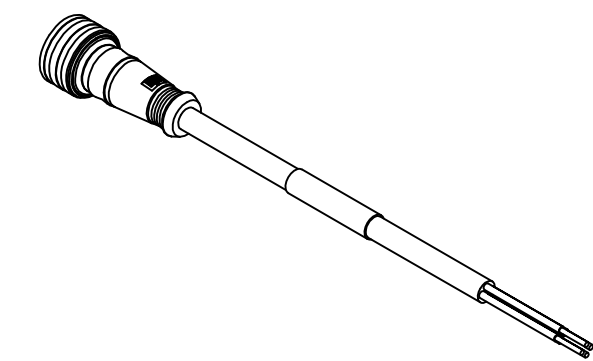

P1	
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	GRAY

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE.
 - 4) MATES WITH: MICRO CHANGE, 5 POLE RECEPTACLE
 - 5) ELECTRICAL DATA:
 INLINE CORDSET
 MALE A-CODING WITH FLYING LEADS
 22AWG UNSHIELDED
 POLES: 5
 MAX. VOLTAGE: 250V
 MAX. CURRENT 4A
 CONTACT RESISTANCE: <5M Ωhm
 PROTECTION IP67/68/69K
 TEMPERATURE RANGE:-25°C TO 90°C
 - 6) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATELY
 IN POLY BAGS WITH BAR CODE LABEL ATTACHED
 TO OUTSIDE OF BAG.
 - 7) ASSEMBLY IS RoHS COMPLIANT.
 - 8) CERTIFICATION
 cCSAus

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	5	PIN CONTACT	COPPER ALLOY	GOLD PLATED
4	1	INSERT	PUR	BLACK
3	1	COUPLING NUT	BRASS	NICKEL PLATED
2	1	OVERMOLD	PUR	YELLOW
1	1	CABLE, 22AWG-5	PVC JACKET	YELLOW

RELEASE EC NO: WEU2010-0003 DRWN: TWOLDEGE 7/1/09 CH'KD: BWOODMAN APPR: JFMURPHY 2009/07/20	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE ----	SCALE ----	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ±---- ±---- 3 PLACES ±---- ±---- 2 PLACES ±---- ±---- 1 PLACE ±---- ±----	mm INCH ±---- ±---- ±---- ±---- ±---- ±---- ±---- ±----	DRAWN BY DATE TWOLDEGE 2009/07/01	TITLE MICRO CHANGE ULTRA LOCK 5-POLE MALE STRAIGHT 22/5 AWG PVC			
		ANGULAR ±----°		CHECKED BY DATE BWOODMAN 2009/07/01	MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-120079-006	SHEET NO. 1 OF 1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION