


| ITEM | MPN | DESCRIPTION | QTY | UOM |
|------|------------|-----------------------------------------|-----|-----|
| A | 2008900106 | Edgeloock 6-ckt Hsg for 1.6mm PCB Thick | 1 | PC |
| C | 2004490001 | EDGELOCK CRIMP TERMINAL - TIN PLATED | 6 | PC |
| D | 884260070 | PAPER PRINTED PAPER WHITE (S100X150YAJ) | 1 | PC |

| FROM | TO | DESCRIPTION | COLOR |
|------|----|------------------------------------------|-------|
| A1 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | BLACK |
| A2 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | |
| A3 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | |
| A4 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | |
| A5 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | |
| A6 | -- | 1X22AWG DISC SR-PVC BK OD=1.22MM UL10002 | |

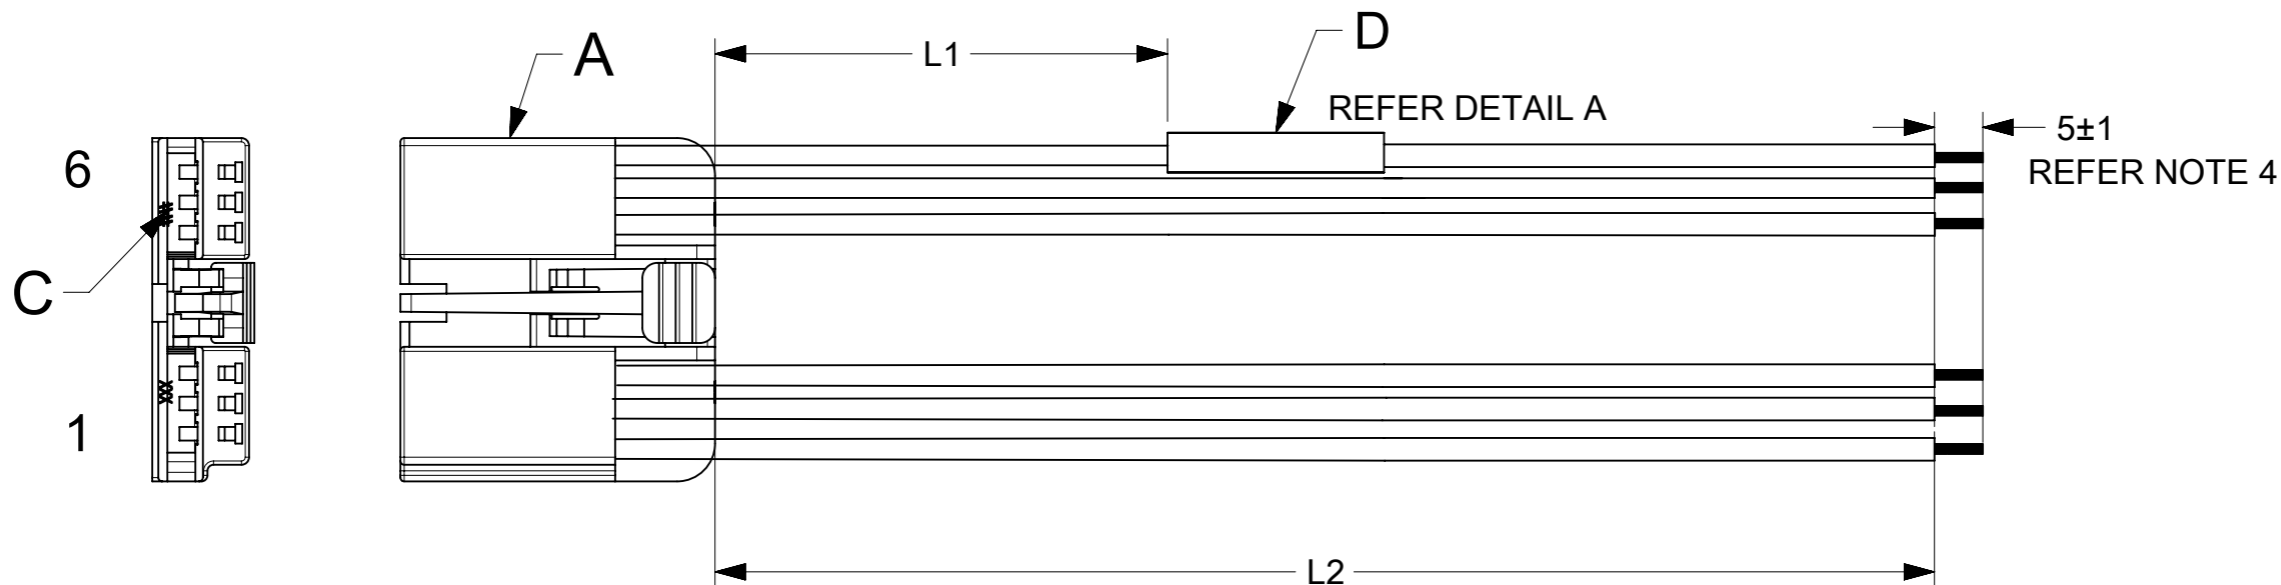

| PART NUMBER | L1 | L2 | TITLE |
|-------------|---------|--------|-----------------------------|
| 2163311061 | 38 REF | 100±5 | EDGE LOCK R-S 6CKT 100MM Sn |
| 2163311062 | 63 REF | 150±8 | EDGE LOCK R-S 6CKT 150MM Sn |
| 2163311063 | 138 REF | 300±10 | EDGE LOCK R-S 6CKT 300MM Sn |
| 2163311064 | 288 REF | 600±15 | EDGE LOCK R-S 6CKT 600MM Sn |

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

NOTES

1. Connector view shown is from mating side.
2. Label text must be 2mm max. in height with Arial font.
3. Label must be wrapped over the bunched cables.
4. The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 0.9mm max.

| | | | | | | |
|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|--------------|----------------------------|----------------|
| FUNCTIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: | | molex | |
| | △/A = 0 | mm NTS | | | | |
| DIVISIONAL SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | EC NO: 643086 | | REFER THE TABLE | |
| | △/E = 0 | ANGULAR TOL ± ° | DRWN: NNANKOLA 2020/08/10 | | PRODUCT CUSTOMER DRAWING | |
| | △/F = 0 | 4 PLACES ± | CHK'D: SD 2020/08/13 | | DOCUMENT NUMBER | |
| | △/G = 0 | 3 PLACES ± | APPR: SD 2020/08/13 | | 2163311061 | |
| | △/H = 0 | 2 PLACES ± | INITIAL REVISION: | | DOC TYPE DOC PART REVISION | |
| 1 PLACE ± | | DRWN: NNANKOLA 2020/07/09 | | PSD 000 A1 | | |
| 0 PLACES ± | | APPR: SD 2020/07/10 | | SHEET NUMBER | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIRD ANGLE PROJECTION | DRAWING | SERIES | MATERIAL NUMBER | CUSTOMER |
| | | ⊕ | A3-SIZE | 216331 | REFER THE TABLE | GENERAL MARKET |
| DOCUMENT STATUS | | P1 | RELEASE DATE | 2020/08/13 | 18:02:11 | 1 OF 1 |