


## T355G396K010AT

T355, Tantalum, MnO2 Tantalum, Commercial Grade, 39 uF, 10%, 10 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 3.18mm

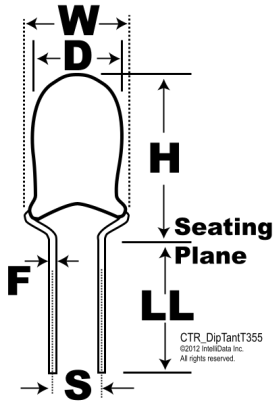

Click [here](#) for the 3D model.

### Dimensions

D	6.3mm
W	6.35mm +/-0.64mm
H	11.4mm
S	3.18mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	500

### General Information

Series	T355
Dielectric	MnO2 Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage, Reverse Voltage
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	39 uF
Capacitance Tolerance	10%
Voltage DC	10 VDC (85C), 7 VDC (125C), 0.1 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	3.1 uA