



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
3		RELEASED AS PER ECO-17-009529	03JUL2017	KH	MP

a) Part as supplied.

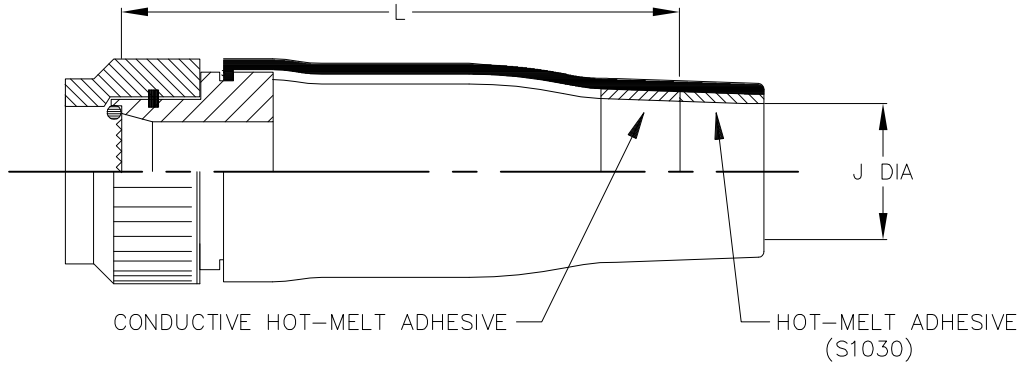

b) Part after unrestricted recovery.

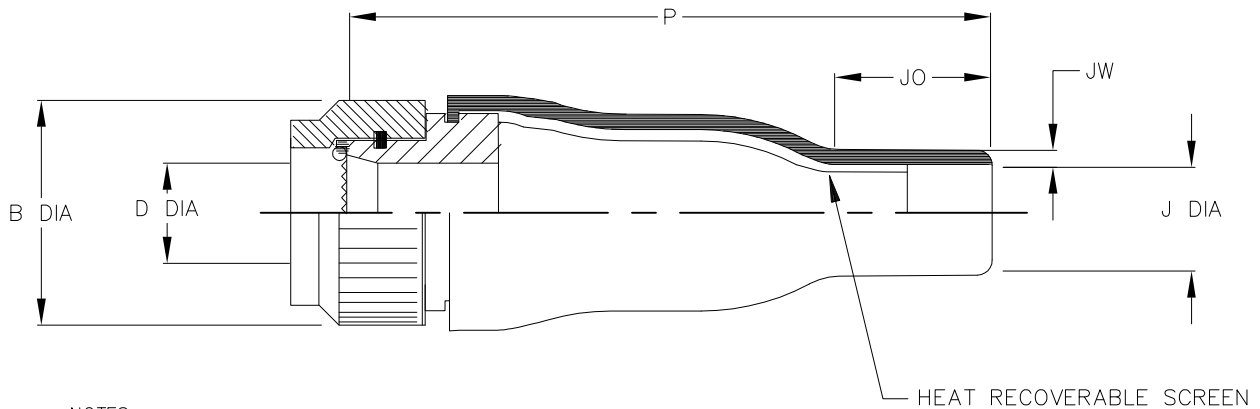

NOTES:

Raychem Connector Code: 40
 Connector Series: MIL-C-38999 SERIES 3 & 4
 Adaptor Series: 208M7**-19C**-KNS (Bright)
 Aluminium Alloy to BS1474 HE30TF, FC1 or 6262
 Electroless Nickel per SAE-AMS-C-26074, Class 3 or 4, Grade B
 Or ASTM B-733, SC2, Type I, Class 5

Moulded Part Material: -100C (Black); Polyolefin/Silver Composites, semi-flexible
 ZEROHAL™ Low fire hazard

Kits to include cleaning tissue, 1 piece 100 grit emery cloth & packing piece.
 Kit to be used in conjunction with installation guide for straight assemblies.

Dimensions in mm [inches for reference]

Part No.	Shell Size	B DIA MAX	D DIA MIN	J		P ±10% b	L REF a	JO REF b	JW ±30% b
				MIN a	MAX b				
KTKK1160AC	A	19.2 [.76]	6.7 [.26]	9 [.35]	6.0 [.24]	72 [2.83]	66 [2.60]	17 [.67]	1.0 [.04]
KTKK1161AC	B	21.7 [.85]	10.1 [.39]	11 [.43]	7.2 [.28]	84 [3.31]	78 [3.07]	20 [.79]	1.0 [.04]
KTKK1162AC	C	25.5 [1.00]	12.9 [.50]	17 [.67]	8.5 [.33]	97 [3.82]	88 [3.46]	25 [.98]	1.0 [.04]
KTKK1163AC	D	29.3 [1.15]	16.1 [.63]	17 [.67]	8.5 [.33]	97 [3.82]	88 [3.46]	25 [.98]	1.0 [.04]
KTKK1164AC	E	31.9 [1.26]	19.4 [.76]	21 [.83]	10.0 [.39]	122 [4.80]	110 [4.33]	30 [1.18]	1.2 [.05]
KTKK1165AC	F	35.7 [1.41]	22.1 [.87]	21 [.83]	10.0 [.39]	122 [4.80]	110 [4.33]	30 [1.18]	1.2 [.05]
KTKK1166AC	G	38.2 [1.50]	25.4 [1.00]	29 [1.14]	15.8 [.62]	147 [5.79]	132 [5.20]	30 [1.18]	1.5 [.06]
KTKK1167AC	H	42.0 [1.65]	28.4 [1.12]	29 [1.14]	15.8 [.62]	147 [5.79]	132 [5.20]	30 [1.18]	1.5 [.06]
KTKK1168AC	J	44.6 [1.76]	30.9 [1.22]	37 [1.46]	16.8 [.66]	117 [4.61]	103 [4.06]	38 [1.49]	2.4 [.09]

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. COPYRIGHT 2016 By TE Connectivity

DIMENSIONS:
mm [INCHES]

DWN K. HOLAL 14OCT2016
 CHK N. NAGAR 14OCT2016

MATERIAL SEE NOTES

FINISH SEE NOTES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

APVD M. POPE 14OCT2016



TE Connectivity

PRODUCT SPEC

NAME ADAPTOR ASSEMBLY

APPLICATION SPEC

SIZE A4 CAGE CODE 00779 DRAWING NO C-KTKK1160AC-1168AC

RESTRICTED TO

WEIGHT

CUSTOMER DRAWING

SCALE DNS SHEET 1 OF 1 REV 3

