

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014021	MiniFit Jr SR Recpt Hsg 2 CKT V-0	1	PC
B	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	2	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	-	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	-	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

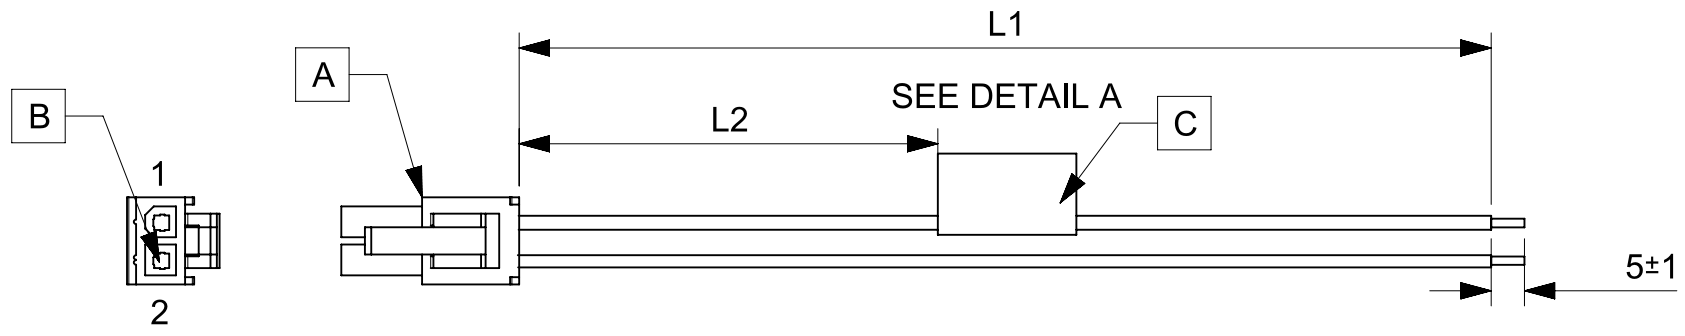


TABLE			
PART NUMBER	L1	L2	TITLE
2153212021	150±8	63 REF	MINIFIT JR SR R-S 2 CIRCUIT 150MM Au
2153212022	300±10	138 REF	MINIFIT JR SR R-S 2 CIRCUIT 300MM Au
2153212023	600±10	288 REF	MINIFIT JR SR R-S 2 CIRCUIT 600MM Au

- NOTES**
1. Connector view shown is from mating side.
  2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
  3. Label text must be 2mm max. in height with Arial font.
  4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
 MOLEX  
 BATCH WK/YR  
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 638380		
	mm	NTS	DRWN: ARAJU 2020/03/05		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/05/28		
ANGULAR TOL ± °		APPR: RDESAI01 2020/05/28		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE
3 PLACES ±		DRWN: ARAJU 2020/03/05		2153212021	PSD
2 PLACES ±		APPR: RDESAI01 2020/05/28		000	A
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NUMBER	CUSTOMER
0 PLACES ±		THIRD ANGLE PROJECTION	DRAWING	SEE TABLE	GENERAL MARKET
			SERIES	SHEET NUMBER	
			A4-SIZE	1 OF 1	