



power contactor, AC-3 115 A, 55 kW / 400 V AC (50-60 Hz) / DC operation
200-277 V AC/DC auxiliary contacts 2 NO + 2 NC 3-pole, frame size S6
busbar connections drive: electronic with PLC interface 24 V DC spring-
loaded terminal

| | |
|---|---|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT1 |
| General technical data | |
| size of contactor | S6 |
| product extension | |
| <ul style="list-style-type: none"> function module for communication auxiliary switch | <p>No</p> <p>Yes</p> |
| power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> at AC in hot operating state at AC in hot operating state per pole without load current share typical | <p>21 W</p> <p>7 W</p> <p>2.8 W</p> |
| insulation voltage | |
| <ul style="list-style-type: none"> of main circuit with degree of pollution 3 rated value of auxiliary circuit with degree of pollution 3 rated value | <p>1 000 V</p> <p>500 V</p> |
| surge voltage resistance | |
| <ul style="list-style-type: none"> of main circuit rated value of auxiliary circuit rated value | <p>8 kV</p> <p>6 kV</p> |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1 | 690 V |
| shock resistance at rectangular impulse | |
| <ul style="list-style-type: none"> at AC at DC | <p>8,5g / 5 ms, 4,2g / 10 ms</p> <p>8,5g / 5 ms, 4,2g / 10 ms</p> |
| shock resistance with sine pulse | |
| <ul style="list-style-type: none"> at AC at DC | <p>13,4g / 5 ms, 6,5g / 10 ms</p> <p>13,4g / 5 ms, 6,5g / 10 ms</p> |
| mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> of contactor typical of the contactor with added electronically optimized auxiliary switch block typical of the contactor with added auxiliary switch block typical | <p>10 000 000</p> <p>5 000 000</p> <p>10 000 000</p> |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2012 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> during operation during storage | <p>-25 ... +60 °C</p> <p>-55 ... +80 °C</p> |

| | |
|--|--------------------|
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| • at AC-3 rated value maximum | 1 000 V |
| • at AC-3e rated value maximum | 1 000 V |
| operational current | |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value | 160 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 160 A |
| — up to 690 V at ambient temperature 60 °C rated value | 140 A |
| — up to 1000 V at ambient temperature 40 °C rated value | 80 A |
| — up to 1000 V at ambient temperature 60 °C rated value | 80 A |
| • at AC-3 | |
| — at 400 V rated value | 115 A |
| — at 500 V rated value | 115 A |
| — at 690 V rated value | 115 A |
| — at 1000 V rated value | 53 A |
| • at AC-3e | |
| — at 400 V rated value | 115 A |
| — at 500 V rated value | 115 A |
| — at 690 V rated value | 115 A |
| — at 1000 V rated value | 53 A |
| • at AC-4 at 400 V rated value | 97 A |
| • at AC-5a up to 690 V rated value | 140 A |
| • at AC-5b up to 400 V rated value | 95 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 115 A |
| — up to 400 V for current peak value n=20 rated value | 115 A |
| — up to 500 V for current peak value n=20 rated value | 115 A |
| — up to 690 V for current peak value n=20 rated value | 115 A |
| — up to 1000 V for current peak value n=20 rated value | 53 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 98 A |
| — up to 400 V for current peak value n=30 rated value | 98 A |
| — up to 500 V for current peak value n=30 rated value | 98 A |
| — up to 690 V for current peak value n=30 rated value | 98 A |
| — up to 1000 V for current peak value n=30 rated value | 53 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 70 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 54 A |
| • at 690 V rated value | 48 A |
| operational current | |
| • at 1 current path at DC-1 | |

| | |
|--|------------|
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 18 A |
| — at 220 V rated value | 3.4 A |
| — at 440 V rated value | 0.8 A |
| — at 600 V rated value | 0.5 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 20 A |
| — at 440 V rated value | 3.2 A |
| — at 600 V rated value | 1.6 A |
| • with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 160 A |
| — at 440 V rated value | 11.5 A |
| — at 600 V rated value | 4 A |
| • at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 2.5 A |
| — at 220 V rated value | 0.6 A |
| — at 440 V rated value | 0.17 A |
| — at 600 V rated value | 0.12 A |
| • with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 2.5 A |
| — at 440 V rated value | 0.65 A |
| — at 600 V rated value | 0.37 A |
| • with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 160 A |
| — at 440 V rated value | 1.4 A |
| — at 600 V rated value | 0.75 A |
| operating power | |
| • at AC-3 | |
| — at 230 V rated value | 37 kW |
| — at 400 V rated value | 55 kW |
| — at 500 V rated value | 75 kW |
| — at 690 V rated value | 110 kW |
| — at 1000 V rated value | 75 kW |
| • at AC-3e | |
| — at 230 V rated value | 37 kW |
| — at 400 V rated value | 55 kW |
| — at 500 V rated value | 75 kW |
| — at 690 V rated value | 110 kW |
| — at 1000 V rated value | 75 kW |
| operating power for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 29 kW |
| • at 690 V rated value | 48 kW |
| operating apparent power at AC-6a | |
| • up to 230 V for current peak value n=20 rated value | 40 000 kVA |
| • up to 400 V for current peak value n=20 rated value | 80 000 VA |
| • up to 500 V for current peak value n=20 rated value | 100 000 VA |
| • up to 690 V for current peak value n=20 rated value | 130 000 VA |
| • up to 1000 V for current peak value n=20 rated value | 90 000 VA |
| operating apparent power at AC-6a | |
| • up to 230 V for current peak value n=30 rated value | 30 000 VA |

| | |
|---|--|
| <ul style="list-style-type: none"> • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value | <p>60 000 VA 80 000 VA 110 000 VA 90 000 VA</p> |
| short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum | <p>2 565 A; Use minimum cross-section acc. to AC-1 rated value 1 654 A; Use minimum cross-section acc. to AC-1 rated value 1 170 A; Use minimum cross-section acc. to AC-1 rated value 729 A; Use minimum cross-section acc. to AC-1 rated value 572 A; Use minimum cross-section acc. to AC-1 rated value</p> |
| no-load switching frequency <ul style="list-style-type: none"> • at AC • at DC | <p>1 000 1/h 1 000 1/h</p> |
| operating frequency <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3e maximum • at AC-4 maximum | <p>800 1/h 400 1/h 1 000 1/h 1 000 1/h 130 1/h</p> |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | <p>200 ... 277 V 200 ... 277 V</p> |
| control supply voltage at DC <ul style="list-style-type: none"> • rated value | 200 ... 277 V |
| type of PLC-control input according to IEC 60947-1 | Type 2 |
| consumed current at PLC-control input according to IEC 60947-1 maximum | 20 mA |
| voltage at PLC-control input rated value | 24 V |
| operating range factor of the voltage at PLC-control input | 0.8 ... 1.1 |
| operating range factor control supply voltage rated value of magnet coil at DC <ul style="list-style-type: none"> • initial value • full-scale value | <p>0.8 1.1</p> |
| operating range factor control supply voltage rated value of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>0.8 ... 1.1 0.8 ... 1.1</p> |
| design of the surge suppressor | with varistor |
| apparent pick-up power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>280 VA 280 VA</p> |
| inductive power factor with closing power of the coil <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>0.8 0.8</p> |
| apparent holding power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>4.4 VA 4.4 VA</p> |
| inductive power factor with the holding power of the coil <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>0.5 0.5</p> |
| closing power of magnet coil at DC | 320 W |
| holding power of magnet coil at DC | 2.8 W |
| closing delay <ul style="list-style-type: none"> • at AC • at DC | <p>35 ... 75 ms 35 ... 75 ms</p> |
| opening delay | |

| | |
|--|--|
| <ul style="list-style-type: none"> • at AC | 80 ... 90 ms |
| <ul style="list-style-type: none"> • at DC | 80 ... 90 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | PLC-IN or Standard A1 - A2 (adjustable) |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts instantaneous contact | 2 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| <ul style="list-style-type: none"> • at 230 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 400 V rated value | 3 A |
| <ul style="list-style-type: none"> • at 500 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 60 V rated value | 6 A |
| <ul style="list-style-type: none"> • at 110 V rated value | 3 A |
| <ul style="list-style-type: none"> • at 125 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 220 V rated value | 1 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |
| <ul style="list-style-type: none"> • at 48 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 60 V rated value | 2 A |
| <ul style="list-style-type: none"> • at 110 V rated value | 1 A |
| <ul style="list-style-type: none"> • at 125 V rated value | 0.9 A |
| <ul style="list-style-type: none"> • at 220 V rated value | 0.3 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value | 124 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 125 A |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value | 25 hp |
| <ul style="list-style-type: none"> • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value | 40 hp |
| <ul style="list-style-type: none"> — at 220/230 V rated value | 50 hp |
| <ul style="list-style-type: none"> — at 460/480 V rated value | 100 hp |
| <ul style="list-style-type: none"> — at 575/600 V rated value | 125 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required | gG: 355 A (690 V, 100 kA) gG: 250 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 250 A (415 V, 50 kA) |
| <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |
| <ul style="list-style-type: none"> • side-by-side mounting | Yes |
| height | 172 mm |
| width | 120 mm |
| depth | 170 mm |

| | |
|--|--|
| required spacing | |
| <ul style="list-style-type: none"> ● with side-by-side mounting <ul style="list-style-type: none"> — forwards 20 mm — upwards 10 mm — downwards 10 mm — at the side 0 mm ● for grounded parts <ul style="list-style-type: none"> — forwards 20 mm — upwards 10 mm — at the side 10 mm — downwards 10 mm ● for live parts <ul style="list-style-type: none"> — forwards 20 mm — upwards 10 mm — downwards 10 mm — at the side 10 mm | |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> ● for main current circuit Connection bar ● for auxiliary and control circuit spring-loaded terminals ● at contactor for auxiliary contacts Spring-type terminals ● of magnet coil Spring-type terminals | |
| width of connection bar | 17 mm |
| thickness of connection bar | 3 mm |
| diameter of holes | 9 mm |
| number of holes | 1 |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> ● at AWG cables for main contacts 4 ... 250 kcmil | |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> ● stranded 25 ... 120 mm² | |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> ● solid or stranded 0.25 ... 2.5 mm² ● finely stranded with core end processing 0.25 ... 1.5 mm² ● finely stranded without core end processing 0.25 ... 2.5 mm² | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> ● for auxiliary contacts <ul style="list-style-type: none"> — solid 2x (0.25 ... 2.5 mm²) — solid or stranded 2x (0,25 ... 2,5 mm²) — finely stranded with core end processing 2x (0.25 ... 1.5 mm²) — finely stranded without core end processing 2x (0.25 ... 2.5 mm²) ● at AWG cables for auxiliary contacts 2x (24 ... 14) | |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> ● for auxiliary contacts 24 ... 14 | |
| Safety related data | |
| product function | |
| <ul style="list-style-type: none"> ● mirror contact according to IEC 60947-4-1 Yes ● positively driven operation according to IEC 60947-5-1 No | |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| protection class IP on the front according to IEC 60529 | IP00; IP20 with box terminal/cover |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front with box terminal/cover |
| suitability for use | |
| <ul style="list-style-type: none"> ● safety-related switching OFF Yes | |
| Certificates/ approvals | |
| General Product Approval | |



[Confirmation](#)



[KC](#)



| | | | |
|-----|---------------------------------------|---------------------------|-------------------|
| EMC | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|-----|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)



EG-Konf.



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

| | |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

| | |
|-------|---------|
| other | Railway |
|-------|---------|

[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1054-2NP36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1054-2NP36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-2NP36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1054-2NP36&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-2NP36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1054-2NP36&objecttype=14&gridview=view1>

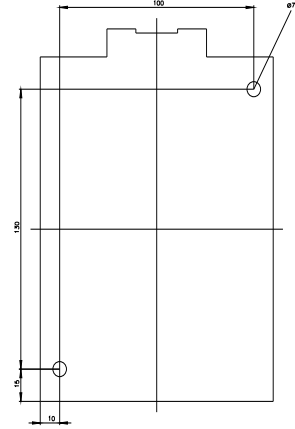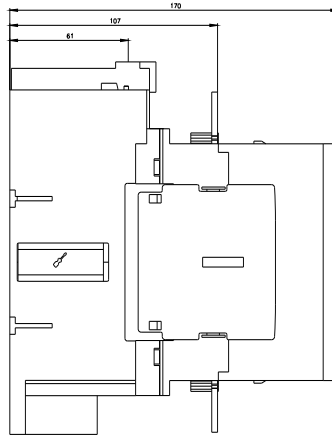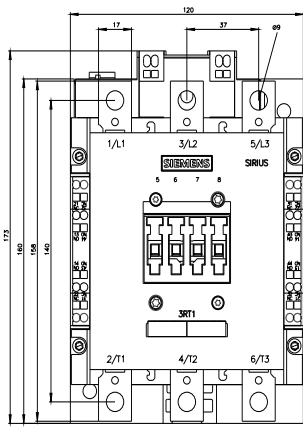

last modified:

3/24/2022 