


DETAIL "A"
CHAMFER
SCALE=6:1

SEE
DETAIL "A"

SECTION A-A

NET IMPEDANCE (Z)			
Frequency	300 MHz	500 MHz	1 GHz
Nominal (REF)	165 Ω	190 Ω	185 Ω
Minimum	- Ω	152 Ω	- Ω

NET Z,R AND X vs. FREQUENCY
(REF. ONLY)

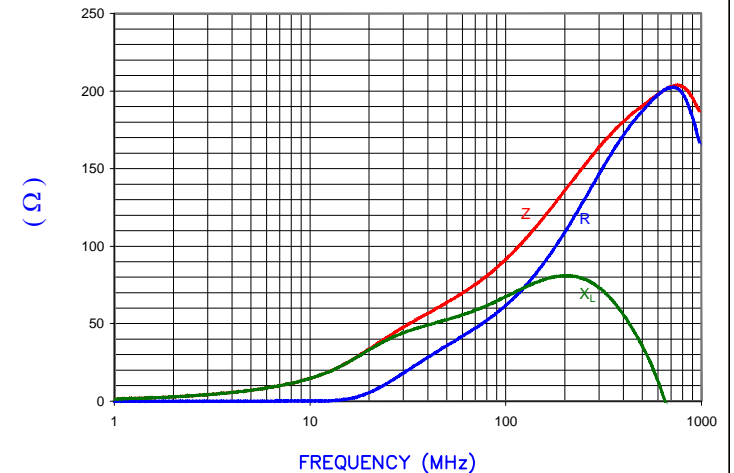

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture


FERRITE CORE DIMENSIONS (SPEC) MM [Inches]:

A	15.24 [.600]	±	0.30 [.012]
B	3.38 [.133]	±	0.13 [.005]
C	10.00 [.394]	±	0.20 [.008]

WEIGHT/1000 8.55 kgs [18.84 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED.

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

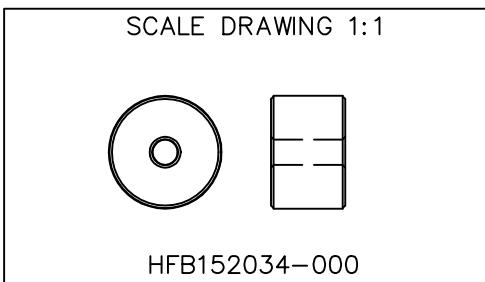

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
C	UPDATE COMPANY LOGO	01/07/13	QIU	PROJECT/PART NUMBER: HFB152034-000		REV C	DRAWN BY: JRK
B	UPDATE FORMAT & Z SPECS	03/26/03	JRK	DATE: 10/17/02	SCALE: 3:1	MATERIAL: HF	
A	ORIGINAL DRAFT	10/17/02	JRK	CAD # HFB152034-000-C	TOOL # B0600		
REV	DESCRIPTION	DATE	INT				