

(2.00 mm) .0787"

TCMD SERIES

HIGH-RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*, ESQT,
PTF, SQT, SQW, TLE

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:
Black Glass Filled Polyester
Terminal:
Phosphor Bronze
Plating:
Au or Sn over
50 μm (1.27 μm) Ni
Wire:
28 AWG 7/36 Stranded,
Tinned, Copper with
Gray PVC Insulator
Current Rating:
2.6 A per pin
(2 pins powered)
Operating Temp Range:
-40 °C to +105 °C
RoHS Compliant:
Yes

RECOGNITIONS














For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- Other sizes

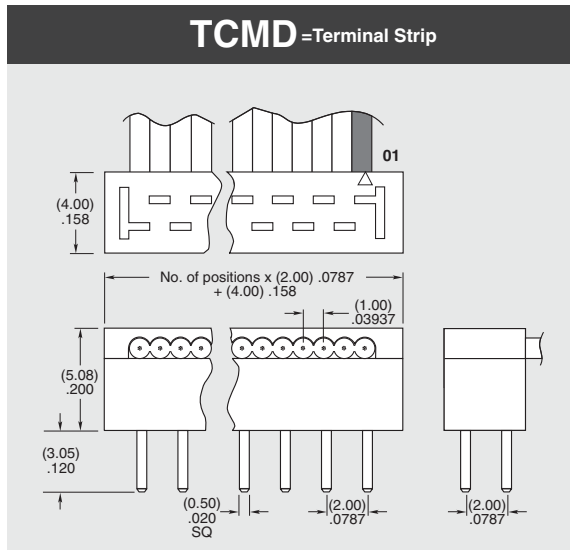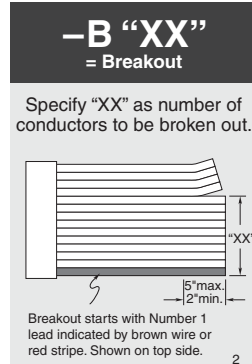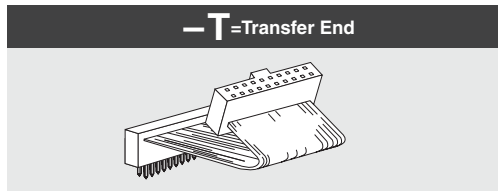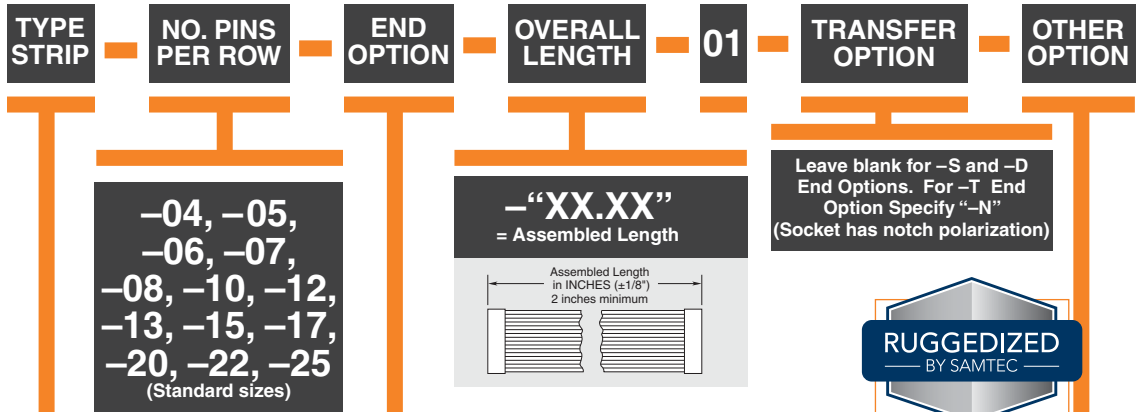

***Note:**
Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.)
When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note:
TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.